

Beamstrahlung Background Simulation Status Report

Alejandro Pérez
IPHC – CNRS Strasbourg

Inputs from DESY ILC Group


Outline

- **Latest related software developments**
- **Latest Beamstahlung Pre-production**
- **Some very preliminary results**
- **Summary and Outlook**

Latest Related Software Developments


Guinea-Pig output reader

- Guinea-Pig generator: ascii file with a list of primaries from a bunch-crossing
 - Format:
Sign-E(GeV) β_x β_y β_z Vtx(nm) Vty(nm) Vtz(nm)
- Reader implemented in DD4Hep

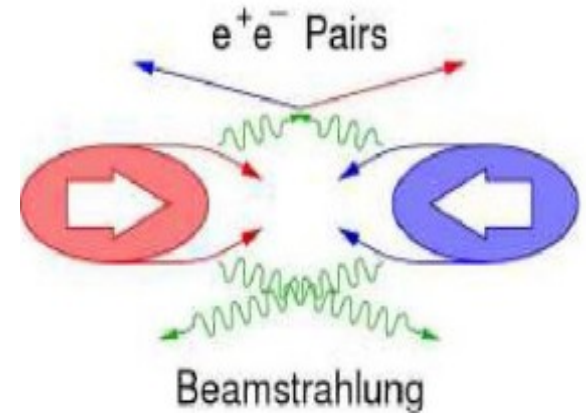


Anti-DID field map reader

- Field map produced with finite element analysis
 - (B_x, B_y, B_z) field @ 3D grid points (X_i, Y_i, Z_i)
- FieldXYZ reader implemented in ILCSoft/lcgeo
 - B-field is a 3D linear interpolation using Field-Map grip points
 - Possibility to apply global scale factor
 \Rightarrow antiDID tuning

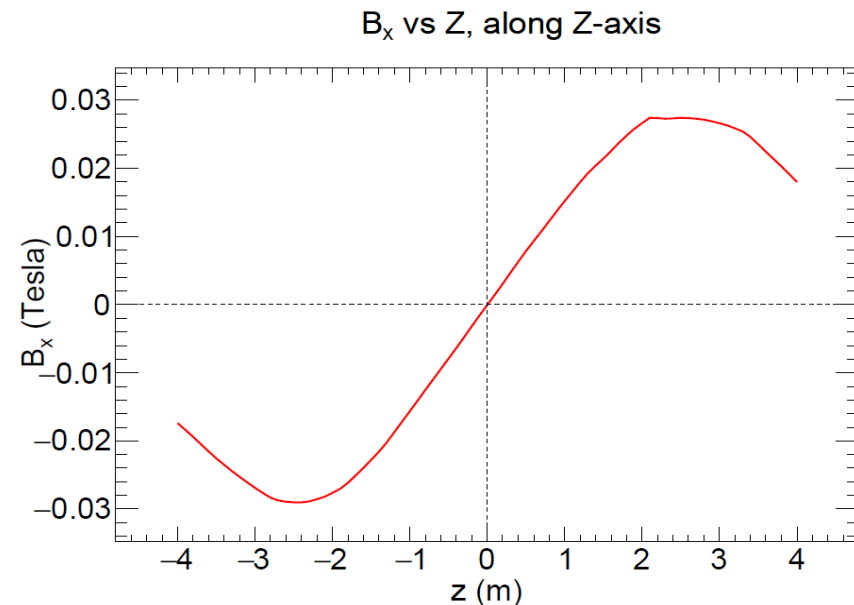

Latest Beamstrahlung Pre-prod: ILD Detector Model

- For the present study study use ILD_o1_v05: legacy model (DBD)
- Other detector models also available which could me studies in the future

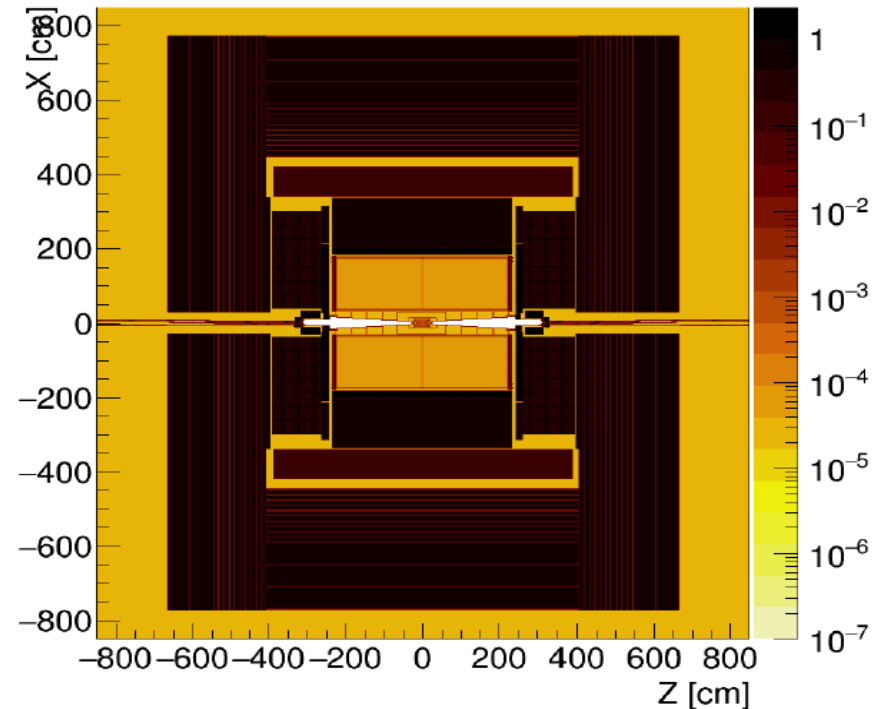

Other Detector Models

HCAL technology	HCAL geometry	Large	Small
Scintillator	T	ILD_l1_v01	ILD_s1_v01
RPC	V	ILD_l2_v01	ILD_s2_v01
combined	T	ILD_l4_v01	

Latest Beamstrahlung Pre-prod: Solenoidal Field


■ Solenoidal field map

- Finite element analysis calculation (DESY)
- $B_z = 3.5$ Tesla B_z field inside Tracker with Standard Yoke
- Azimuthal symmetry, and mirror symmetry of B_z w.r.t origin


⇒ B_z and B_r component in grid of Z and ρ coordinates

NOTE: currently step-size is 10 cm. Smaller step should be studied!

Solenoid B_z vs ρ and Z

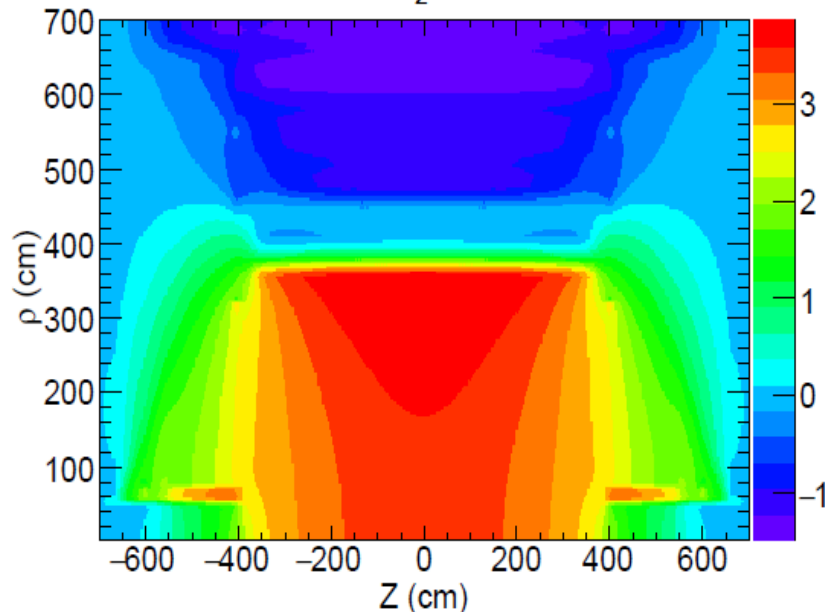

Solenoid B_ρ vs ρ and Z

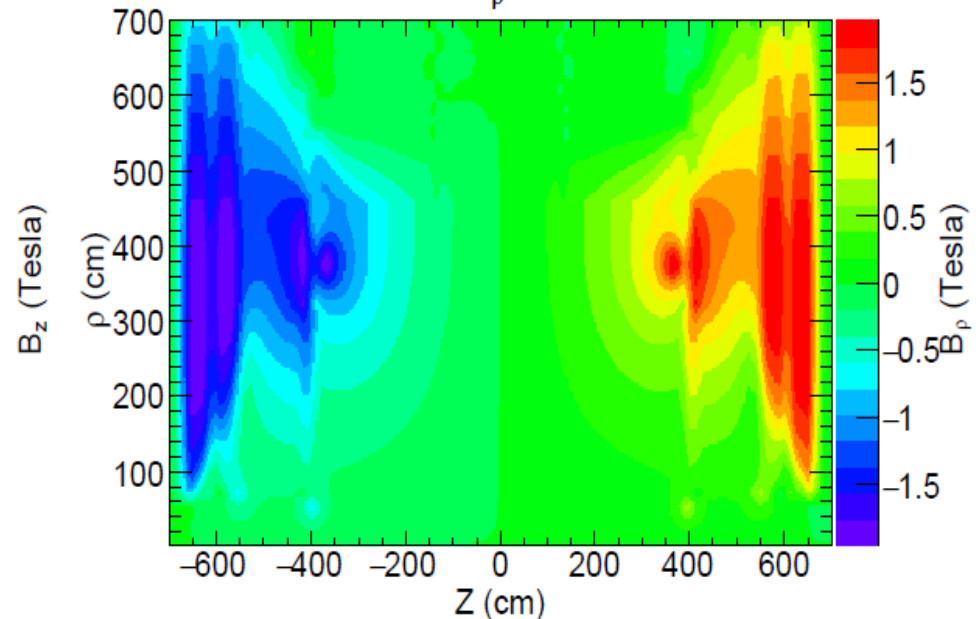


Latest Beamstrahlung Pre-prod: Anti-DID field

■ Anti-DID field map

- Finite element analysis calculation (DESY)
 - $B_x = \pm 30$ mTesla for $Z \approx 3$ m along Z-axis
 - No symmetries exploited
- $\Rightarrow B_x, B_y$ and B_z components in grid of X, Y and Z coordinates

NOTE: currently step-size is 10 cm. Smaller step should be studied!


anti-DID field map @ X = 0

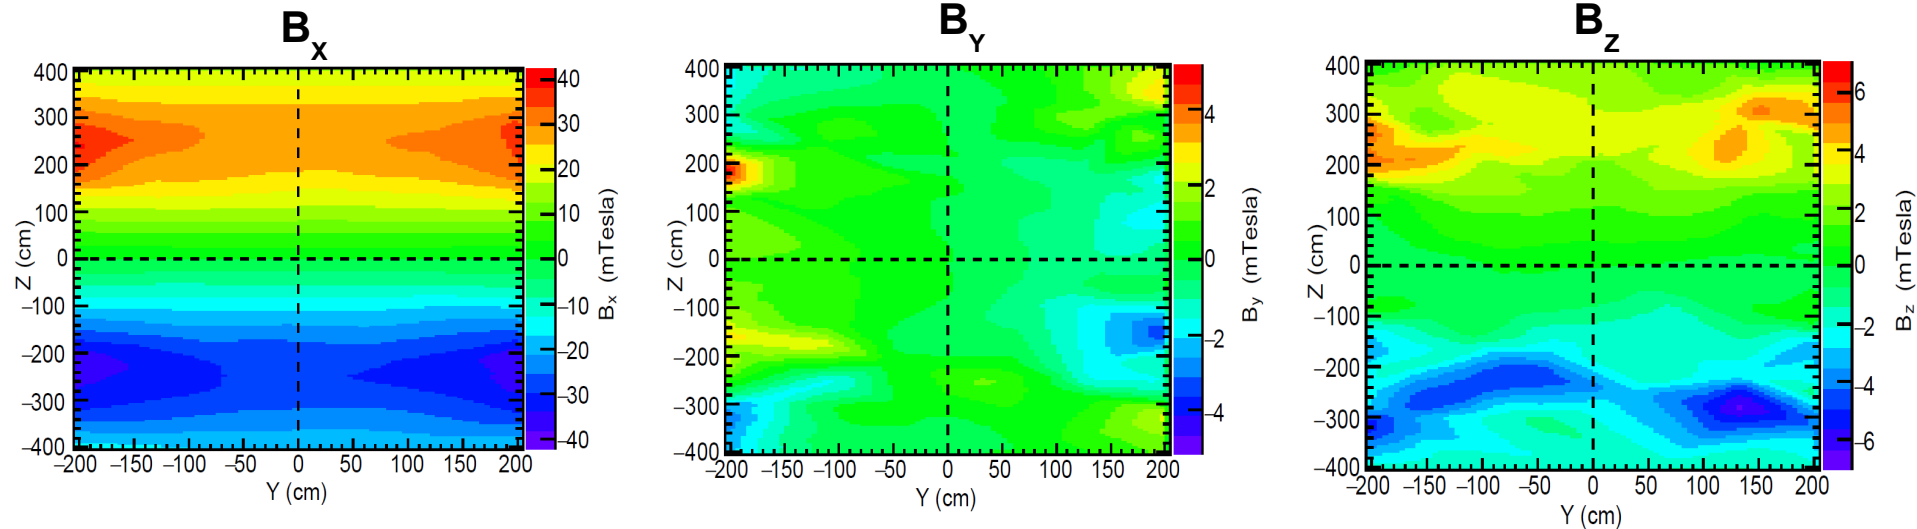

Latest Beamstrahlung Pre-prod: e^+e^- pairs primaries


Available samples

- E_{beam} (E_{CM}): 250 (500) GeV
 - #bunches = 1312
 - Crossing angle = 14 mrad
- E_{beam} (E_{CM}): 350 (700) GeV
 - #bunches = 1312
 - Crossing angle = 14 mrad
- E_{beam} (E_{CM}): 500 (1000) GeV
 - #bunches = 1325
 - Crossing angle = 14 mrad

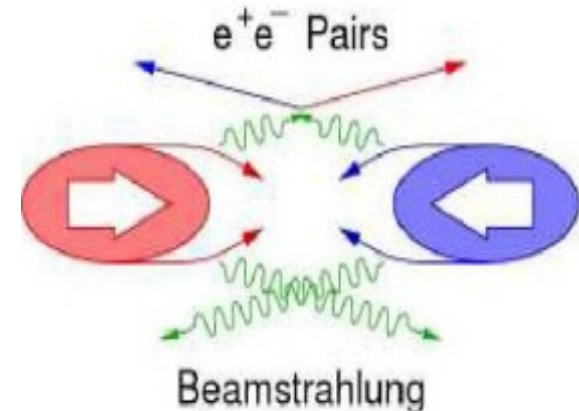


Pre-production

- Simulated 100 BX of the $E_{\text{beam}} = 250$ & 500 GeV samples w/o anti-DID

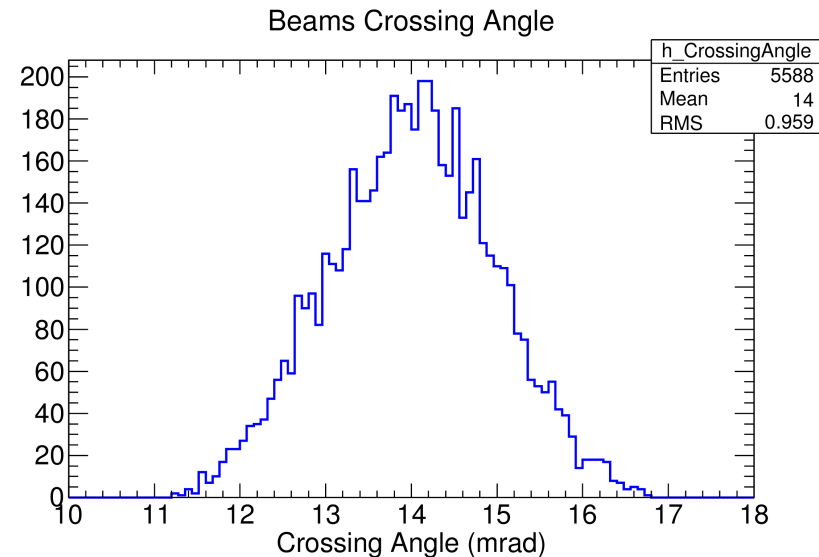

Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: VXD (I)

X vs Y projection of VXD Hit map Rate

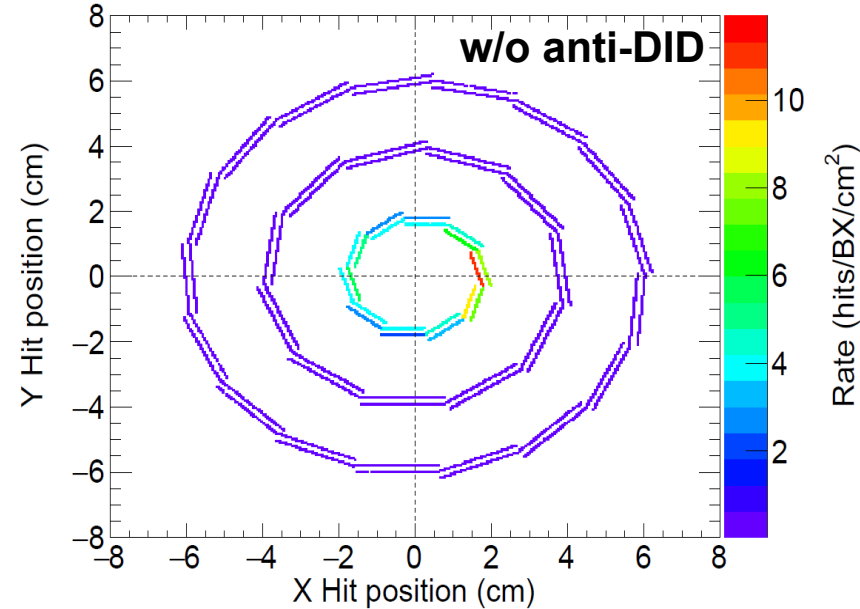

- Current results w/o anti-DID quite in agreement with previous results
- Anti-DID reduces moderately rates on VXD
 - ~ 25 - 35 % in layers 1 – 2
 - ~ 15 - 20 % in layers 3 – 4
 - ~ 18 % in layers 5 – 6



Layer	Units	DBD Prev	This Prod w/o antiDID	This Prod w/ anti-DID
1	Hits/BX/cm ²	6.32 ± 1.76	5.75 ± 0.02	4.35 ± 0.02
2		4.00 ± 1.18	4.05 ± 0.01	2.60 ± 0.01
3		0.25 ± 0.11	0.177 ± 0.001	0.137 ± 0.001
4		0.21 ± 0.09	0.134 ± 0.001	0.113 ± 0.001
5		0.04 ± 0.03	0.038 ± 0.001	0.031 ± 0.001
6		0.04 ± 0.03	0.033 ± 0.001	0.027 ± 0.001

Note: current results error is stat-only

Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: VXD (II)

■ Particles hitting VXD produced mainly @

- IP: 60 – 80 %
- Very Fwd and Bwd ($|Z| > 3 \text{ m}$): 15 – 30 % (Back-scattered particles)
- Inside inner detector: 5 – 10 %

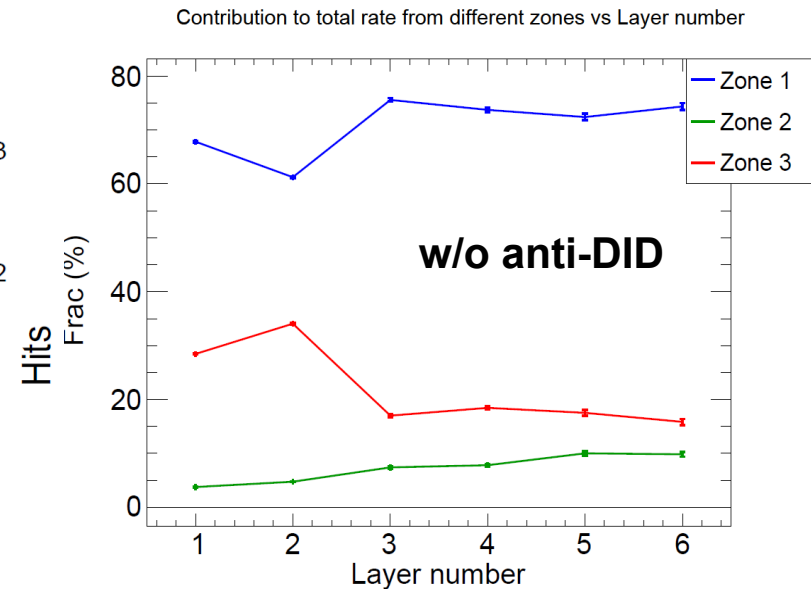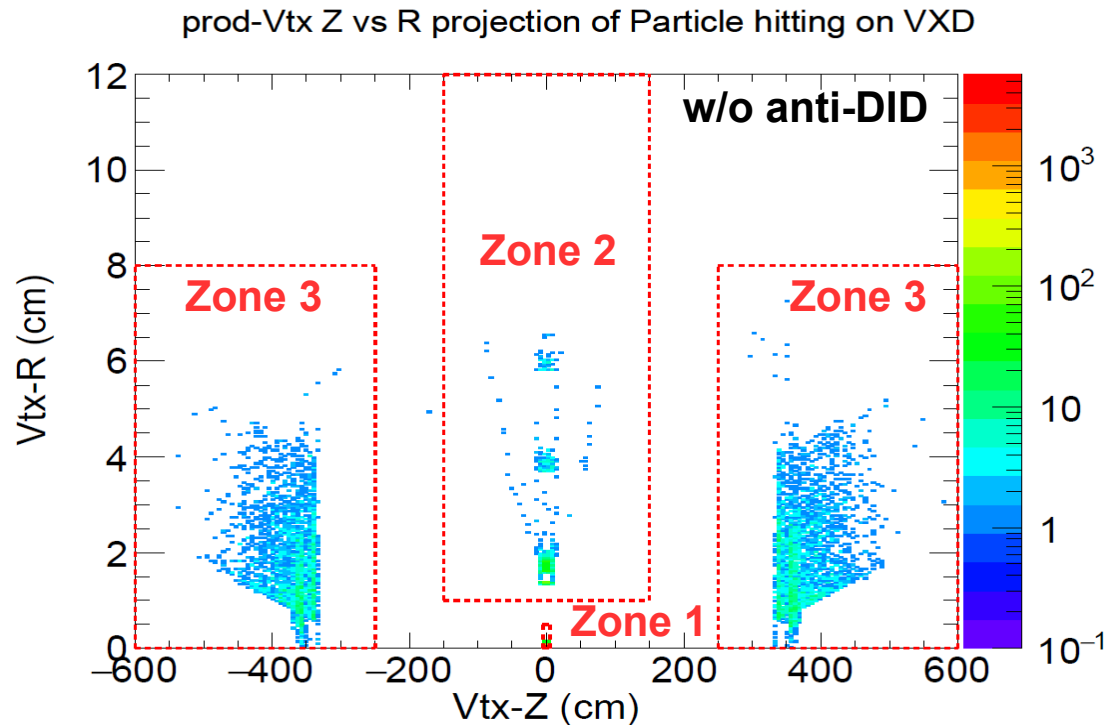


Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: VXD (III)


- **Anti-DID main effect is to reduce the back-scattered component of the hit rate**
 - From 20 – 30 % \rightarrow 10 – 25 %
- **Bkg particles tend to be better aligned within the beam pipe**
- **Some tuning is needed which should be E_{beam} dependent**

**Production vertex in Fwd/Bwd ($|Z| > 3 \text{ m}$)
region of particles hitting VXD**

prod-Vtx X vs Y projection of Particle hitting VXD, Zone 3




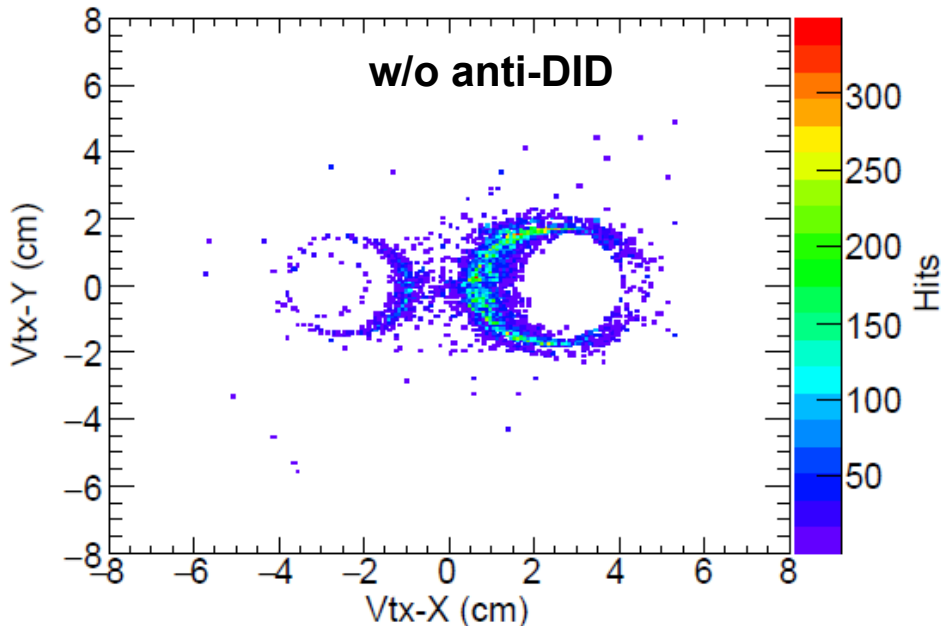


prod-Vtx X vs Y projection of Particle hitting VXD, Zone 3

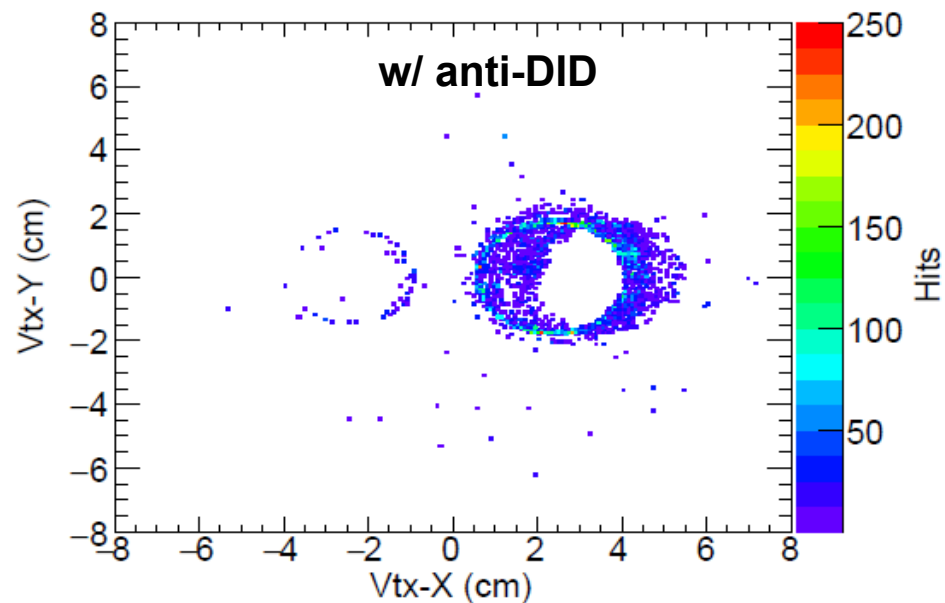


Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: VXD (IV)

Some Beamstrahlung Bkg features on VXD

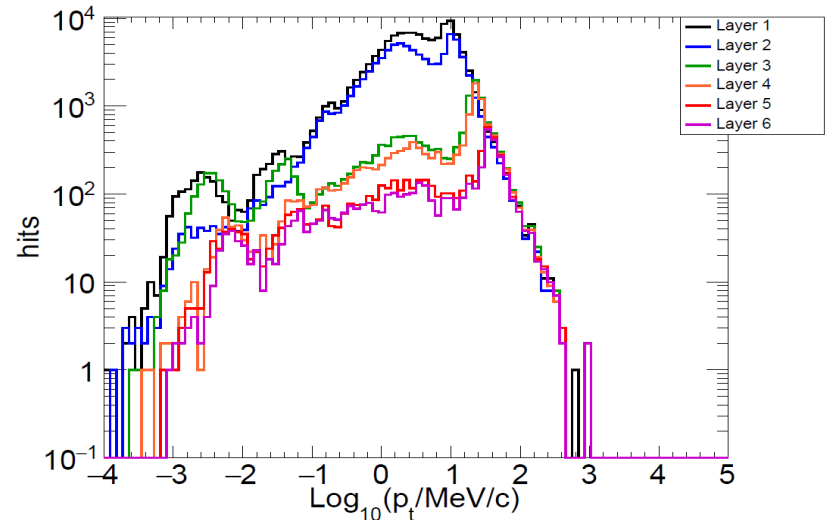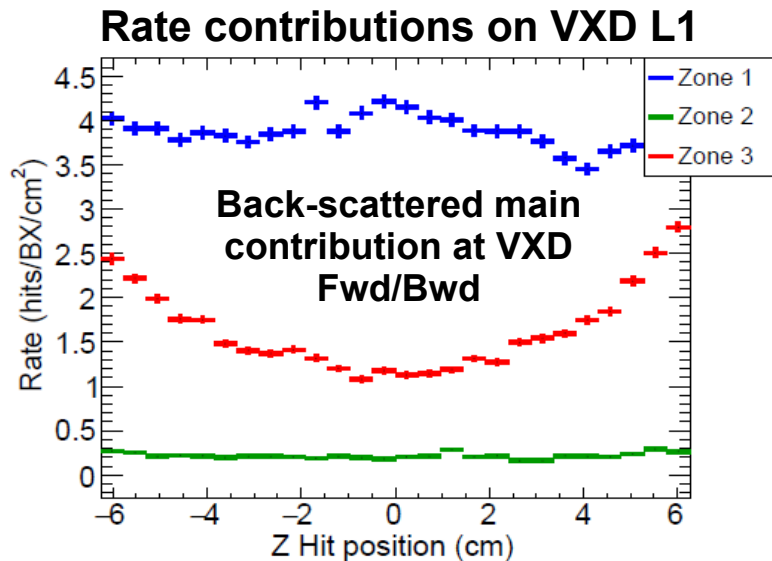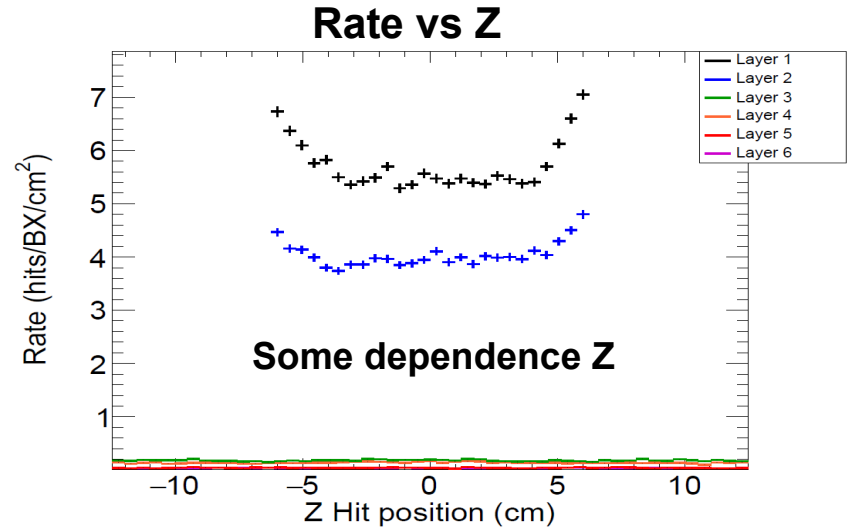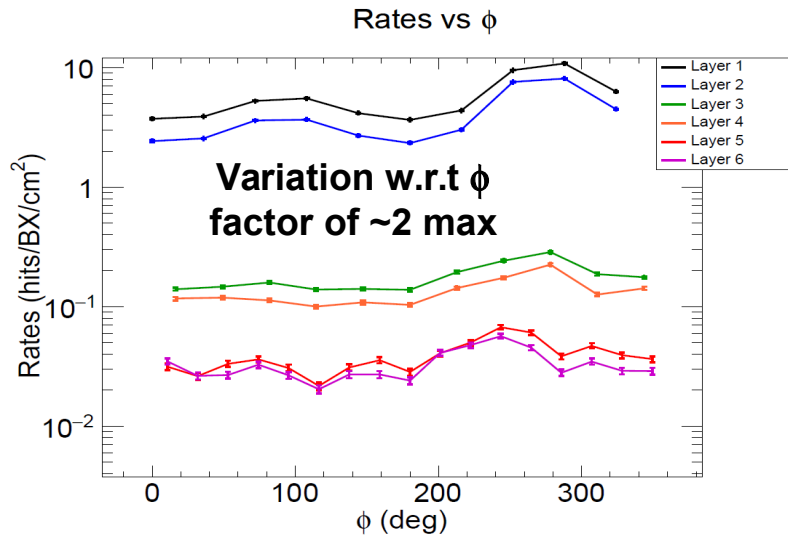

Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: SIT

X vs Y projection of SIT Hit map

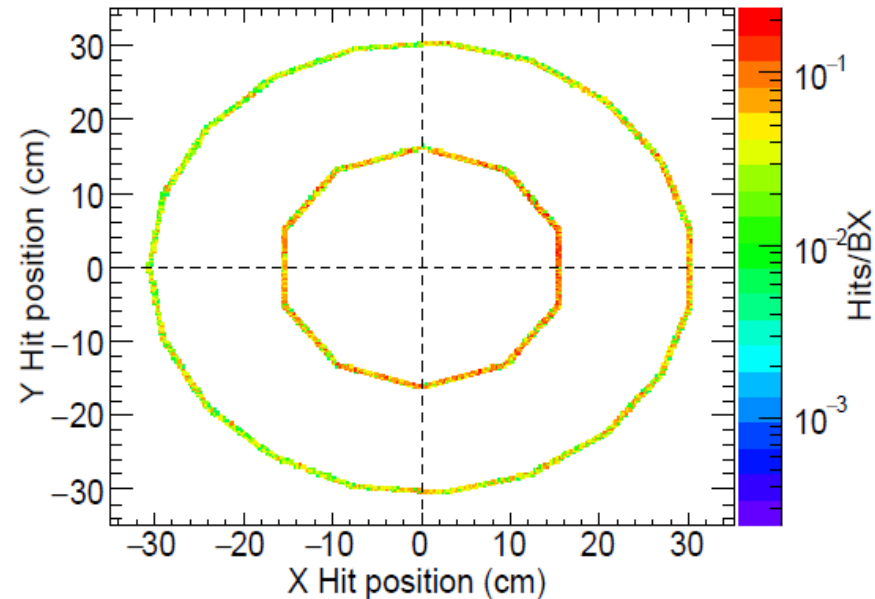


- Current results w/o anti-DID in **disagreement** with previous results
- Anti-DID reduces rates significantly on SIT
 - ~ 53 % in layer 1
 - ~ 62 % in layer 2

La yer	Units	DBD Prev	This Prod w/o antiDID	This Prod w/ anti-DID
1	$\times 10^{-3}$ Hits/BX/cm ²	0.9 ± 1.3	9.73 ± 0.10	4.56 ± 0.07
3		0.2 ± 0.3	3.13 ± 0.03	1.20 ± 0.02

**Note: current results
error is stat-only**

Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: FTD

- Current results w/o anti-DID in agreement with previous results
- Anti-DID reduces rates on FTD
 - 5 - 30 % depending on the layer

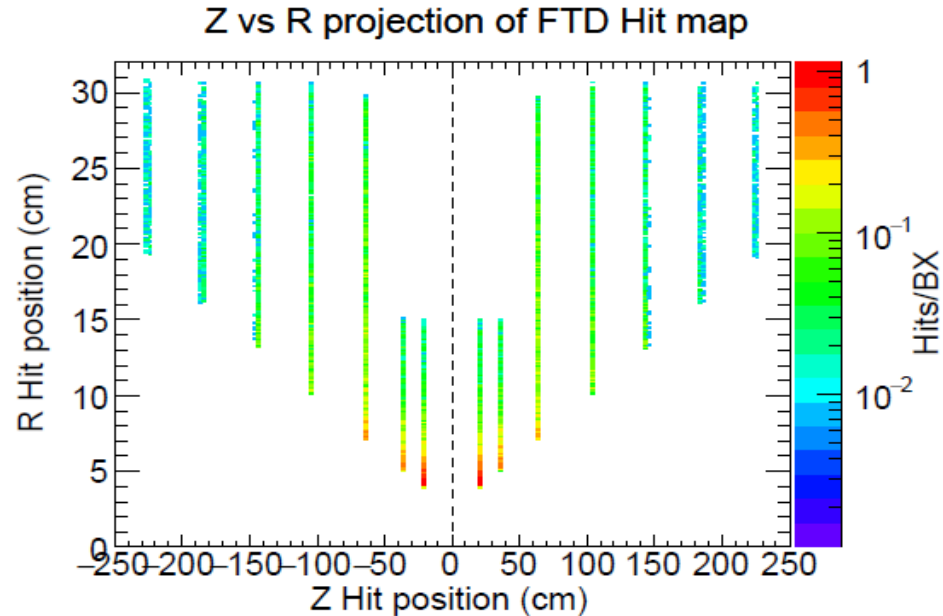


Layer	Units	DBD Prev	This Prod w/o antiDID	This Prod w/ anti-DID
1	$\times 10^{-2} \text{ Hits/BX/cm}^2$	7.2 ± 2.4	2.32 ± 0.03	1.88 ± 0.03
2		4.6 ± 1.7	1.42 ± 0.03	1.16 ± 0.02
3		2.5 ± 0.9	0.712 ± 0.009	0.470 ± 0.008
4		1.6 ± 0.5	0.351 ± 0.006	0.252 ± 0.006
5		1.1 ± 0.4	0.235 ± 0.006	0.171 ± 0.005
6		0.7 ± 0.4	0.140 ± 0.005	0.113 ± 0.004
7		0.6 ± 0.3	0.107 ± 0.004	0.100 ± 0.004

Note: current results error is stat-only

Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: SET

- Current results w/o anti-DID in **disagreement** with previous results
- Anti-DID reduces rates on SET
 - ~ 66 %

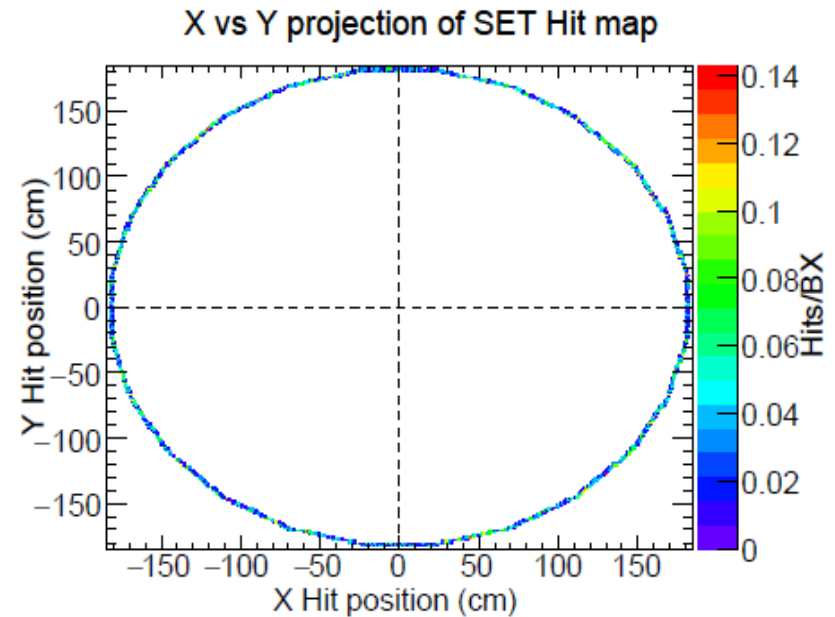

Layer	Units	DBD Prev	This Prod w/o antiDID	This Prod w/ anti-DID
1	Hits/BX	0.215 ± 0.690	47.8 ± 0.6	16.1 ± 0.3

**Note: current results
error is stat-only**


Very Preliminary Results $E_{\text{beam}} = 250 \text{ GeV}$: TPC

- Current results w/o anti-DID in agreement with previous results
- Anti-DID reduces rates on TPC
 - $\sim 20 \%$


Layer	Units	DBD Prev	This Prod w/o antiDID	This Prod w/ anti-DID
1	Hits/BX	216 ± 302	134 ± 1	108 ± 1

Note: current results error is stat-only

X vs Y projection of TPC Hit map

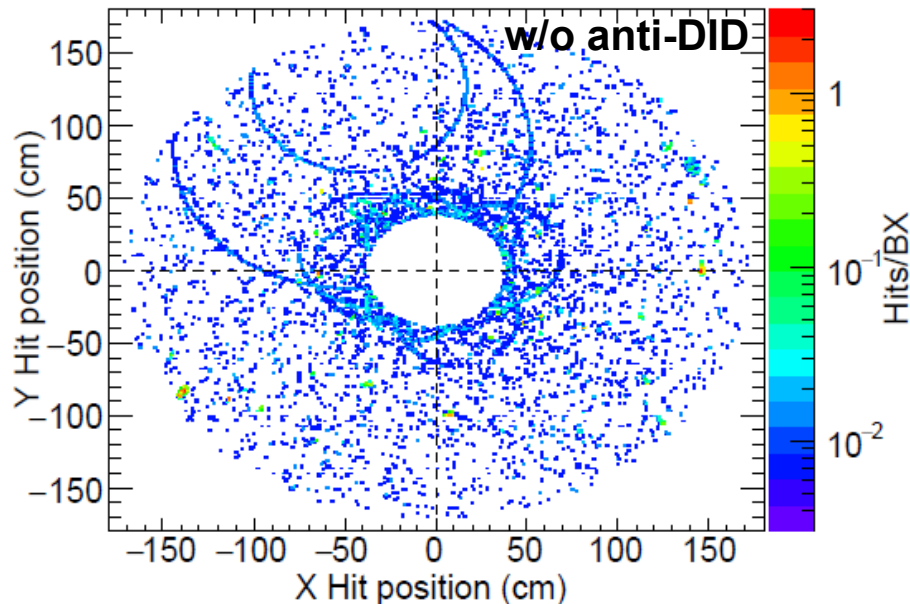

X vs Y projection of TPC Hit map

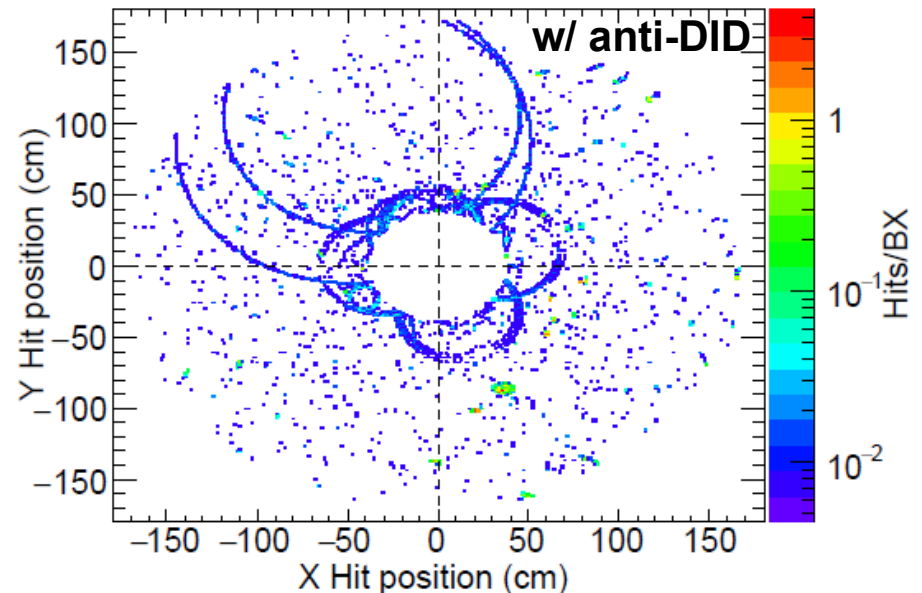

Summary and Outlook

- **All tools needed for Beamstrahlung background simulation already in place**
 - Guinea-Pig output reader
 - Anti-DID field map implementation
- **Pre-production (~10%) of Beamstrahlung background samples**
 - Solenoid w/ and w/o anti-DID
- **Preliminary results on background rates on Tracker subsystems**
 - Significant rate reduction w/ anti-DID, depending on the detector
 - For VXD: negligible effect w/ anti-DID
- **Outlook**
 - Finish background analysis tool
 - Simulate full samples of Beamstrahlung background
 - Fine tuning of anti-DID B-field: E_{beam} dependent global scale factor
 - Study different ILD detector models

Back up Slides

Previous Bkg rates Estimations for DBD

Reference: E. Avetisyan, LC-REP-2013-002

Sub-detector	Units	Layer	TDR_ws 500 GeV	B1b_ws 1000 GeV
VTX-DL	hits/cm ² /BX	1	6.320 ± 1.763	11.774 ± 0.992
		2	4.009 ± 1.176	7.479 ± 0.747
		3	0.250 ± 0.109	0.431 ± 0.128
		4	0.212 ± 0.094	0.360 ± 0.108
		5	0.048 ± 0.031	0.091 ± 0.044
		6	0.041 ± 0.026	0.082 ± 0.042
SIT	hits/cm ² /BX	1	0.0009 ± 0.0013	0.0016 ± 0.0016
		2	0.0002 ± 0.0003	0.0004 ± 0.0005
FTD	hits/cm ² /BX	1	0.072 ± 0.024	0.145 ± 0.024
		2	0.046 ± 0.017	0.102 ± 0.016
		3	0.025 ± 0.009	0.070 ± 0.009
		4	0.016 ± 0.005	0.046 ± 0.007
		5	0.011 ± 0.004	0.034 ± 0.005
		6	0.007 ± 0.004	0.024 ± 0.006
		7	0.006 ± 0.003	0.022 ± 0.006
SET	hits/BX	1	0.196 ± 0.924	0.588 ± 2.406
		2	0.239 ± 1.036	0.670 ± 2.616
TPC	hits/BX	-	216 ± 302	465 ± 356
ECAL	hits/BX	-	444 ± 118	1487 ± 166
HCAL	hits/BX	-	18049 ± 729	54507 ± 923