

Studies at SLAC's ESA of the transverse kicks due to collimator wakefields

Stephen Molloy, Mike Woods, Ray Arnold, SLAC

Nigel Watson, Mark Slater, Birmingham

Luis Fernandez, Carl Beard, Daresbury Lab

Jonny Smith, Lancaster

Justin Greenhalgh, George Ellwood, RAL

Adriana Bungau, Roger Barlow, Manchester

WakeFest 2007,


(also given at IRENG07, SLAC, 18th Sept, 2007)

Motivation for Measurement

- Collimators near ILC IR will cause wakefields
 - Amplify incoming jitter.
 - Dilute emittance.
 - Reduce luminosity.
- Previous studies have shown the complexity of analytical calculations, even in simple cases.
- Goal is to measure the transverse kick for a range of collimator specs, and compare with simulations.
 - Try to improve agreement to $\sim 10\%$.

Experimental Setup


Beam Energy	28.5 GeV
Charge	$\sim 1.5 \times 10^{10}$
Bunch Length	0.3 – 1 mm
x Size	~ 1 mm
y Size	~ 100 μm

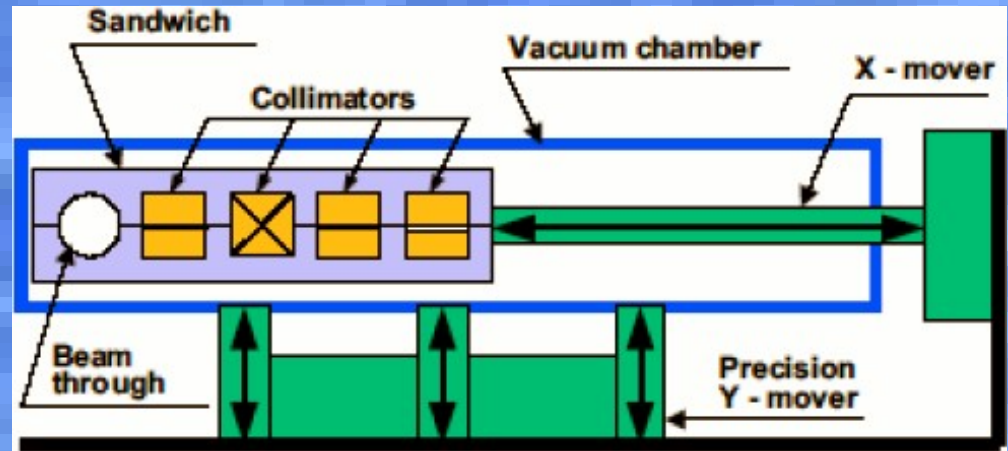


- Collimators placed in wakefield 'sandwich'.
 - Five slots, allowing four collimators plus extra slot for uninterrupted beam operation.
- Collimator to be tested inserted using X-mover.
- FFTB magnet controllers allow control in y, z, and dy/dz .
 - Readbacks give micron-level position information.



Experimental Setup

Beam Energy	28.5 GeV
Charge	$\sim 1.5e10$
Bunch Length	0.3 – 1 mm
x Size	~ 1 mm
y Size	~ 100 μm

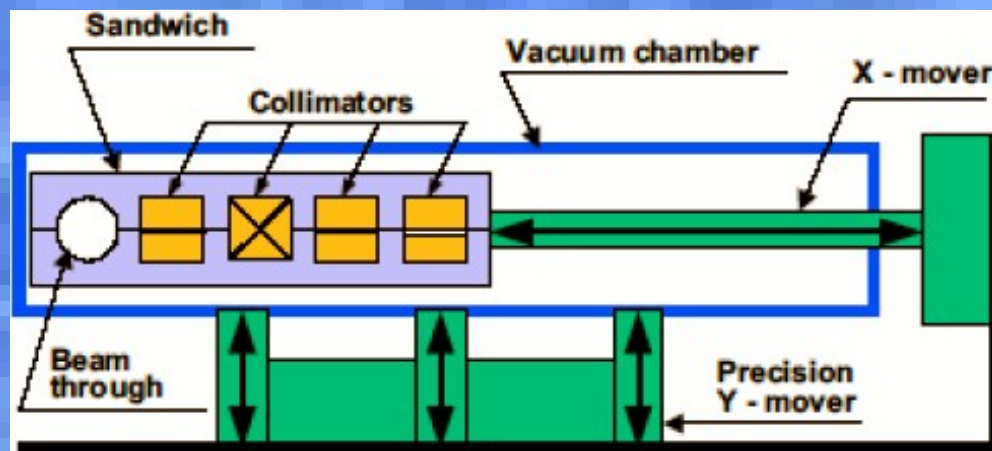


Concept of Experiment

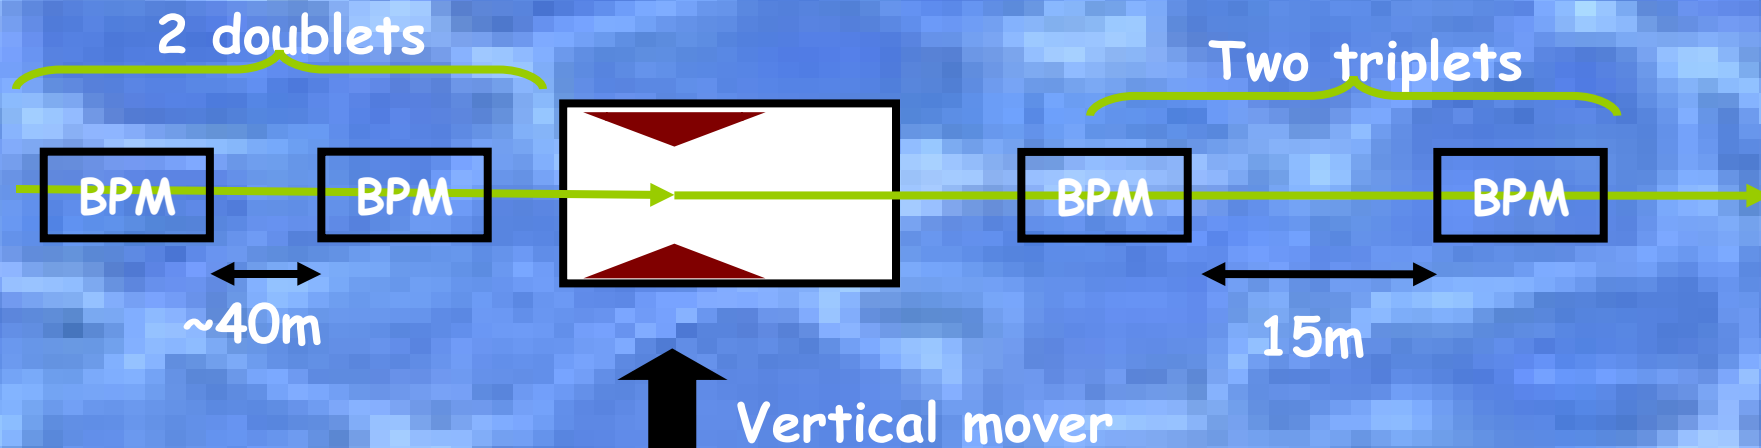



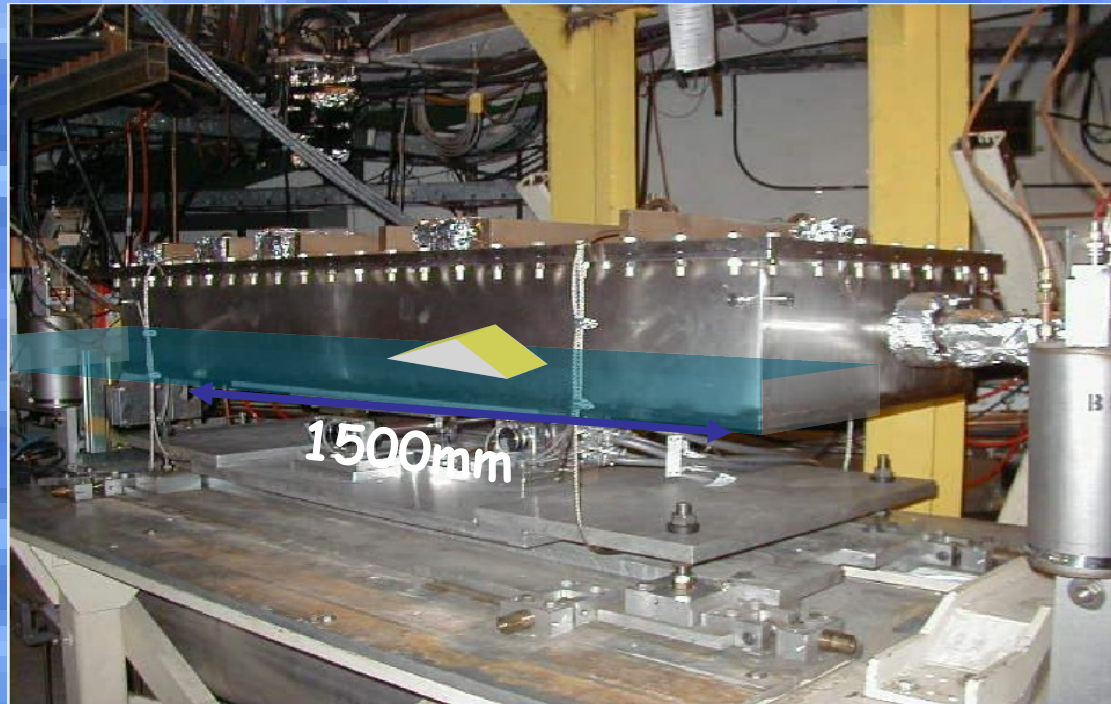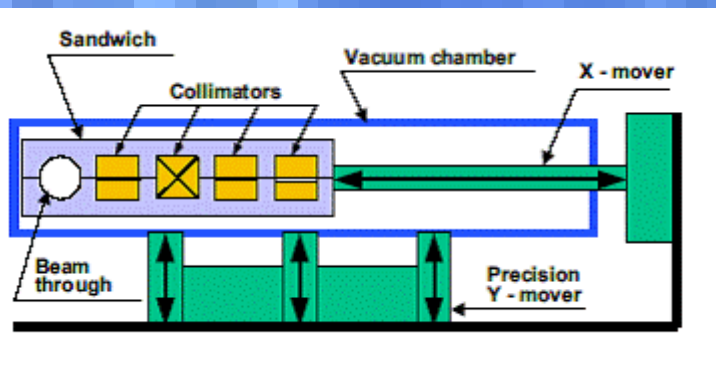







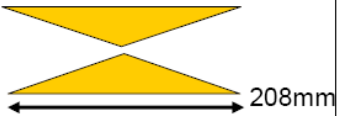



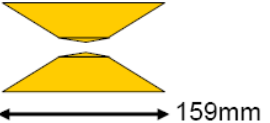



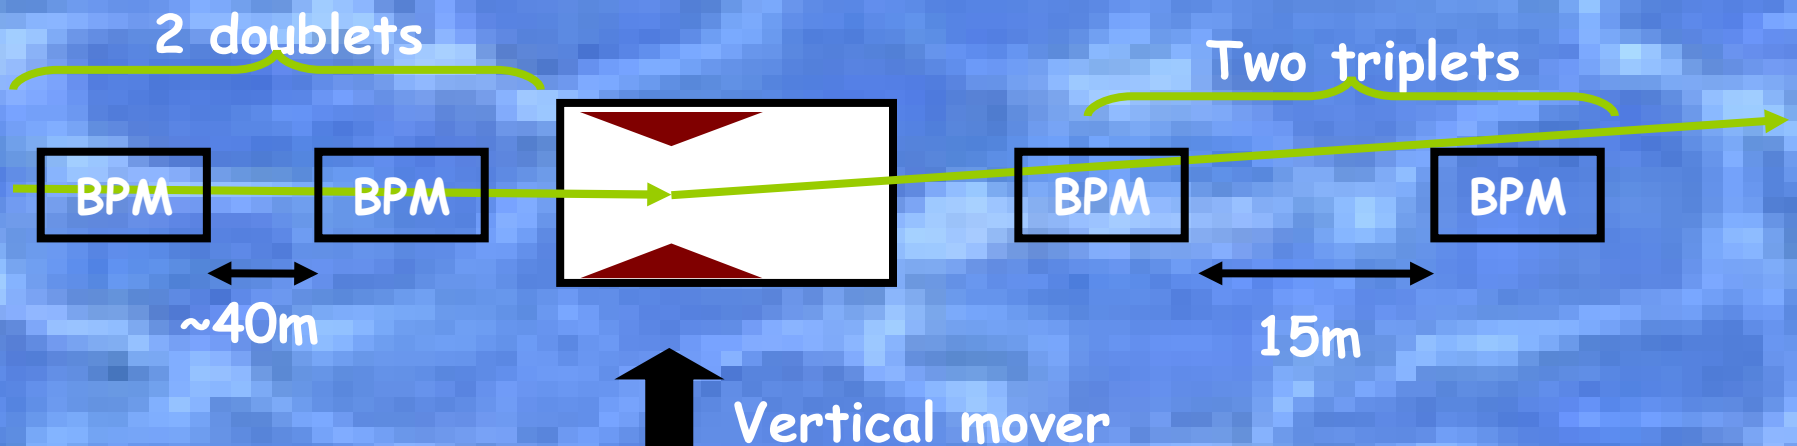Concept of Experiment




Collimators (Run 1)

Slot	Side view	Beam view	
1			$\alpha=335\text{mrad}$ $r=1.9\text{mm}$
2			$\alpha=335\text{mrad}$ $r=1.4\text{mm}$
3			$\alpha=335\text{mrad}$ $r=1.4\text{mm}$
4			$\alpha=\pi/2\text{rad}$ $r=3.8\text{mm}$









Slot	Side view	Beam view	
5			$\alpha=\pi/2\text{rad}$ $r=1.4\text{mm}$
6			$\alpha=168\text{mrad}$ $r=1.4\text{mm}$
7			$\alpha_1=\pi/2\text{ rad}$ $\alpha_2=168\text{mrad}$ $r_1=3.8\text{mm}$ $r_2=1.4\text{mm}$
8			$\alpha_1=298\text{mrad}$ $\alpha_2=168\text{mrad}$ $r_1=3.8\text{mm}$ $r_2=1.4\text{mm}$





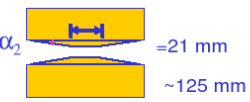

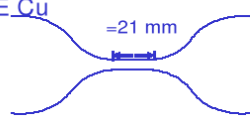

- Collimator #1 is identical to one from a previous test.
- Analytical prediction for #7 and #8 is identical, but 3D simulation hints at differences.
- #3 will have a much larger resistive component than the others.
- This set explores a wide range of taper angles.

Collimators (Run 1)

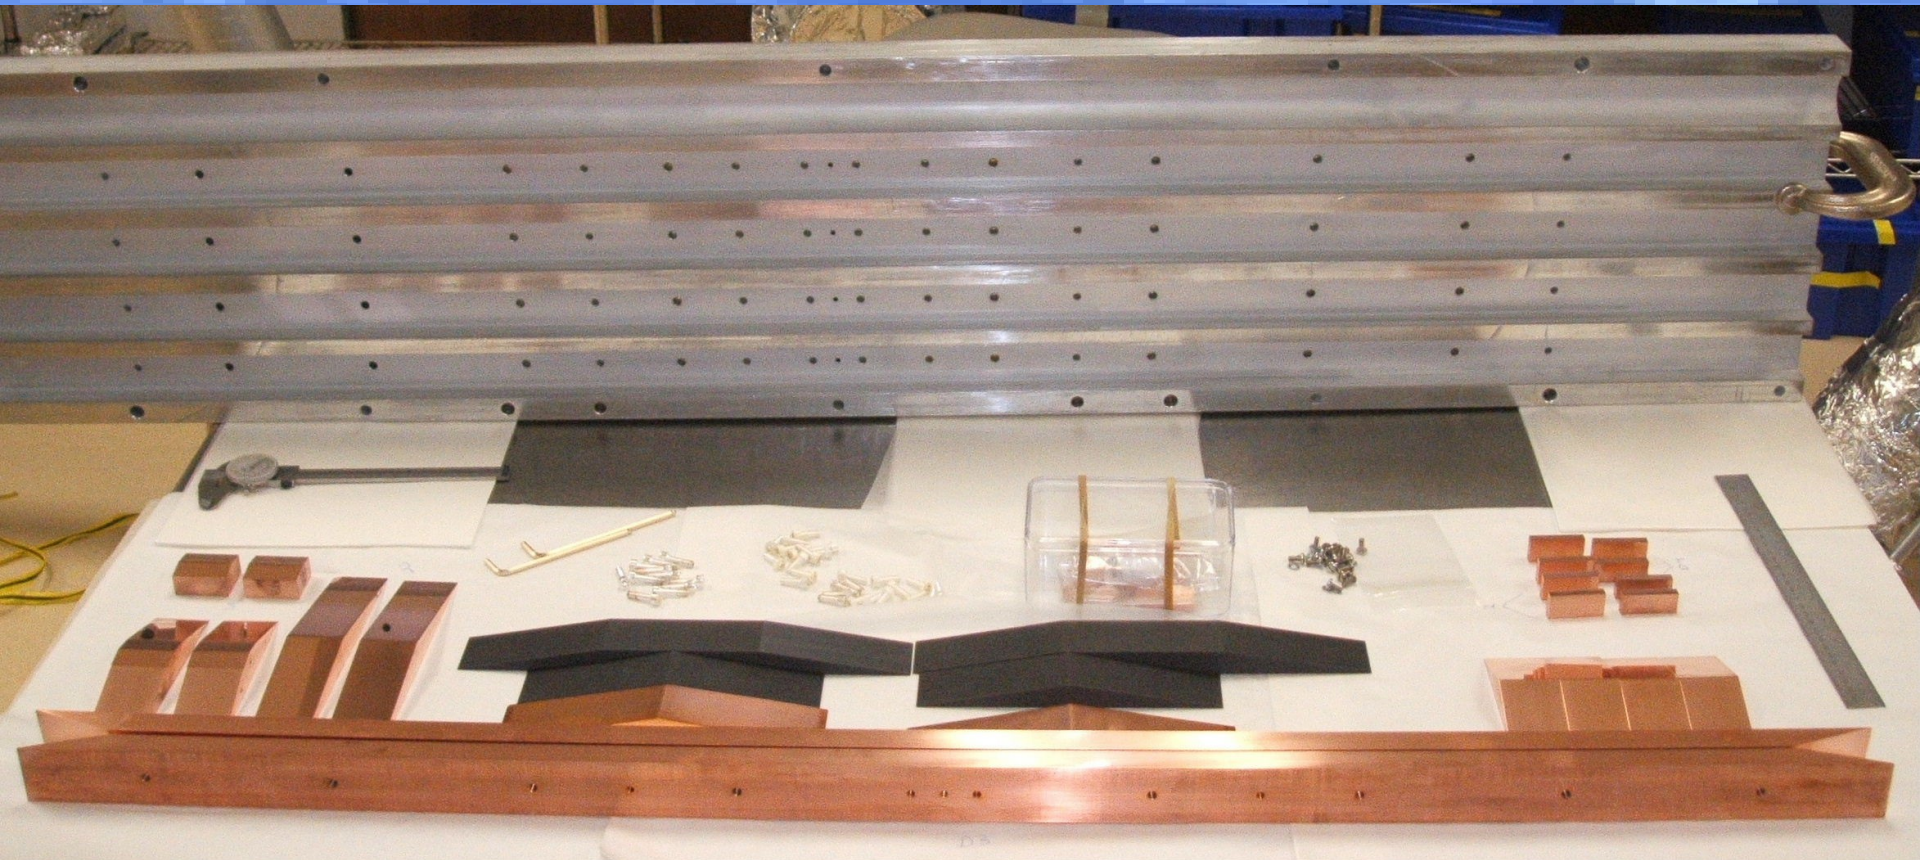

Collimators (Run 2)

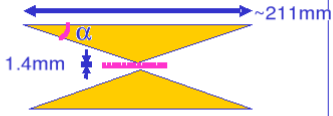Collim.#	Side view	Beam view	Revised 27-Nov-2006
6			$\alpha=166\text{mrad}$ $r=1.4\text{mm}$ (1/2 gap)
10			$\alpha=166\text{mrad}$ $r=1.4\text{mm}$
11			$\alpha=166\text{mrad}$ $r=1.4\text{mm}$
12			$\alpha=166\text{mrad}$ $r=1.4\text{mm}$

Collim.#	Side view	Beam view	Revised 27-Nov-2006
13	OFE Cu 		$\alpha_1=\pi/2 \text{ rad}$ $\alpha_2=166\text{mrad}$ $r_1=4.0\text{mm}$ $r_2=1.4\text{mm}$
14	Ti6Al4V 		$\alpha_1=\pi/2 \text{ rad}$ $\alpha_2=166\text{mrad}$ $r_1=4.0\text{mm}$ $r_2=1.4\text{mm}$
15			$\alpha_1=\pi/2 \text{ rad}$ $\alpha_2=50\text{mrad}$ $r_1=4.0\text{mm}$ $r_2=1.4\text{mm}$
16	OFE Cu 		non-linear taper $r=1.4\text{mm}$

- Collimator #6 identical to #6 from Run 1.
- This set investigates the effect of material and surface finish on the kick.
- #16 tested a smooth impedance change.

Collimators (Run 2)

Cu, no flat top

Roughened surface

Ti polished

Polished Cu

50mrad taper
(pre-polishing)

All fabrication/design aspects:
George Ellwood, Joe O'Dell, Justin Greenhalgh (RAL)



Collimators (Run 2)



Collimator 16

Nigel Watson / Birmingham

Data Analysis

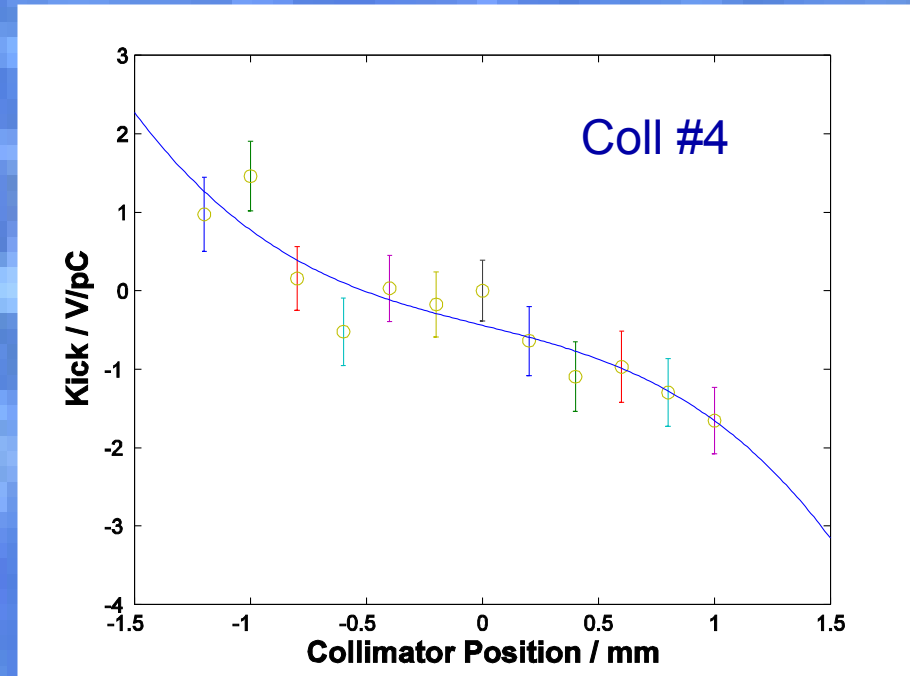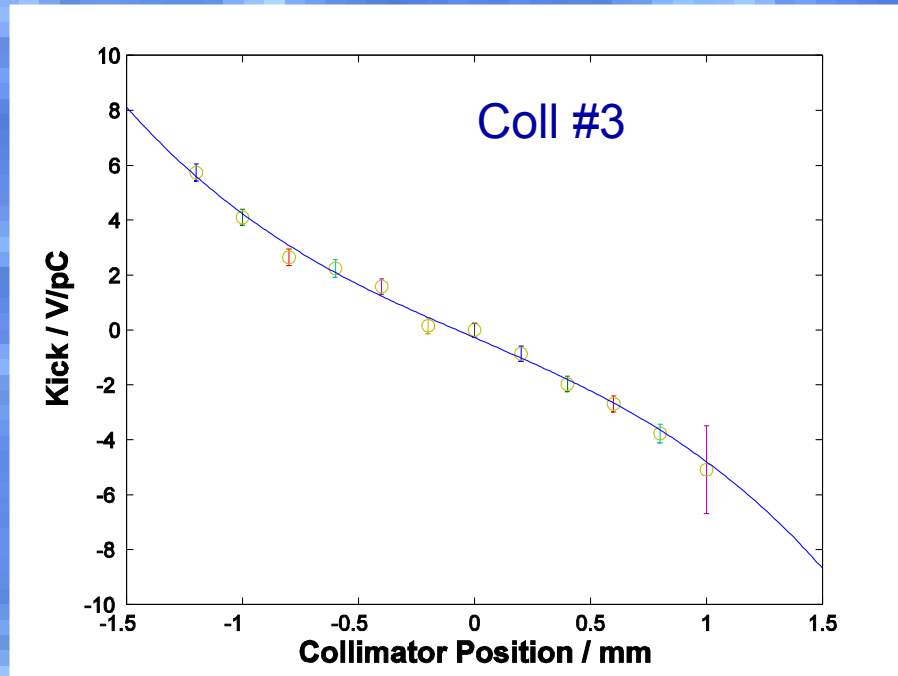

- Kick should be odd function.
- Fit data to 3rd-order polynomial, with quadratic term set to zero.
- Kick factor is the linear term.

Analytical Prediction

Geometric wake

$$\alpha = \theta_T b_1 / \sigma_Z$$

For tapered collimators, the prediction depends on the “regime”.

- $\alpha \ll 1$ – *inductive regime*
- $\alpha \gg 1$ – *diffractive regime*

Typical values in our experiment

$$\theta_T = 324, 289, 166, 50 \text{ mrad}$$

$$b_1 = 4.0, 1.4 \text{ mm}$$

$$\sigma_Z = 1.0 - 0.3 \text{ mm}$$

$\alpha = 1 - 30$ – Collimators are in the intermediate or diffractive regimes.

$$\kappa = \frac{1}{4\pi\epsilon_0 b_1^2}$$

$$\kappa = 1.35 \frac{1}{4\pi\epsilon_0} \frac{\sqrt{\alpha}}{b_1^2}$$

Resistive wake








Flat collimator

$$\kappa = F_G \frac{\sqrt{2} r_e m_e c^2}{\pi e^2} \frac{L}{r^3} \sqrt{\frac{1}{Z_0 \sigma \sigma_z}},$$


Tapered collimator

$$\kappa = F_G \frac{\sqrt{2} r_e m_e c^2}{\pi e^2} \frac{1}{r_1^2 \tan \alpha} \sqrt{\frac{1}{Z_0 \sigma \sigma_z}}$$



EM Simulations with GdfidL

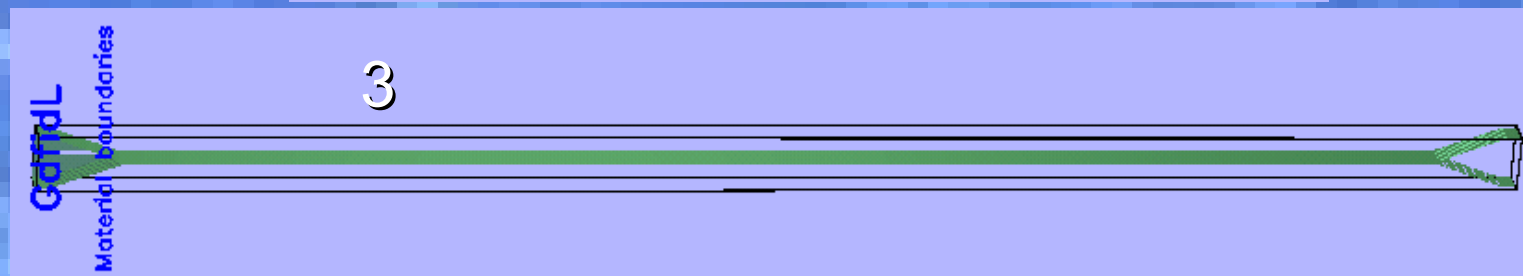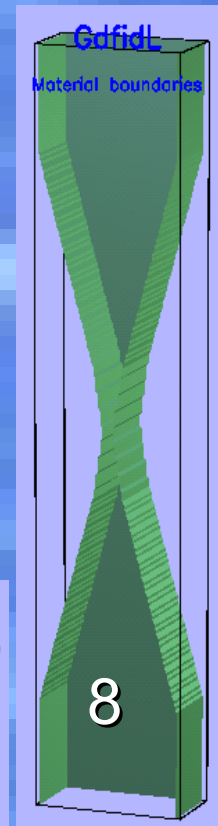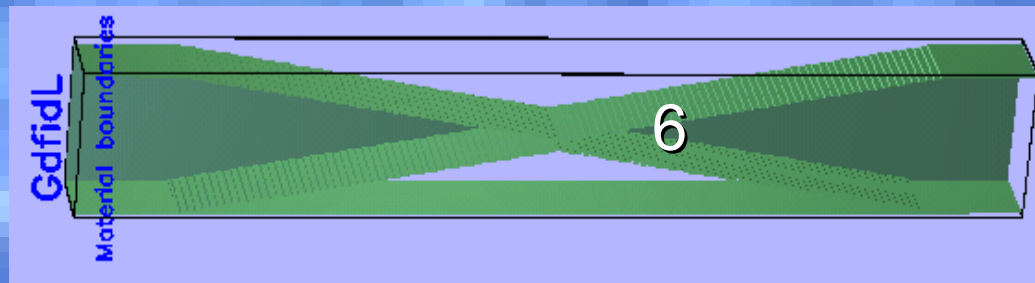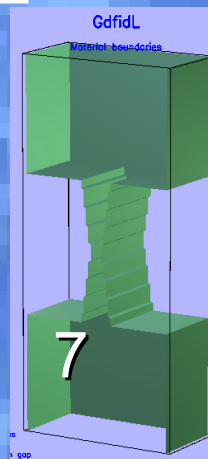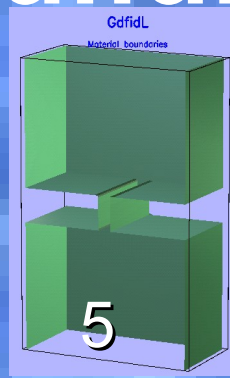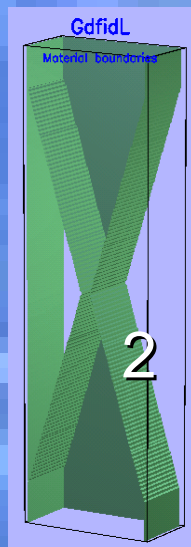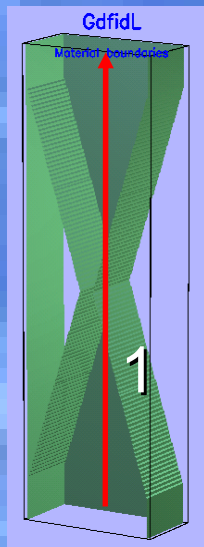

Misalignment of spoiler jaws

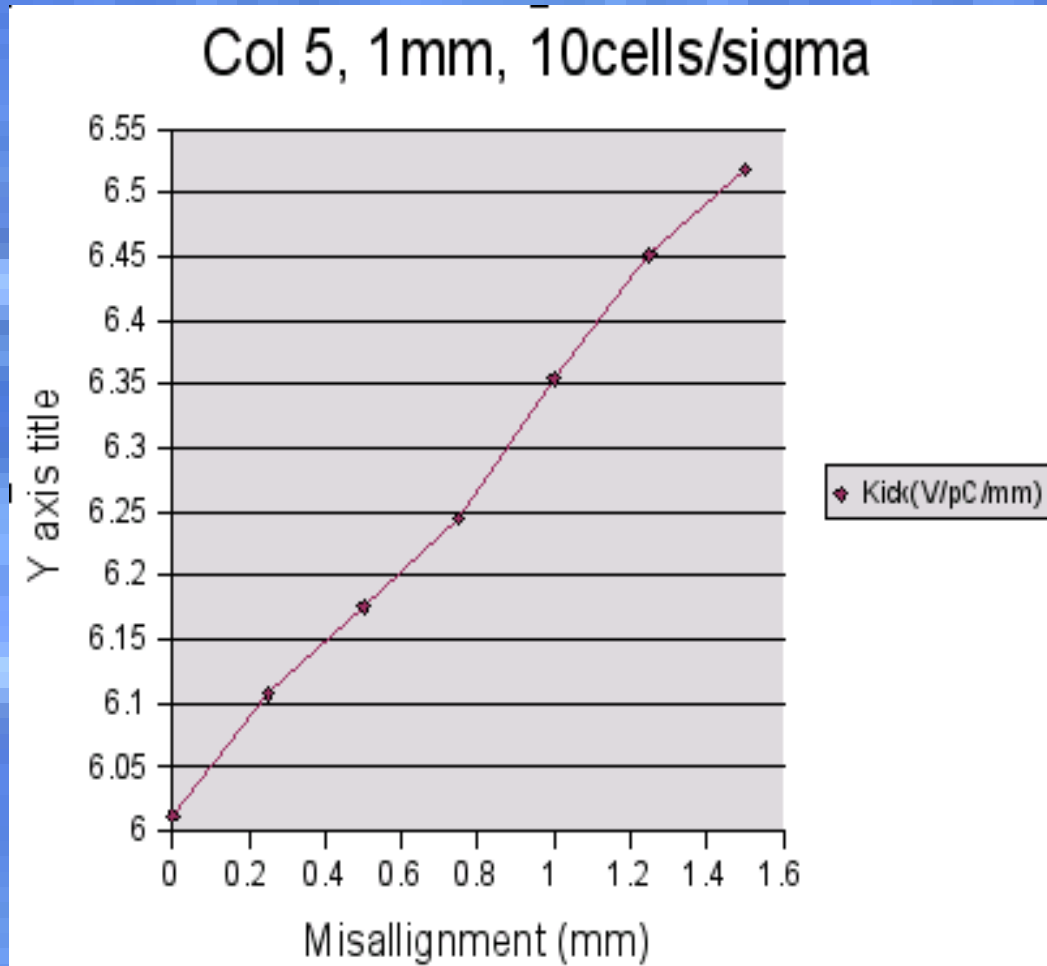

Problem...

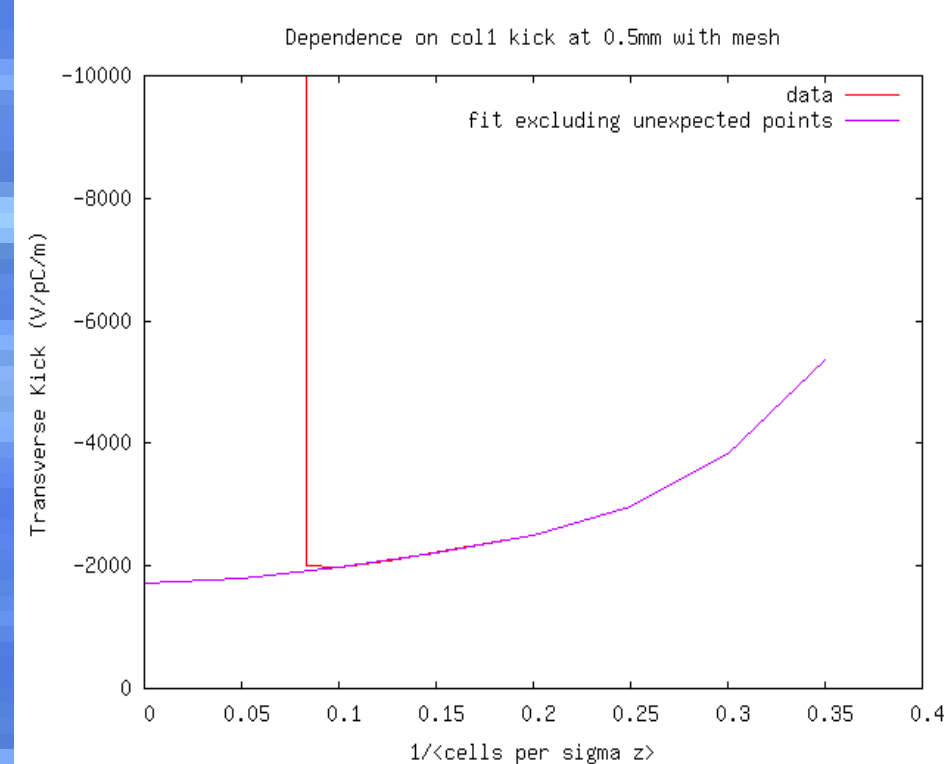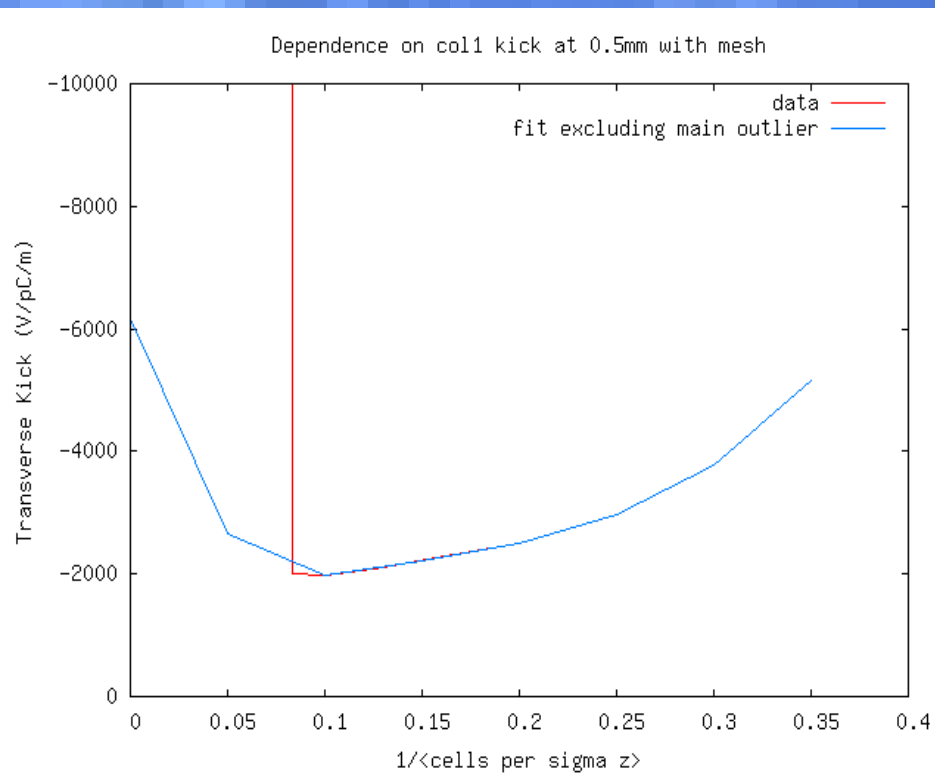

Results

Predictions made for 0.5 mm bunch length.

3D modelling does not include resistive effects.

Coll.	Measured Kick Factor / V/pC/mm (Linear Fit)	Measured Kick Factor / V/pC/mm (Linear & Cubic Fit)	Analytic Prediction Kick Factor V/pC/mm	3-D Modeling Prediction Kick Factor V/pC/mm
1	1.4 ± 0.1 (1.0)	1.2 ± 0.3 (1.0)	2.27	1.63 ± 0.37
2	1.4 ± 0.1 (1.3)	1.2 ± 0.3 (1.4)	4.63	2.88 ± 0.84
3	4.4 ± 0.1 (1.5)	3.7 ± 0.3 (0.8)	5.25	5.81 ± 0.94
4	0.9 ± 0.2 (0.8)	0.5 ± 0.4 (0.8)	0.56	0.8
5	3.7 ± 0.1 (7.9)	4.9 ± 0.2 (2.6)	4.59	6.8
6	0.9 ± 0.1 (0.9)	0.9 ± 0.3 (1.0)	4.65	2.12 ± 1.14
7	1.7 ± 0.1 (0.7)	2.2 ± 0.3 (0.5)	4.59	2.87 ± 0.53
8	1.7 ± 0.3 (2.0)	1.7 ± 0.3 (2.2)	4.59	2.39 ± 0.89
13		4.1 ± 0.4 (0.8)		3.57 ± 0.98
14		2.6 ± 0.4 (1.0)		3.57 ± 0.98
15		2.0 ± 0.3 (1.8)		2.51 ± 1.16
16		1.3 ± 0.3 (1.0)		2.35 ± 1.50

- Good agreement with PT's previous measurement of #1.
- Analysis not yet complete on all collimators.
- Some anomalies,
 - Why do #1 and #2 have the same measured kick factor?
 - Why is the measurement for #14 lower than #13?

Further Work

- Determine maximum kick allowable in the different ILC parameter sets.
 - Include collimator wake kicks in BDS tracking studies.
 - Enhance analytical prediction to allow fast turnaround between new collimator suggestion and tracking studies.
- Determine reasons for disagreement between experiment and simulation.
 - Necessary to add resistive wake to simulations?