


Near-term plans for e- source



- Just jumped from e+ to e-; experience of s2e tracking for e+ will be helpful for e-tracking.
- Near-term plans:
 - Design TW buncher
 - Dogleg replacement with a chicane
 - S2E tracking including energy compression and finally launch e- into 6-D DR acceptances
 - Magnet error analysis
 - ...

Buncher schemes

- Current: two SW 5-cell buncher
- Roger M. suggested to design a TW buncher like in SLC and NLC but with L-band;

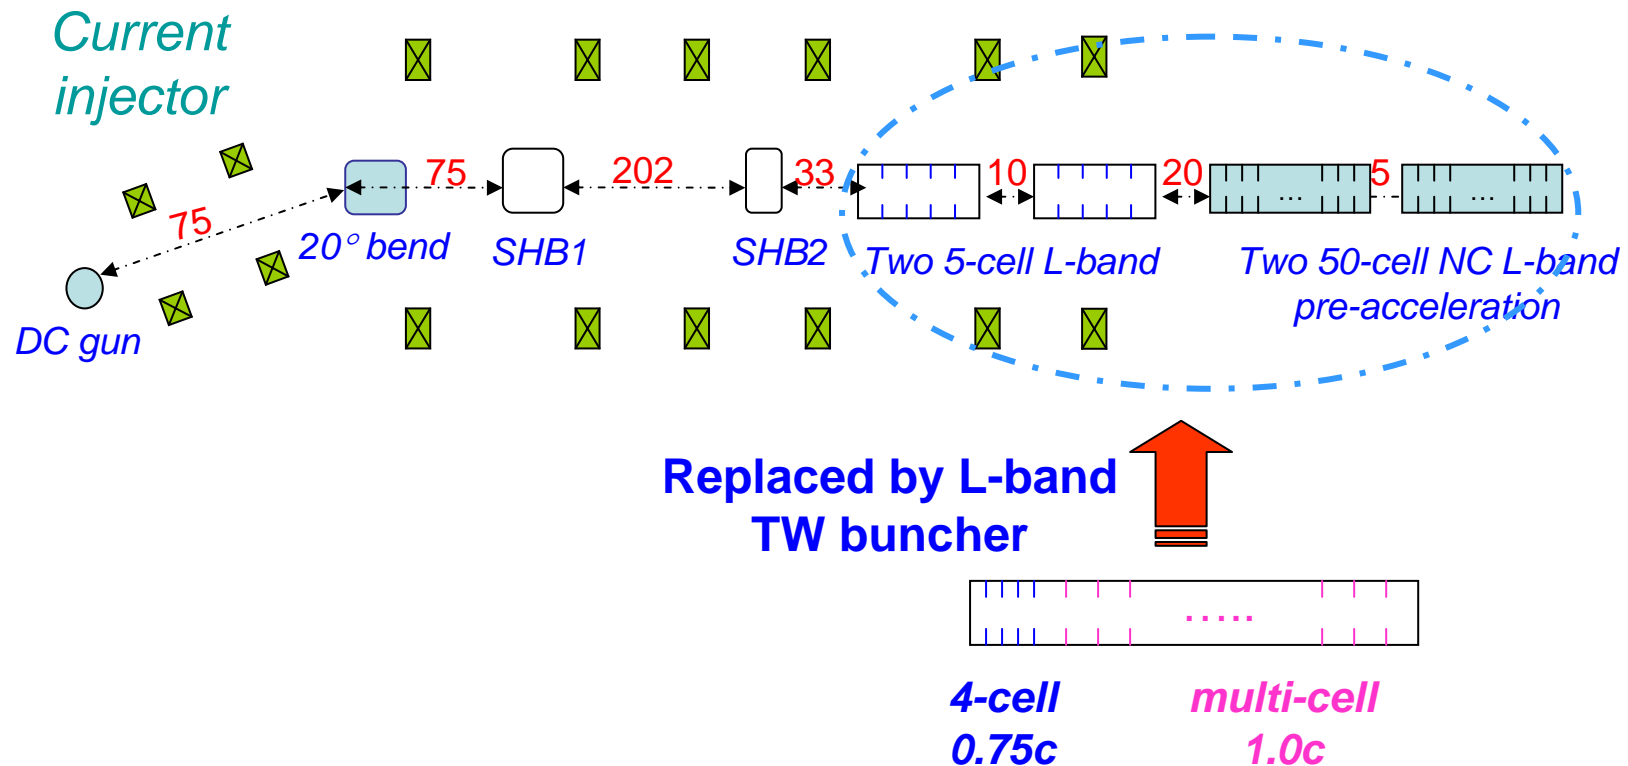

Very initial results @ buncher exit

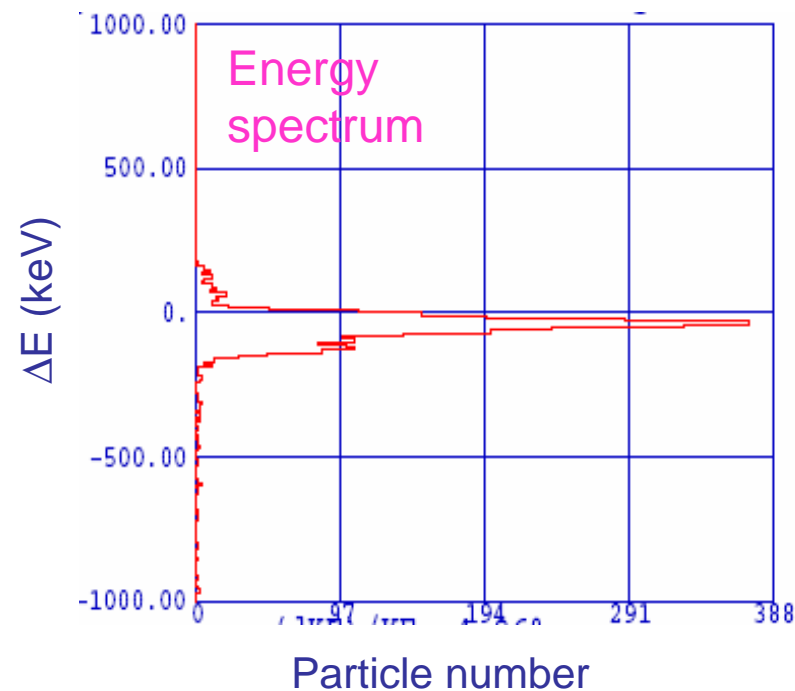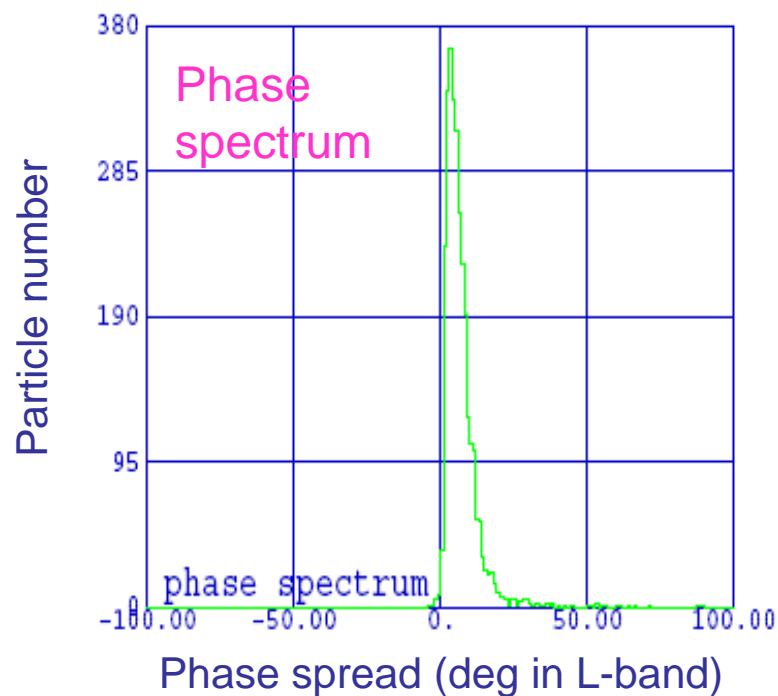

- Very initial, but very encouraging; I really like this scheme. More complete results and optimizations are expected in next meeting.