

Elliptical SRF Cavities

Mike Foley



OUTLINE



- **PREVIEW OF PRESENTATION**
 - Brief review of established fabrication method for elliptical SRF cavities.
 - Alternative fabrication methods with the goal of reducing costs: opportunities for R & D.
 - Alternative cavity cell shapes to increase accelerating gradient: opportunities for R & D.
 - Current cavity fabrication efforts at FNAL and US vendor development.
 - The goal is to show that to effectively exploit these and other opportunities for R & D and facilitate US industrial involvement, FNAL needs an on site EB welding machine and supporting infrastructure.
 - Costs

Established Fabrication Method



- **Established Fabrication Method for Multi-cell SRF Cavities**
 - Disks are cut from high purity niobium sheet and scanned for pits, scratches and inclusions of foreign material. Disks failing scan are rejected.
 - Half cells are deep drawn from disks: extra material is left at the iris and equator of each half cell to allow for weld shrinkage -- additional length retained at the equators for tuning.
 - Half cells are EB welded at the iris to form dumbbells: if necessary stiffening rings are EB welded to prevent Lorentz force detuning -- dumbbells are measured for frequency and equators trimmed accordingly.

Established Fabrication Method



- End tubes, FPCs and HOMs are formed by vendor preferred method (rolled and seam welded, back extruded, machined, etc.) -- flanges and other components are machined.
- End assemblies are EB welded, measured for frequency and end half cells are trimmed accordingly.
- Dumbbells are EB welded at the equators to form the cell structure: end assemblies are EB welded to the cell structure to complete the cavity.
- NOTE: Each EB welding operation above requires parts to be degreased and BCP acid etched as weld preparation. There are ~ 50-70 EB welds per typical nine-cell SRF cavity.

Established Fabrication Method



- **Why EB welding?**

EB welds produce localized heat affected zone resulting in minimum distortion (a necessity with the tight tolerances on cell profile).


EB welds are fusion welds -- no secondary medium required.

Depth of penetration is easy to control.

Repeatability is excellent.

EB welds are done in vacuum, thus reducing the potential for contamination.


Established Fabrication Method

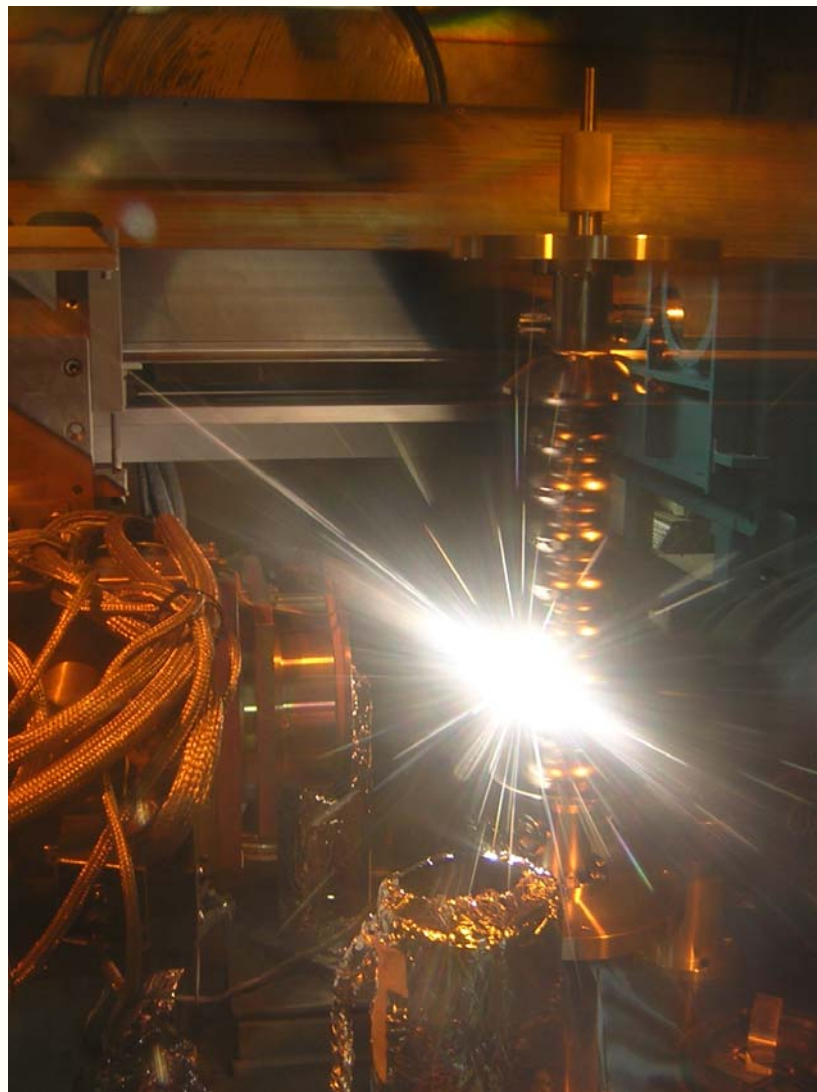

Established Fabrication Method



- **Estimated ILC cavity fabrication costs in mass production mode: maximum gains in cost reduction can be achieved by reducing material and/or machining costs.**

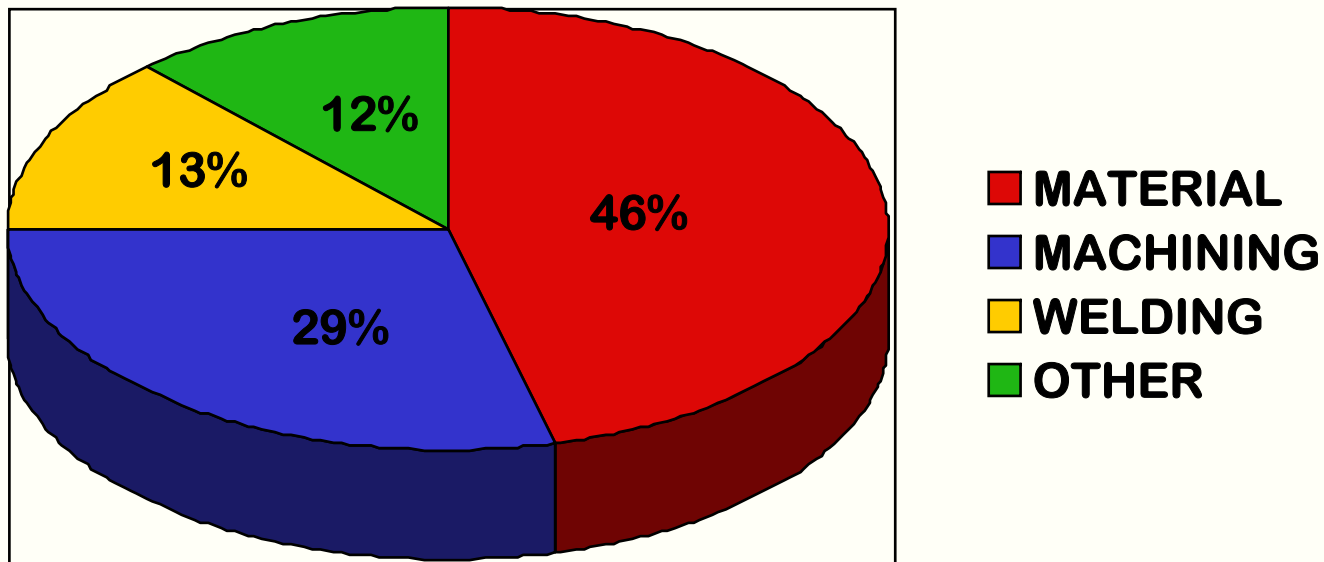

Alternative Cavity Fabrication Methods



- **Motivation is primarily based on potential cost savings -- secondary benefit may be improved performance.**
 - **Methods to reduce material costs (e.g., niobium film coating on substrate).**
 - **Methods to reduce machining costs (e.g., hydroforming or spinning of central cell structure).**
 - **Methods to further automate fabrication steps (e.g., EB welding machine configuration, innovative welding fixture design).**
 - **Methods to reduce welding costs (e.g., Tig welding non RF critical components).**

Alternative Cavity Fabrication Methods

Hydro-forming (Singer-DESY, KEK)



Spinning (Palmieri-INFN)



Alternative Cavity Fabrication Methods



- **Hydroforming or spinning cell structure**
- **Potential advantages**
 - Eliminate welds in high field regions of the cavity.
 - Eliminate machining of dumbbell equators for tuning.
 - If formed from niobium clad copper tubes may: (1) Significantly reduce material (niobium) costs, (2) Improve heat transfer to Helium thus enhancing stability against quench, and (3) Allow thicker cell walls thus eliminating need for stiffening rings.
- **Potential disadvantages**
 - Seamless niobium tube production possessing uniform formability properties and sufficient length for 9-cell cavities requires further R & D.
 - Niobium clad copper tubes may delaminate from stresses due to thermal cycling.
 - Single pass EB welds required to join 9-cell structure to end assemblies will be difficult to execute.
 - Hydroforming strains result in orange peel effect near irises.

Alternative Cavity Fabrication Methods



- **Form end assemblies from brazed copper components followed by niobium film coating.**
- **Potential advantages**
 - Reduce material (niobium) costs.
 - Eliminate some EB welding costs.
- **Potential disadvantages**
 - Complex internal end assembly geometry makes uniform niobium film deposition problematic.
 - Possibility of copper migration into critical weld joint.

Alternative Cavity Cell Shapes



- **Max Eacc = Hcrit/(Hpeak/Eacc)**
 - When Hpeak on the RF surface of a cavity cell reaches Hcrit breakdown of superconductivity occurs.
 - Hcrit is a property of the material (niobium).
 - Hpeak/Eacc is determined by the geometry of the cell profile.
 - To increase Max Eacc: (1) Develop alternate materials with higher Hcrit, or (2) Reduce Hpeak/Eacc by changing the geometry of the cell profile (e.g., reentrant cavity or low-loss cavity).

SRF Cavity Fabrication at FNAL



- **Completed, in progress and planned:**
 - 3.9 GHz 3rd harmonic cavities**
 - Cryomodule with four cavities promised to DESY as part of 3.9 GHz collaboration.
 - Four cavities completed (two at TJNL and two at FNAL)
 - Apparent problem with HOM design: cavity No. 4 with slightly modified HOM scheduled for vertical testing.
 - Four additional cavities with new HOM design (single post Formteil) are in progress (two at TJNL and two at FNAL).
 - Large grain one-cell cavity in progress at FNAL.
 - Single grain one-cell cavity planned at TJNL.
 - Three one-cell cavities completed at FNAL and three one-cell cavities are in progress at Roark.

SRF Cavity Fabrication at FNAL



- Single-cell cavities are useful for R & D studies on cavity processing methods (EP, HPR, tumbling, etc.), as well as helping industry (Roark) perfect their fabrication and welding techniques.

3.9 GHz deflecting mode cavities (Photoinjector upgrade and ILC Crab cavities)

- Various single-cell and three-cell cavities have been fabricated, plus one 9-cell and one 13-cell .
- New design is in progress at low level of priority.

1.3 GHz Tesla cavities

- Four ACCEL cavities (asymmetric end tubes) received.
- Four AES cavities (asymmetric end tubes) in final assembly stage (two have been completed and shipped to TJNL for processing).

SRF Cavity Fabrication at FNAL



- Two large grain cavities (symmetric end tubes) fabricated at TJNL are due in February.
- Two fine grain cavities (asymmetric end tubes) in progress at TJNL.
- Nine ACCEL cavities (symmetric end tubes) on order.
- Six AES cavities (symmetric end tubes) on order.
- FY2007 plan is to order ~ 24 cavities if funding permits.

Industrialization: US Vendor Development



- **The objective is to involve US industry more and utilize their expertise.**
 - **AES: experienced, but need to prove capability with ILC cavities -- awaiting test results of first four cavities at TJNL.**
 - **ROARK: appear capable, but lacking experience. Currently fabricating three 3.9 GHz 3rd harmonic single-cell cavities as Phase 1 of a potential three phase effort. Phase 2 would entail building one single-cell 1.3 GHz ILC cavity. Phase 3 would be**
 - **NIOWAVE/ROARK collaboration (complementary capabilities). Fabricate two 9-cell 1.3 GHz ILC cavities.**

Need for EB Welding Machine at FNAL



- **Need for EB welding machine and supporting infrastructure at Fermilab: Why?**
 - **Remove dependence on Sciaky. Sciaky machines in use for contract welding are always for sale. In FY2005 the machine we were using for 3rd harmonic cavity fabrication was sold, causing over an eight month delay in our schedule. Transportation of parts to Sciaky and their machine shop environment increases the potential for damage and/or contamination. Scheduling welding dates is an issue, with competition from ANL, MSU and others.**
 - **It will facilitate on site investigation of alternative cavity fabrication methods so as to reduce cavity cost.**
 - **It can be used for on site investigation of experimental cavity cell shapes with the goal of improving accelerating gradient.**

Need for EB Welding Machine at FNAL



- **Need for EB welding machine and supporting infrastructure at Fermilab: Why?**
 - It can be utilized as an integral part of a training facility to transfer welding and cavity fabrication methodology to collaborators and potential US vendors.
 - Supporting infrastructure will include eddy current scanners (2), RF measurement area, clean room, ultrasonic cleaning tanks, UP water system, and pre-weld BCP etching facilities to prepare parts for welding.

Required Funding



Infrastructure	M&S	SWF	Total with Indirect
Cavity Fabrication Infrastructure	\$ 3,000	\$ 675	\$ 4,380
Cavity Processing Facilities	\$ 11,100	\$ 4,590	\$ 18,945
Vertical Test Stand (VTS 2 & 3)	\$ 2,625	\$ 1,845	\$ 5,475
Horizontal Test Stand (HTS 2)	\$ 1,220	\$ 1,057	\$ 2,805
Cavity/Cryomodule Assembly Facilities (CAF_MP9 & ICB)	\$ 690	\$ 270	\$ 1,158
NML Facility (ILCTA_NML)	\$ 18,270	\$ 23,220	\$ 51,700
Cryogenics for Test Facilities	\$ 10,690	\$ 950	\$ 13,692
Cryomodule Test Stand	\$ 5,400	\$ 2,970	\$ 10,180
Material R&D	\$ 870	\$ 722	\$ 1,960
Illinois Accelerator Research Center	\$ 20,000	\$ 4,050	\$ 28,605
Grand Total (\$k)	\$ 73,865	\$ 40,349	\$ 138,900

Conclusions



- **Establishment of cavity fabrication infrastructure will:**
 - (1) Provide FNAL with limited in-house capability to develop and refine cavity fabrication techniques,**
 - (2) Increase throughput for current and future cavity fabrication programs,**
 - (3) Significantly increase FNAL's capability to transfer SRF fabrication technology to US industry, and**
 - (4) Allow FNAL to become a more effective participant in SRF R & D.**