GLD-PFA Study

Contents

1. Introduction
2. Particle Flow Algorithm
3. Detector Optimization Study
4. Summary

ILC Software and Tools Workshop @ LAL - Orsay

May. 2nd-4th, 2007

Tamaki Yoshioka

ICEPP, Univ. of Tokyo

On behalf of the GLD colleagues

Introduction

- Most of the important physics processes to be studied in the ILC experiment have multi-jets in the final state.
  → **Jet energy resolution is the key in the ILC physics.**

- The best energy resolution is obtained by reconstructing momenta of individual particles avoiding double counting among Trackers and Calorimeters.
  - Charged particles (~60%) measured by Tracker.
  - Photons (~30%) by electromagnetic CAL (ECAL).
  - Neutral hadrons (~10%) by ECAL + hadron CAL (HCAL).

  → ***Particle Flow Algorithm (PFA)***

- In this talk, general scheme and performance of the GLD-PFA, using the GEANT4-based full simulator (Jupiter), will be presented.

GLD Detector Concept

- To get good energy resolution by PFA, separation of particles (reducing the density of charged and neutral particles at CAL surface) is important.

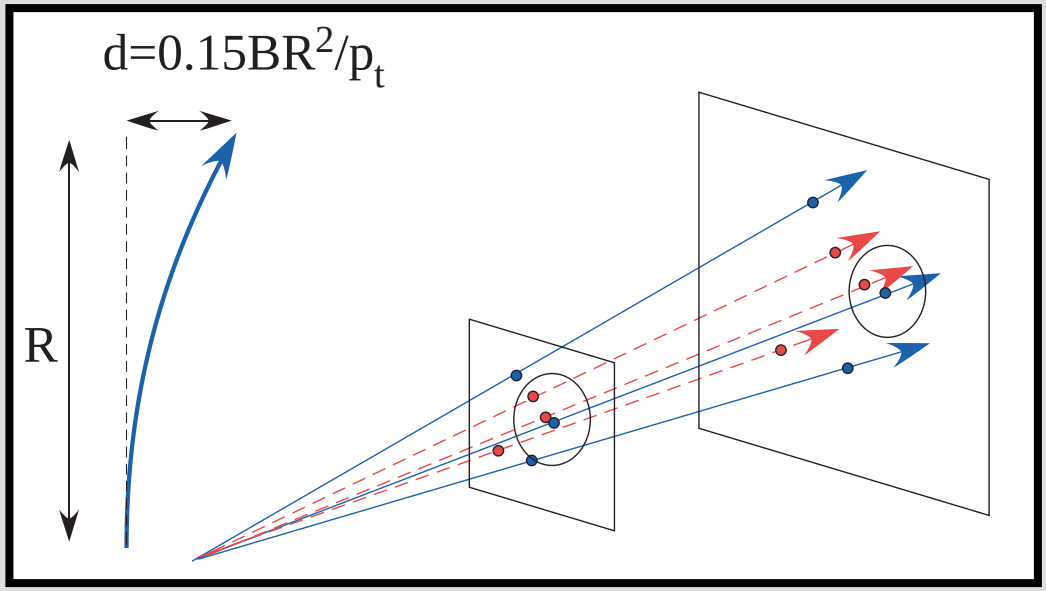

Often quoted "Figure of Merit"

$$\frac{BR^2}{\sqrt{\sigma^2 + R_M{}^2}}$$

B : Magnetic field
R : CAL inner radius
σ : CAL granularity
R_M : Effective Moliere length

- ***GLD concept***
  1. Large inner radius of ECAL to optimize the PFA.
  2. Large tracker for excellent dp_t/p_t^2 and pattern recognition.
  3. Moderate B field (~3T).

Geometry in Jupiter

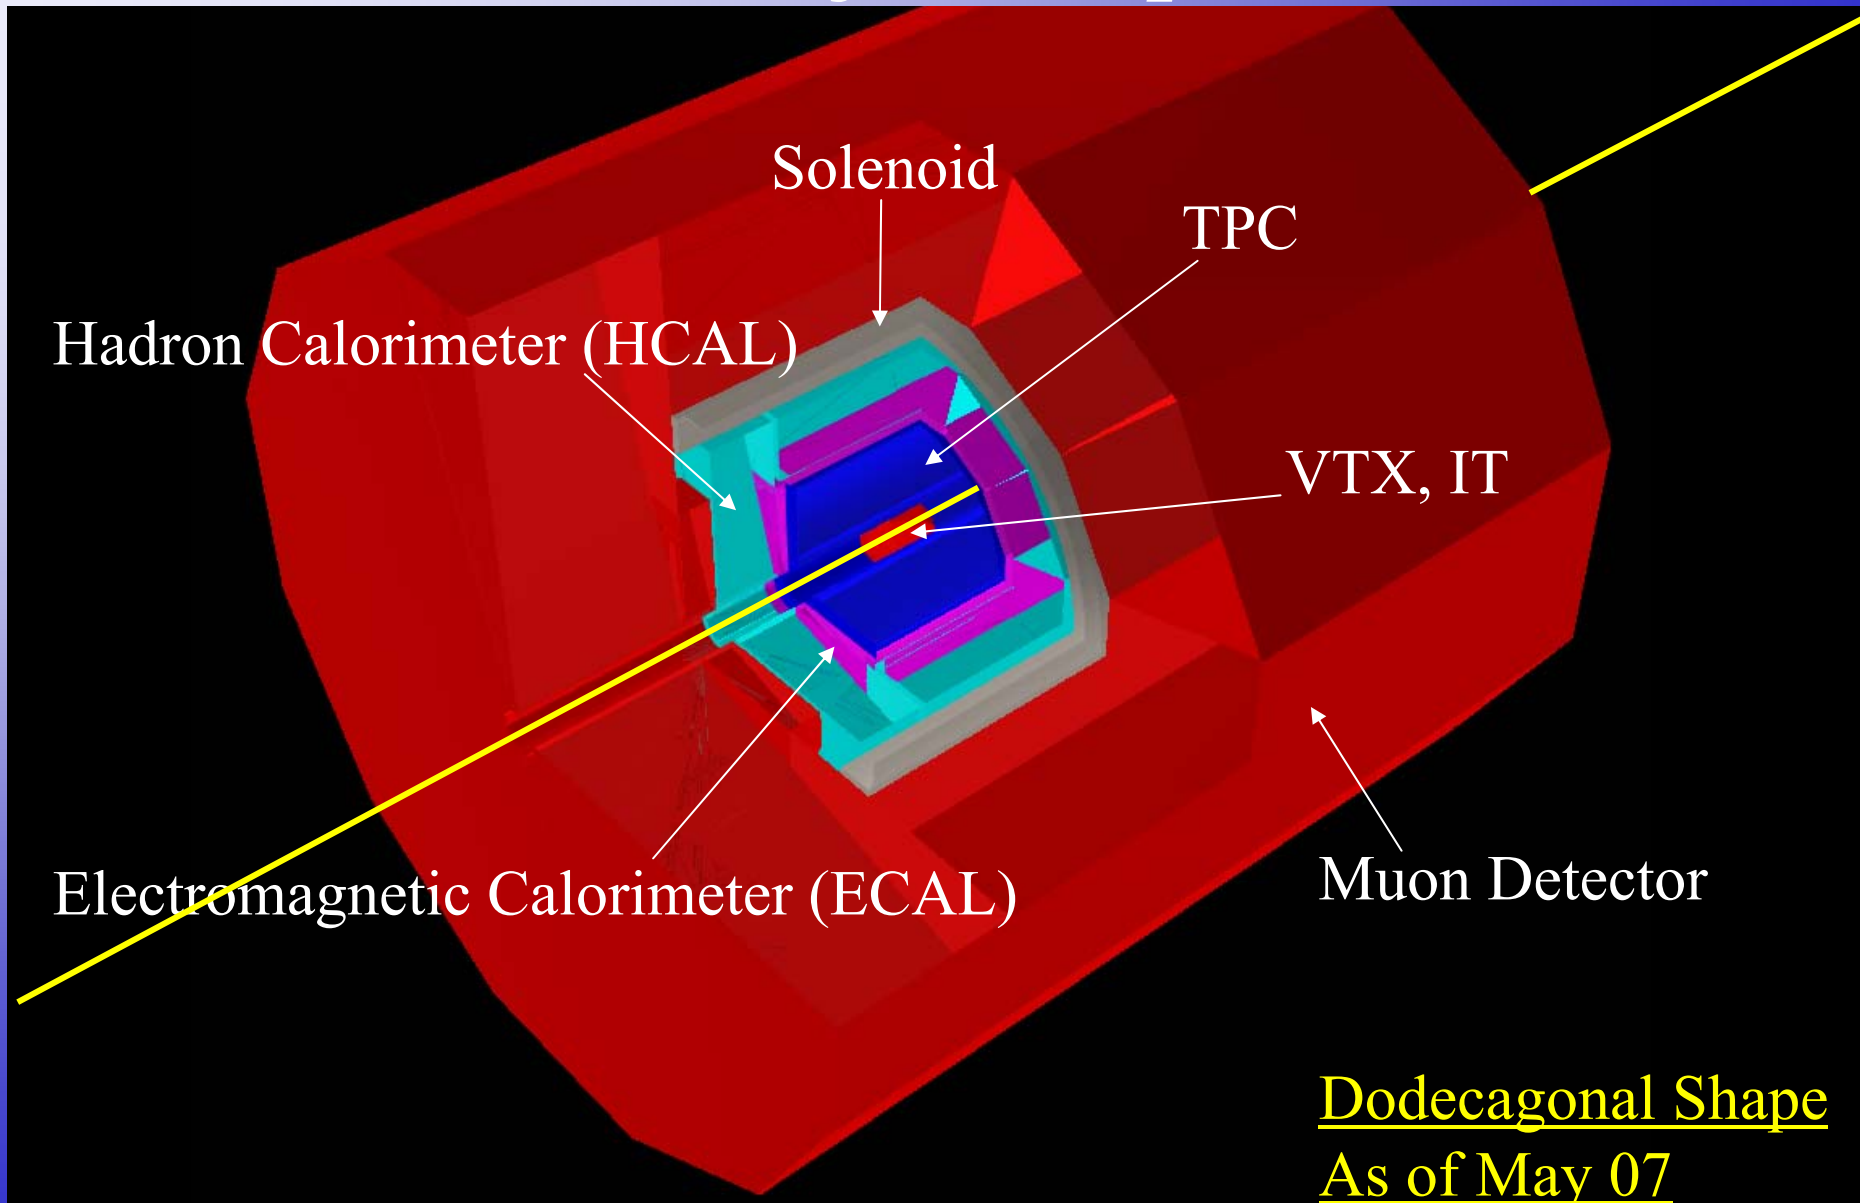

Dodecagonal Shape
As of May 07

Calorimeter Geometry in Jupiter

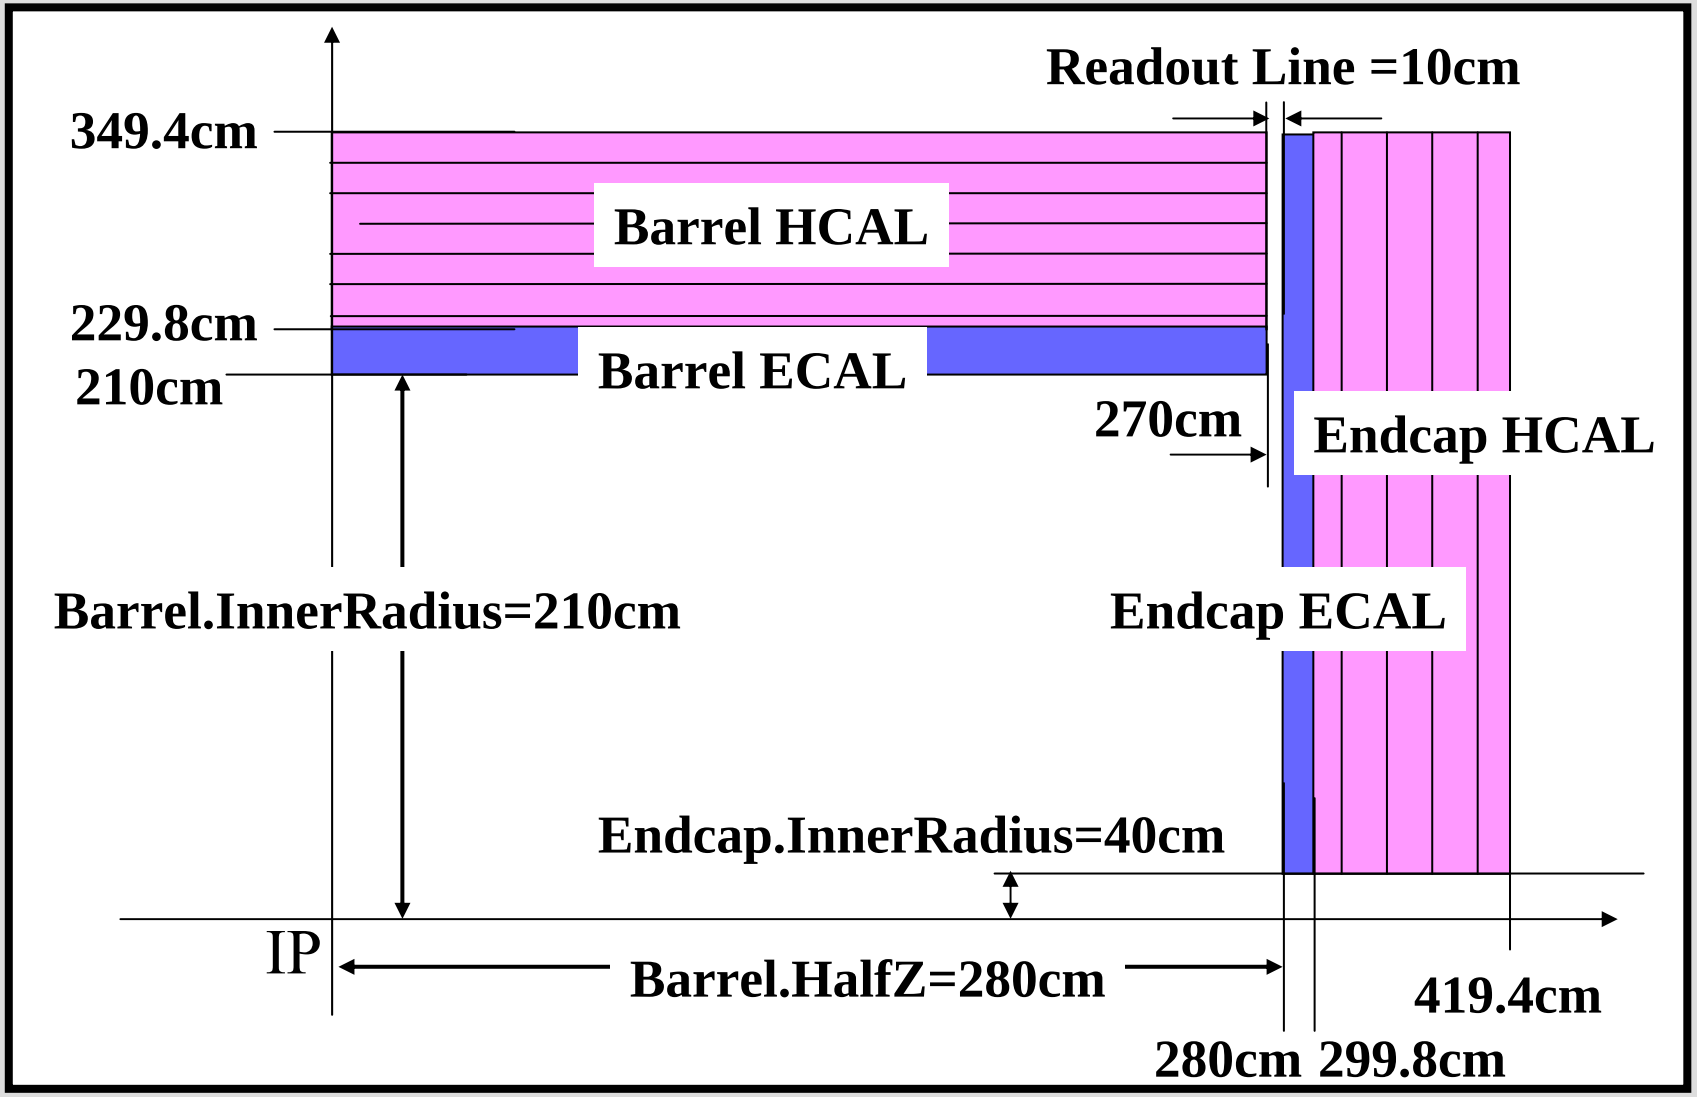

Calorimeter Structure

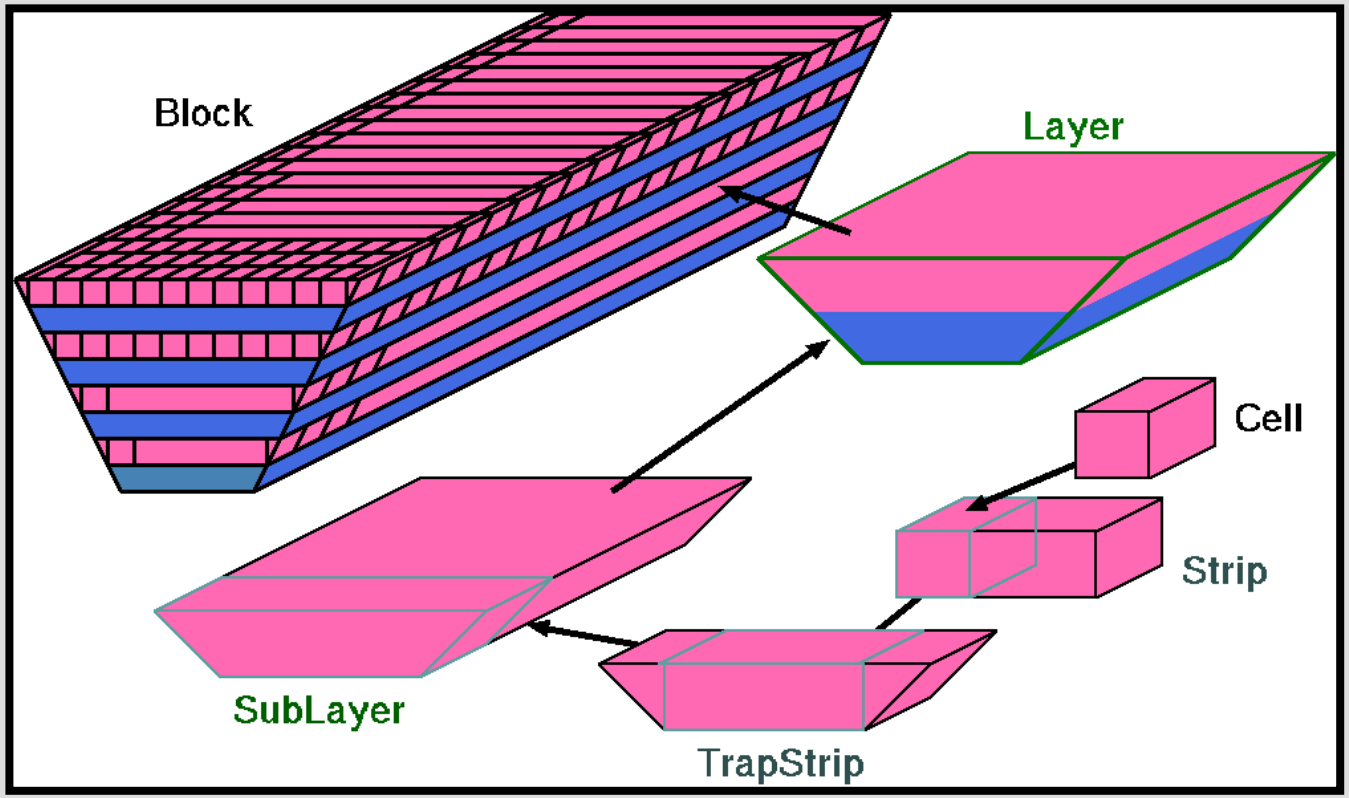

Active Layer

Absorber

Current cell size : 1x1cm
Can be changed.

ECAL	HCAL
W/Scinti./Gap	Fe/Scinti./Gap
3/2/1 (mm) x 33 layers	20/5/1 (mm) x 46 layers

Z-pole Event Display

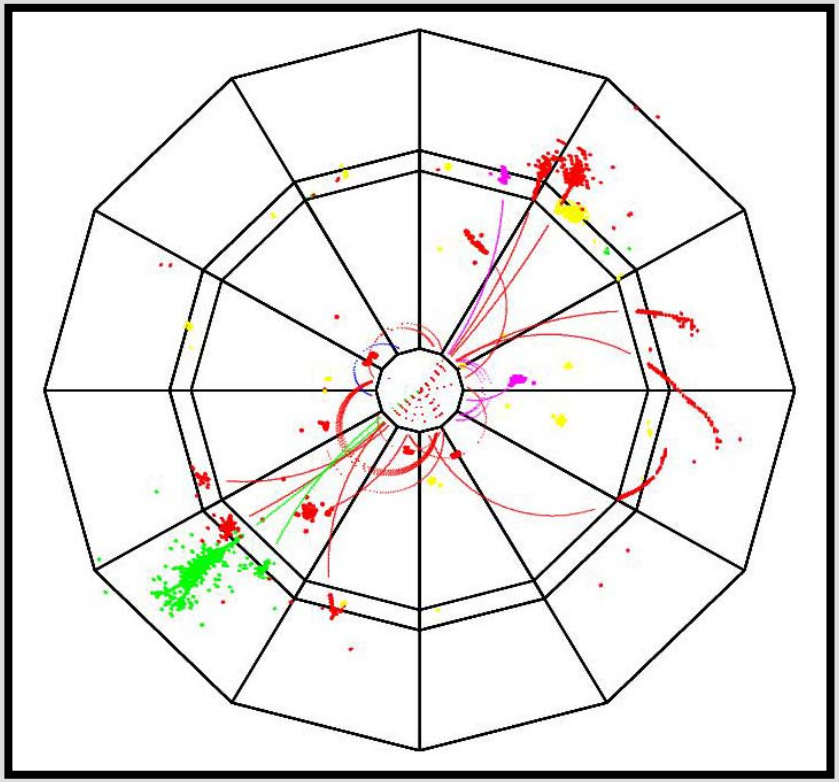

End View

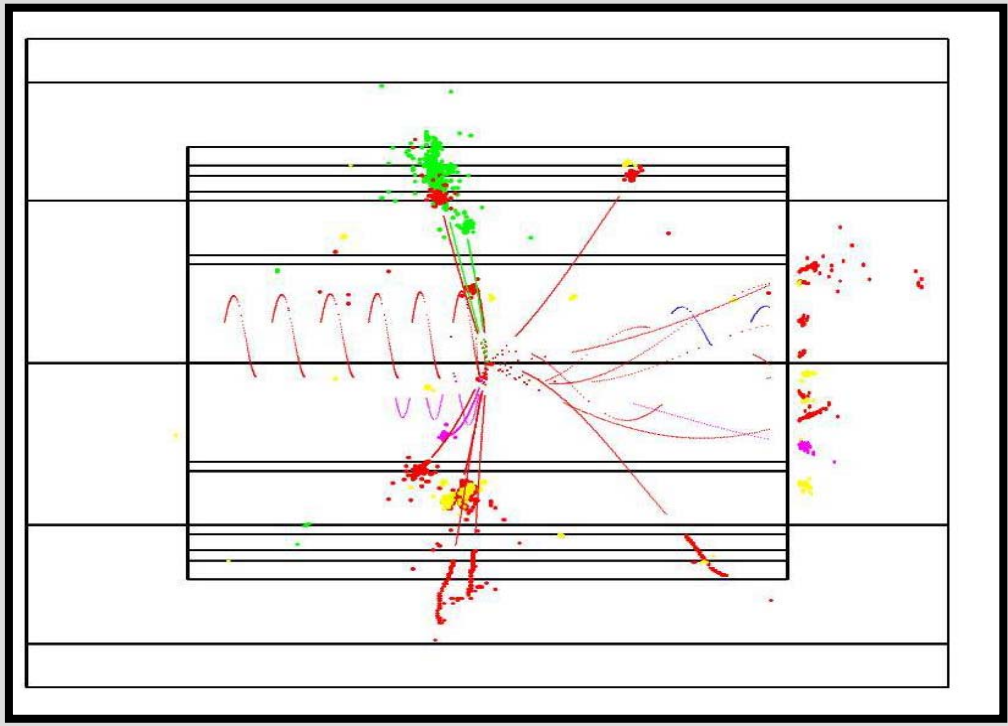

Side View

- Z → qq (uds) @ 91.2GeV, tile calorimeter, 1cm x 1cm tile size

Particle Flow Algorithm for GLD

Flow of GLD-PFA

1. Photon Finding
2. Charged Hadron Finding
3. Neutral Hadron Finding
4. Satellite Hits Finding

   *Satellite hits = calorimeter hit cell which does not belong to a cluster core

Note : Monte-Carlo truth information is used for muon and neutrino.

Photon Likelihood

- Five variables are selected to form the photon likelihood function.

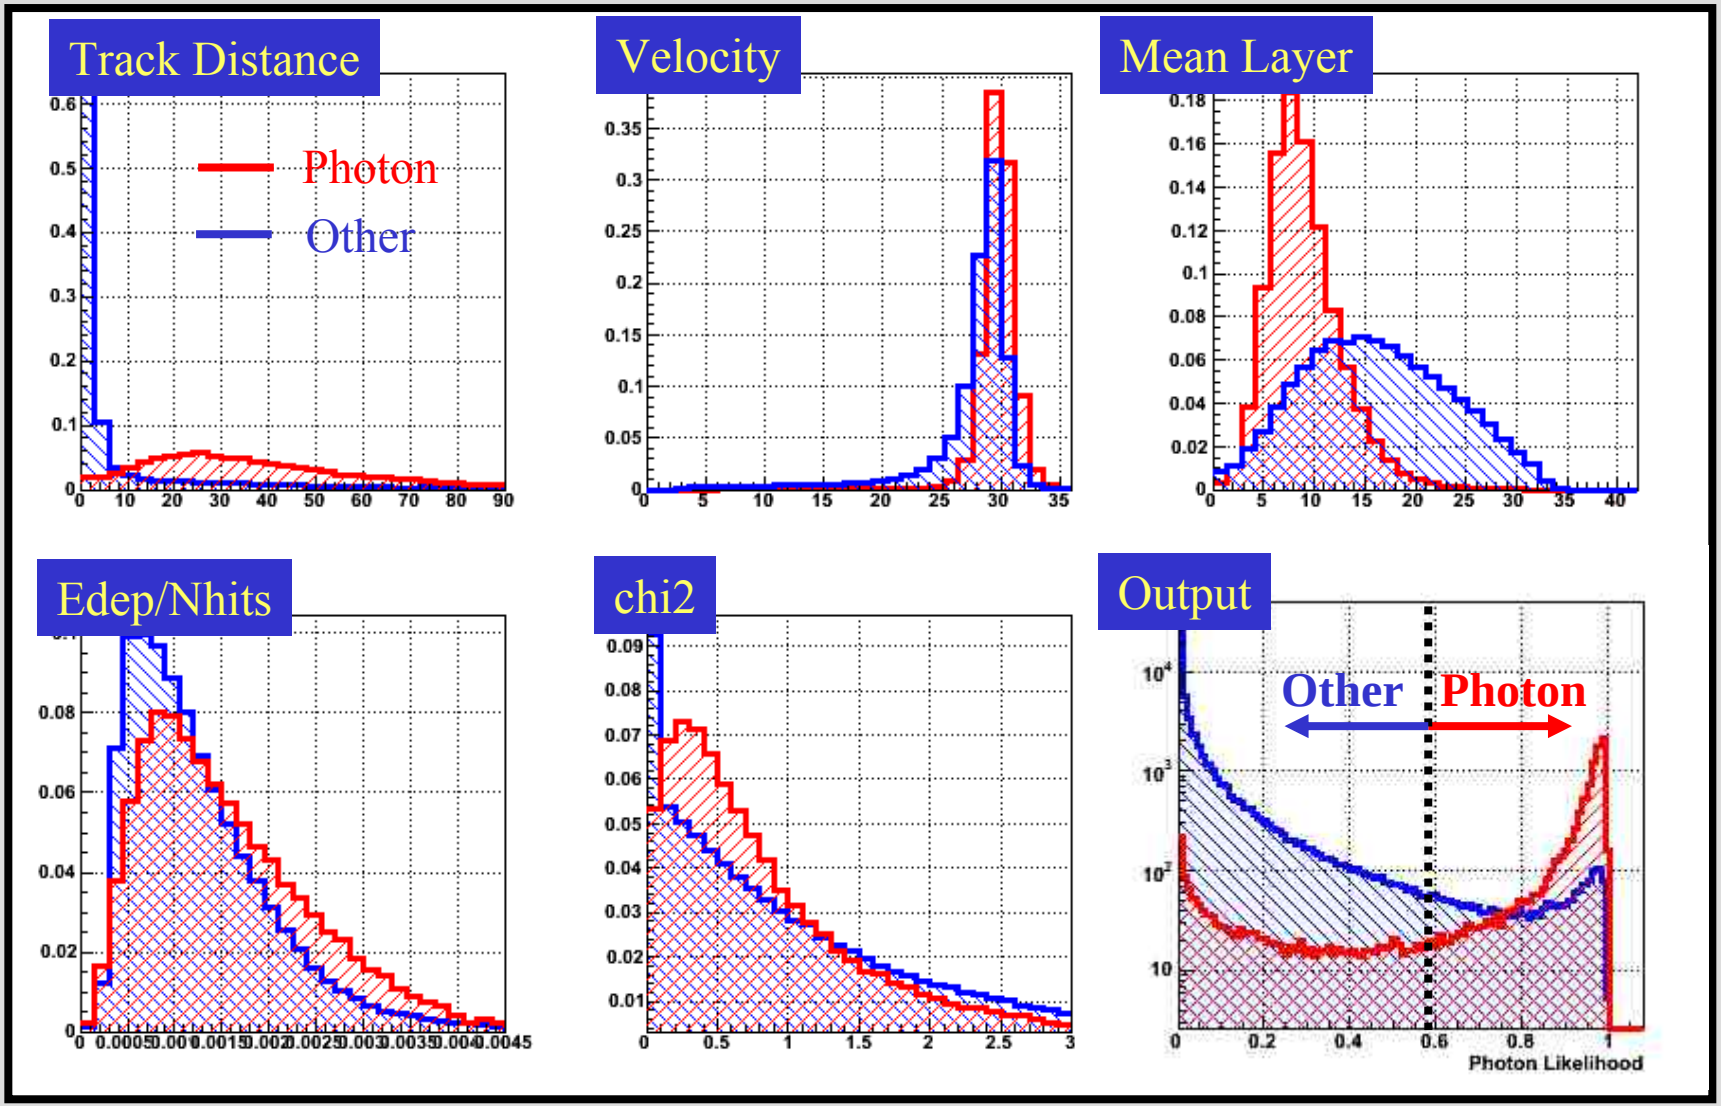

Particle Flow Algorithm for GLD

Flow of GLD-PFA

1. Photon Finding
2. Charged Hadron Finding
3. Neutral Hadron Finding
4. Satellite Hits Finding

*Satellite hits = calorimeter hit cell which does not belong to a cluster core

Note : Monte-Carlo truth information is used for muon and neutrino.

Charged Hadron Finding

- ***Basic Concept*** :
  Extrapolate a charged track and calculate a distance between a calorimeter hit cell and the extrapolated track. Connect the cell that in a certain tube radius (clustering).

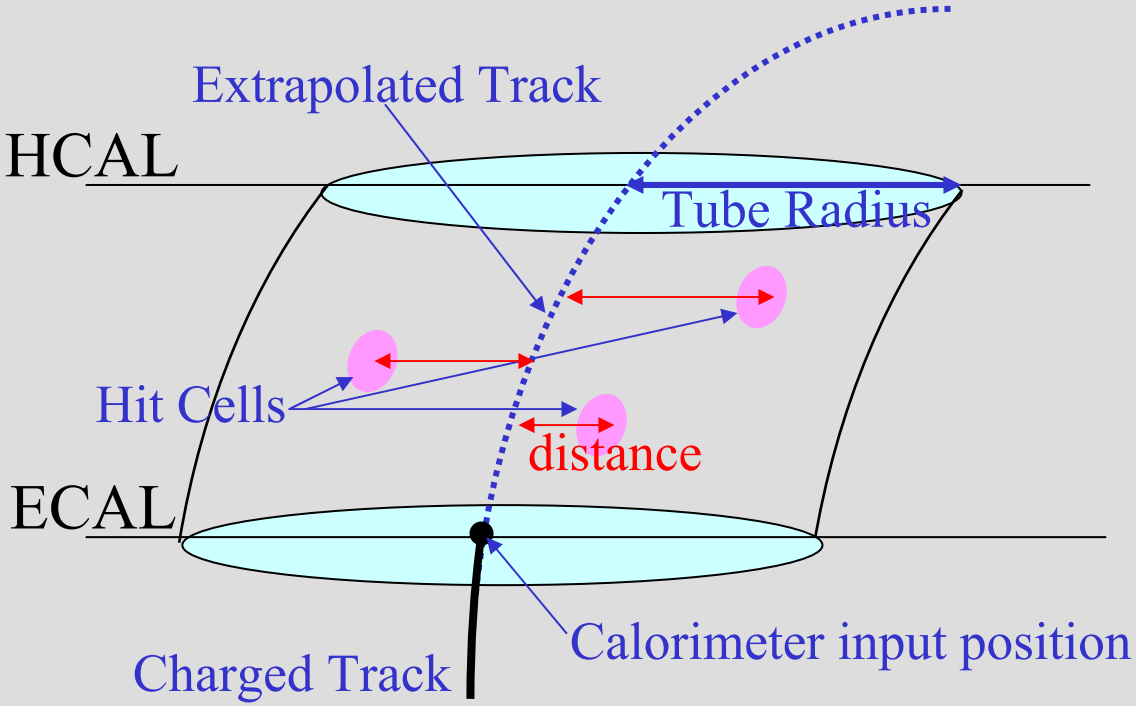

- Calculate the distance for any track/calorimeter cell combination.

- Tube radius for ECAL and HCAL can be changed separately.

Particle Flow Algorithm for GLD

Flow of GLD-PFA

1. Photon Finding
2. Charged Hadron Finding
3. Neutral Hadron Finding
4. Satellite Hits Finding

*Satellite hits = calorimeter hit cell which does not belong to a cluster core

Note : Monte-Carlo truth information is used for muon and neutrino.

Neutral Hadron Likelihood

- Four variables are selected to form the NHD likelihood function.

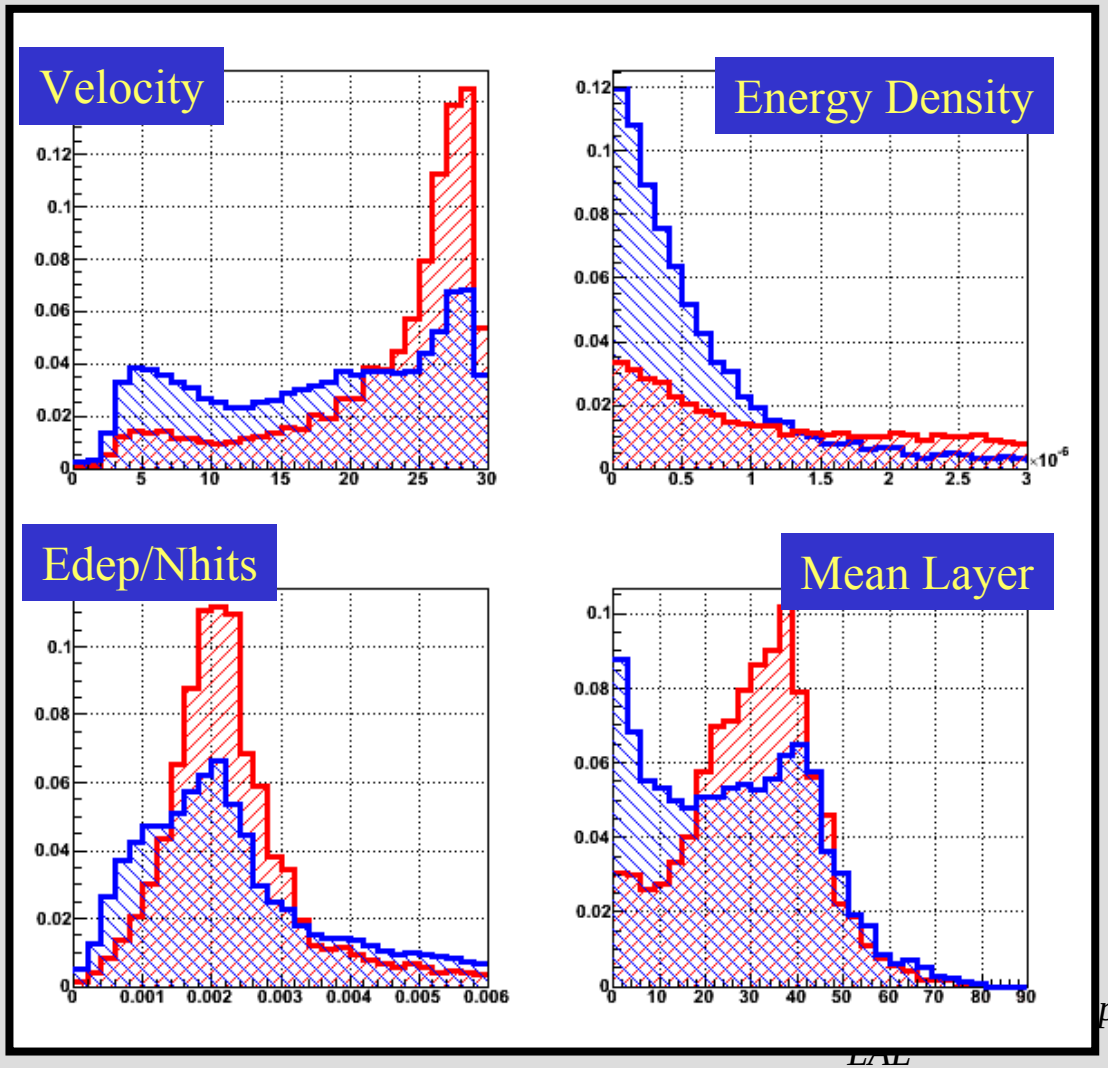

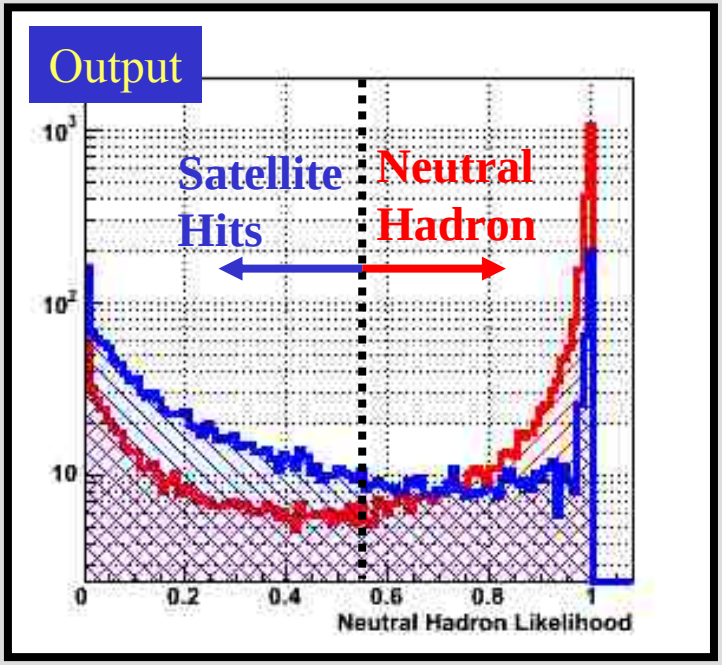

Neutral Hadron

Satellite Hits

Particle Flow Algorithm for GLD

Flow of GLD-PFA

1. Photon Finding
2. Charged Hadron Finding
3. Neutral Hadron Finding
4. Satellite Hits Finding

   *Satellite hits = calorimeter hit cell which does not belong to a cluster core

Note : Monte-Carlo truth information is used for muon and neutrino.

Jet Energy Resolution (Z-pole)

- Z → uds @ 91.2GeV, tile calorimeter, 1cm x 1cm tile size

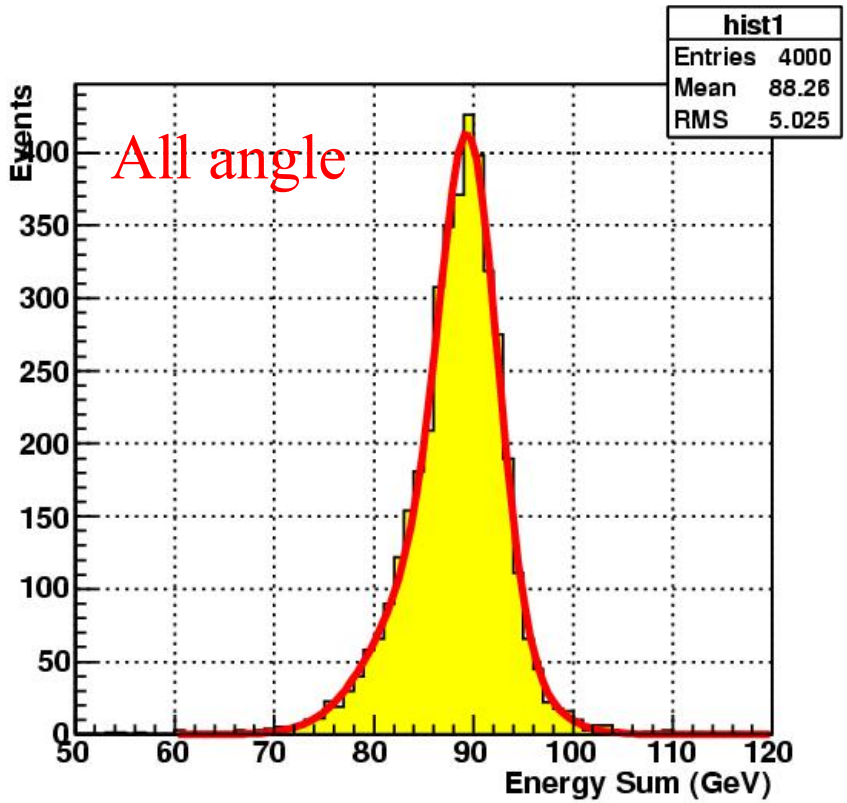

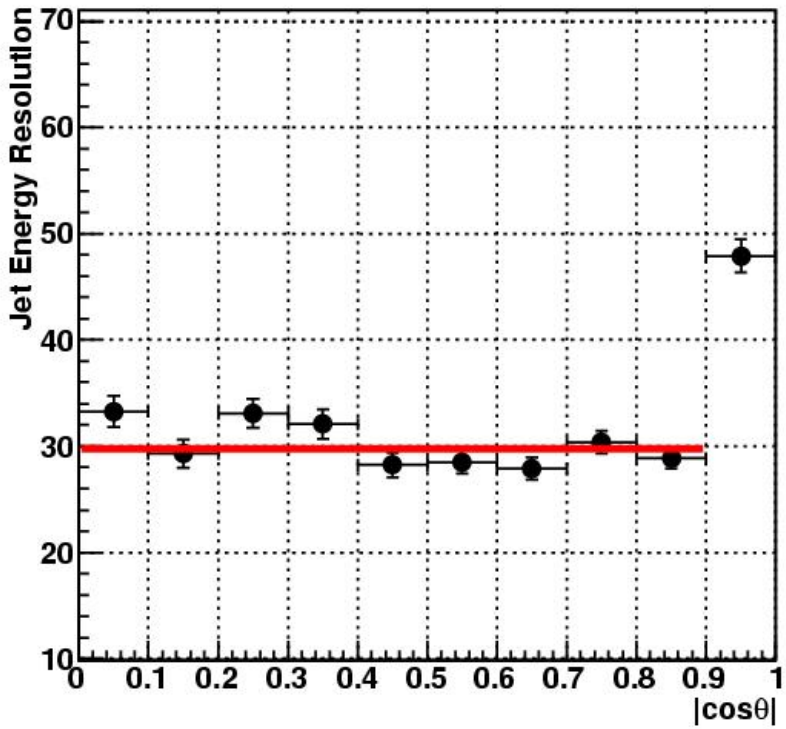

- Almost no angular dependence : ~30%/√E for |cosθ|<0.9.
- cf. 60 %/√E w/o the PFA (sum up the calorimeter energy)

Jet Energy Resolution (Z-pole)

- Z → uds @ 91.2GeV, tile calorimeter, 1cm x 1cm tile size

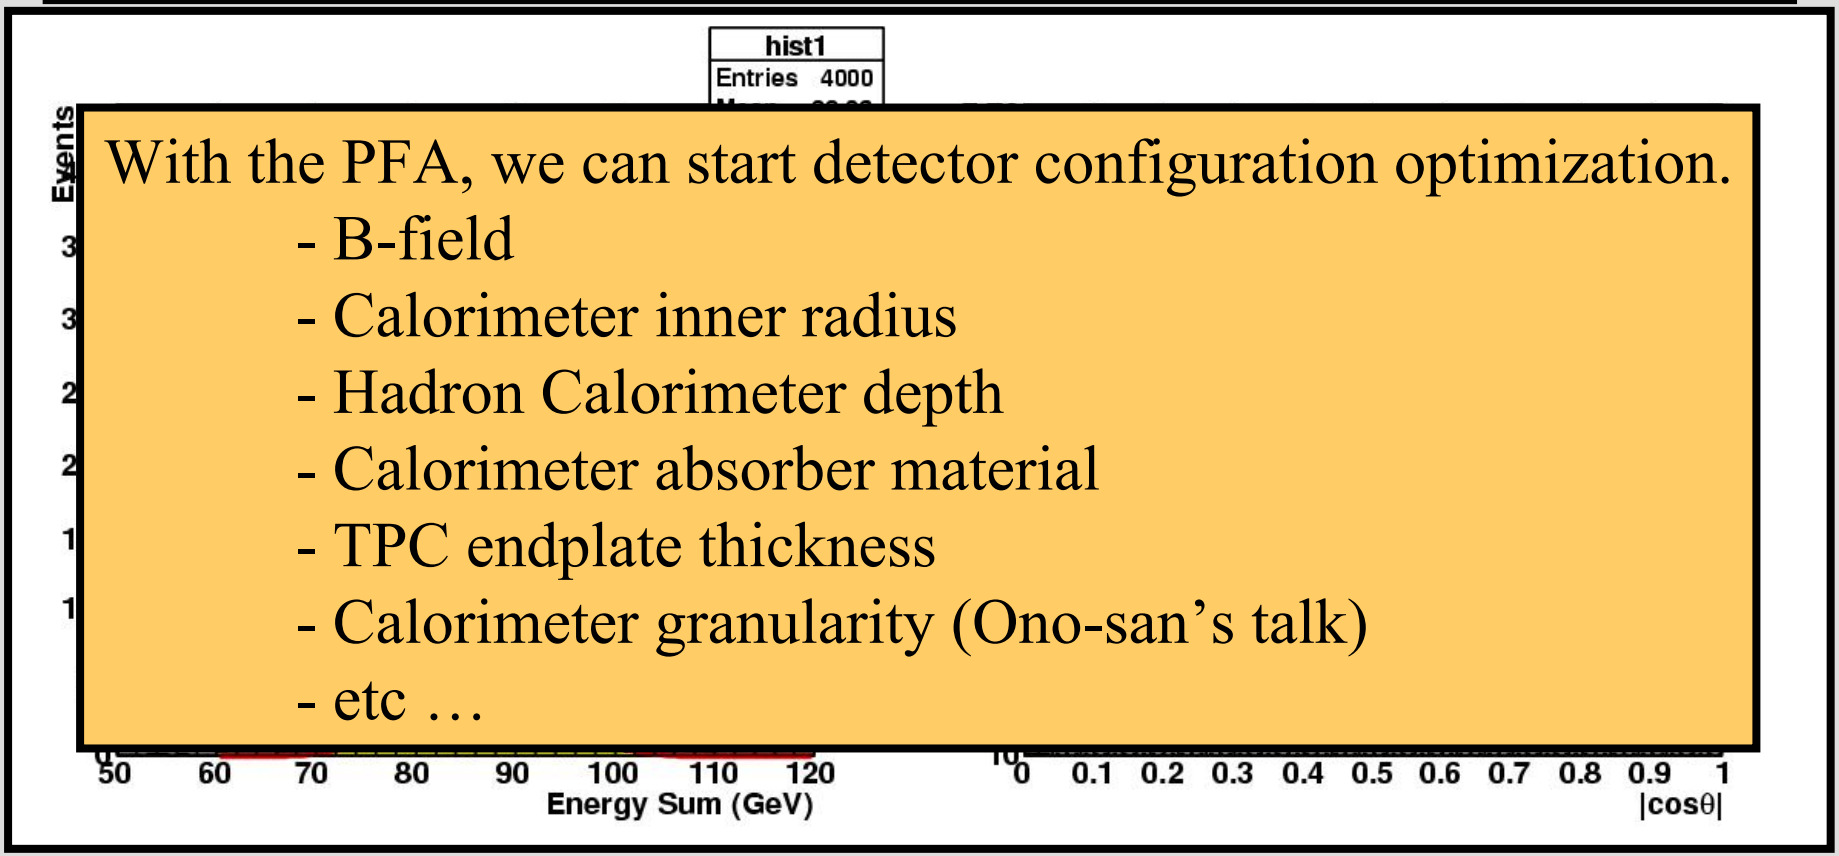

With the PFA, we can start detector configuration optimization.

- B-field
- Calorimeter inner radius
- Hadron Calorimeter depth
- Calorimeter absorber material
- TPC endplate thickness
- Calorimeter granularity (Ono-san's talk)
- etc …

- Almost no angular dependence : ~30%/√E for |cosθ|<0.9.
- cf. 60 %/√E w/o the PFA (sum up the calorimeter energy)

B-field Dependence

- B-field dependence of the PFA performance is studied.
  Default B-field = 3 Tesla, 1cm x 1cm cell size.

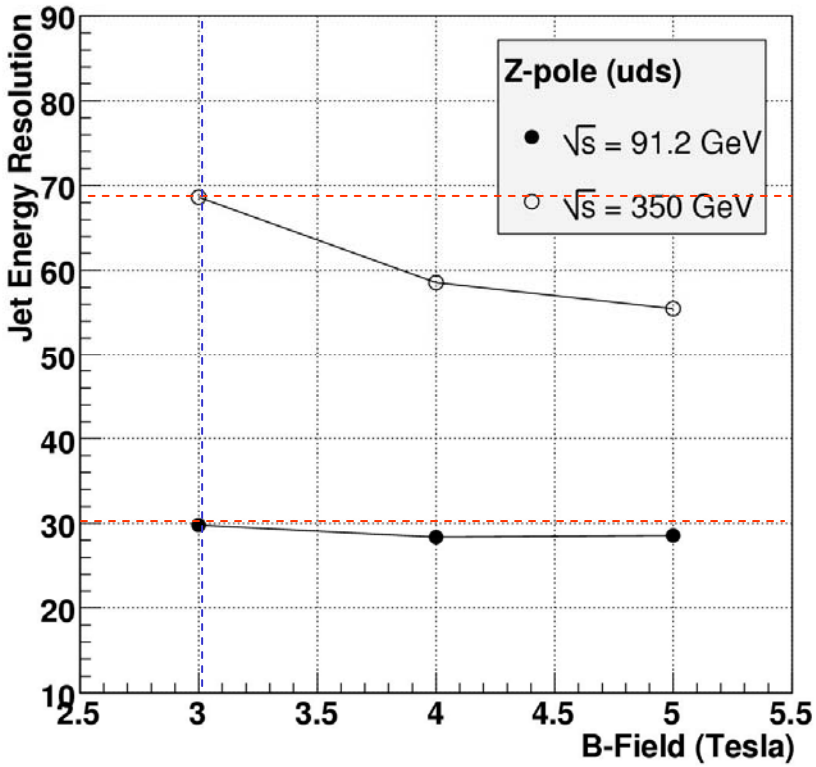

- Higher magnetic field gives better PFA performance as expected.
- 5 Tesla case does not improve PFA performance very much.

→ Due to low momentum tracks?

Ecm	3 Tesla	4 Tesla	5 Tesla
91.2	29.8±0.4	28.4±0.3	28.6±0.3
350	68.7±1.1	58.5±1.0	55.5±0.9

ECAL Radius Dependence

- ECAL inner radius dependence of the PFA performance is studied. Default Radius = 210 cm, 1cm x 1cm cell size.

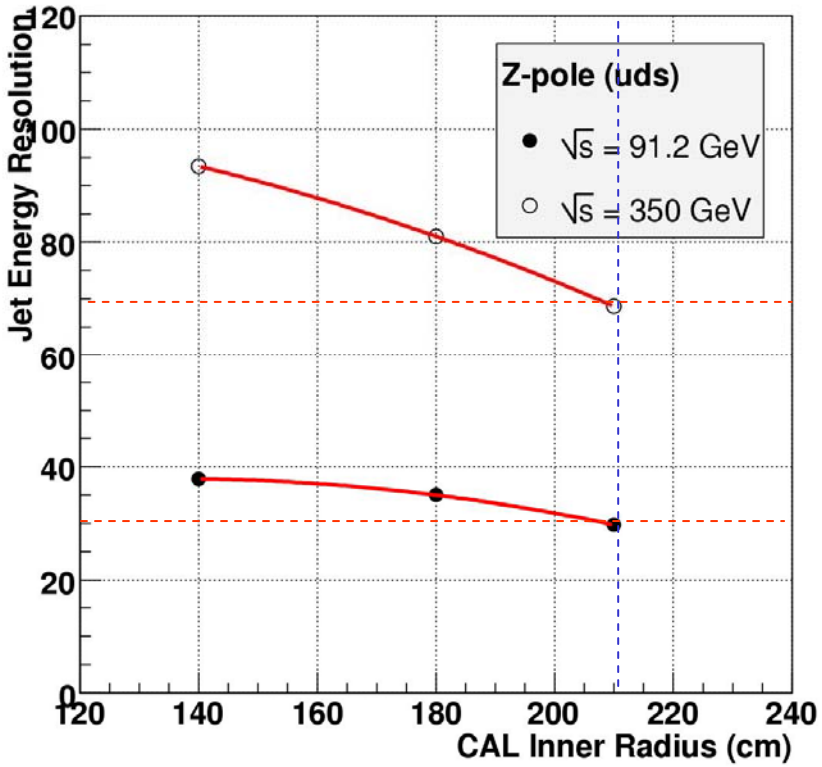

- Larger calorimeter radius gives better PFA performance as expected.
- PFA performance depends on the CAL radius squared.

Ecm	140 cm	180 cm	210 cm
91.2	37.9±0.4	35.0±0.4	29.8±0.4
350	93.4±1.5	81.0±1.3	68.7±1.1

HCAL Depth

- HCAL depth dependence of the PFA performance is studied. Default thickness = 5.7 λ_0 , 1cm x 1cm cell size.

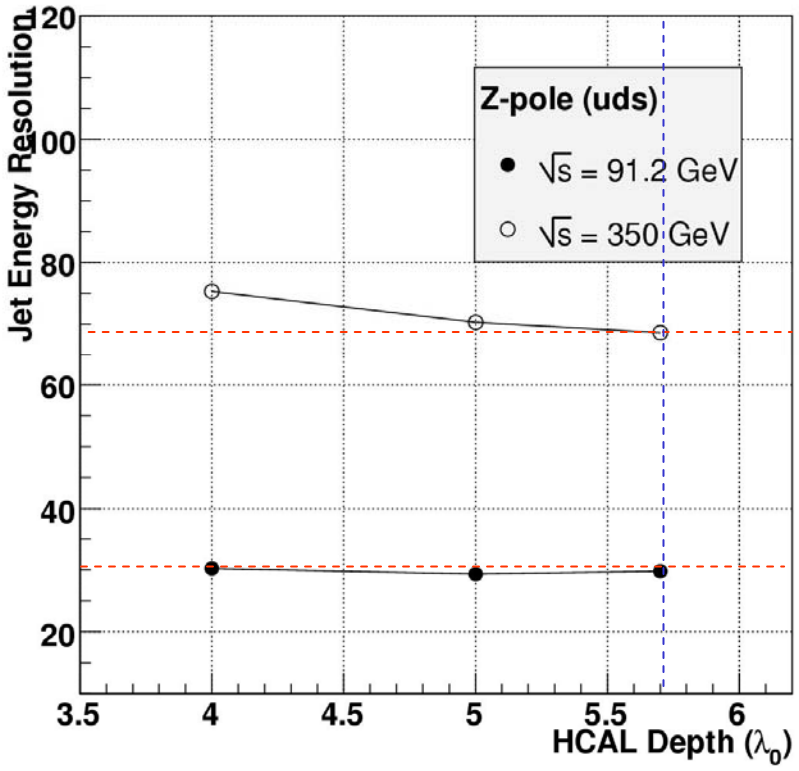

- Thinner HCAL gives worse PFA performance due to shower leakage.
- 5 λ_0 HCAL does not degrade PFA performance so much even for Ecm = 350GeV.

Ecm	4.0 λ_0	5.0 λ_0	5.7 λ_0
91.2	37.9±0.4	35.0±0.4	29.8±0.4
350	93.4±1.5	81.0±1.3	68.7±1.1

Absorber Material

- CAL absorber material dependence of the PFA performance is studied. Default = W ECAL, Fe HCAL, 1cm x 1cm cell size.

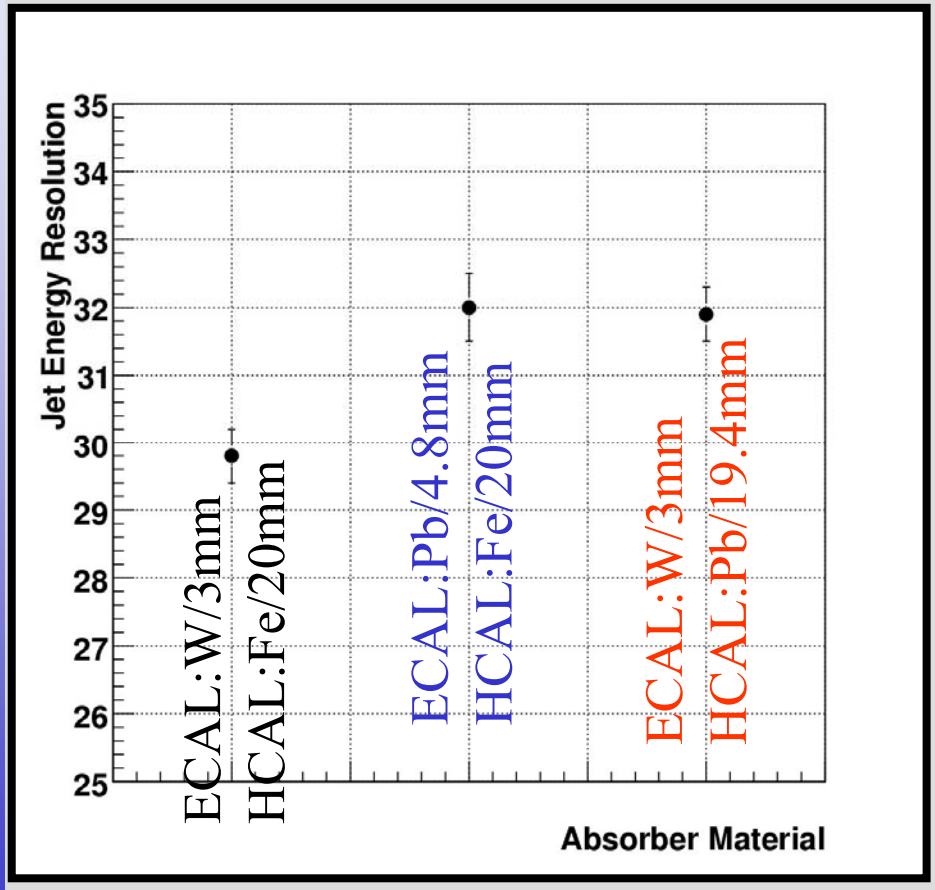

- The absorber thickness is adjusted so that the total radiation (interaction) length become the same as that of default configuration.
- Pb ECAL and/or HCAL are comparable to default.

Default	Pb ECAL	PbHCAL
29.8±0.4	32.0±0.5	31.9±0.4

Summary

- Realistic PFA has been developed using the GEANT-4 based full simulator of the GLD detector.
- Jet energy resolution is studied by using $Z \rightarrow qq$ events. ILC goal of $30\%/\sqrt{E}$ has been achieved in the barrel region of the Z-pole events.
- PFA performance with various GLD configuration has been studied.
  - → High B-field/Large Calorimeter gives better performance as expected.
  - → PFA performance of Pb calorimeter is comparable to that of default configuration.