
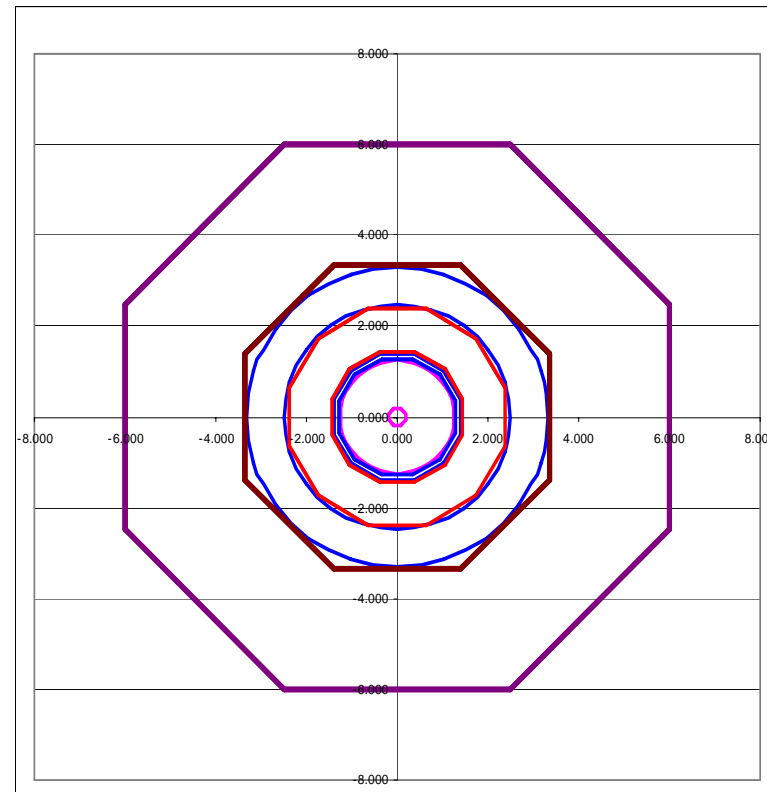


SiD Optimization

M. Breidenbach ALPCG 2007

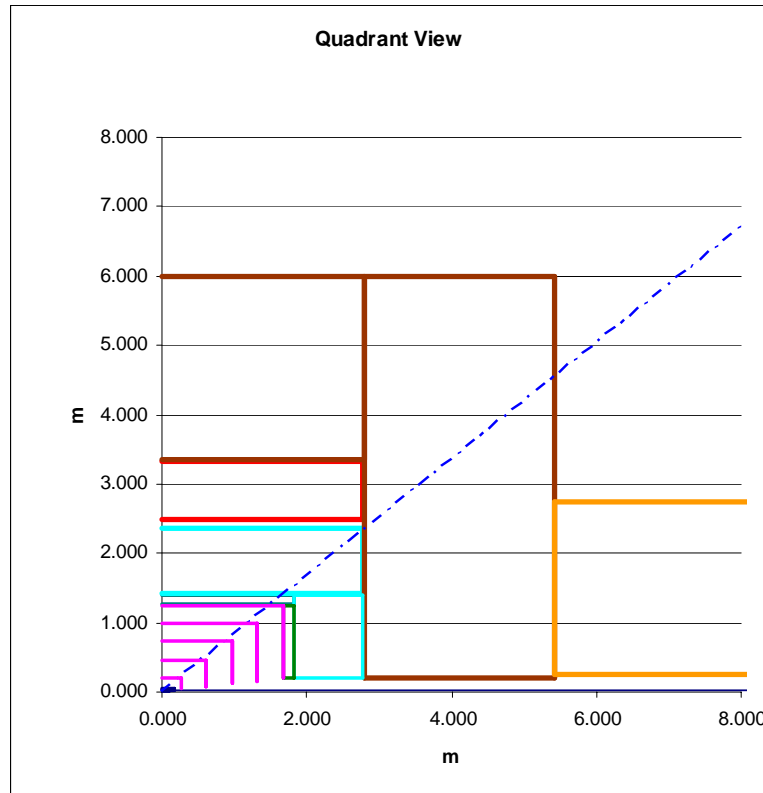

SiD Optimization

Optimization - Definitions:

- The search for the best solution among alternatives, or the extreme value of a variable or a function.
- Finding the solution that is the best fit to the available resources.
See tuning.
- The refinement process used to find the best solution to a problem.
To solve an optimization problem computationally, one writes a program in such a way as to maximize or minimize the value of a cost function.

SiD Baseline

- $R_{\text{trkr}}=1.25$ m
- $B=5T$
- HCal $\lambda=4.0$
- $\text{Cos}(\theta_{\text{trkr}}) = 0.8$

- Will concentrate on here on HCal issues. (Not that there are no other issues, but IMHO this is the one that is most important)


- HCal Major parameters (Baseline!!!):

- Stainless Steel Radiator
 - 2 cm = 0.12 I.L = 1.1 R.L. layers
 - 8 mm gaps
 - 34 layers
- RPC detectors
 - 2750 m² @ \$2000/m² (not including R.O.C.)


SiD Baseline Cost

- What is a cost?
 - For simplicity, there are two cost models - ITER and US DOE accounting.
 - ITER costs the M&S in currency units (ILC uses \$ units) and the (in house) labor in time units.
 - ITER does not do contingency or escalation.
 - ITER may include indirects.
 - US DOE costs the M&S and labor in \$. It includes contingency, indirects and escalation.
- SiD can convert between the two systems, but it is easier to work US DOE style.

The "other" costs are not small!

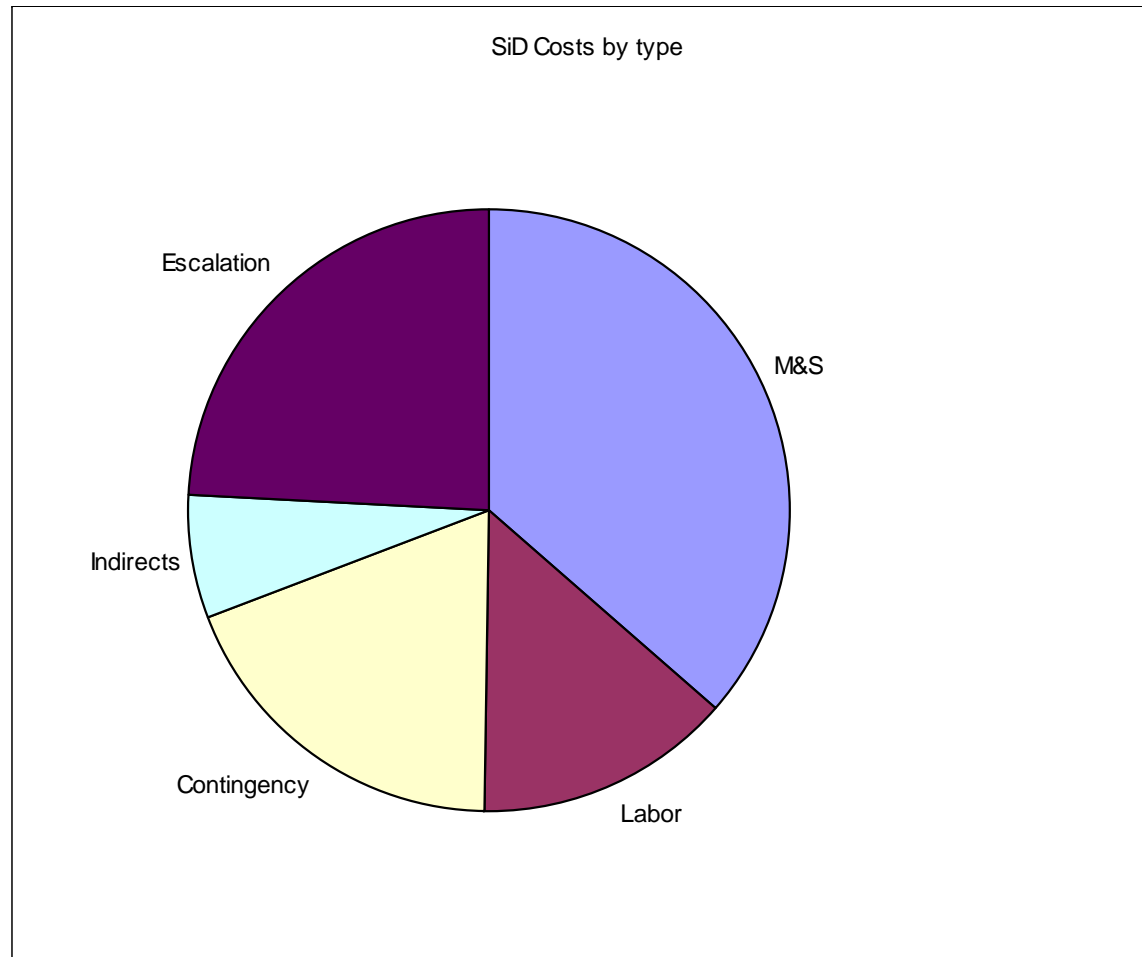

SiD Costs - Subsystems, Escalation, and Indirects

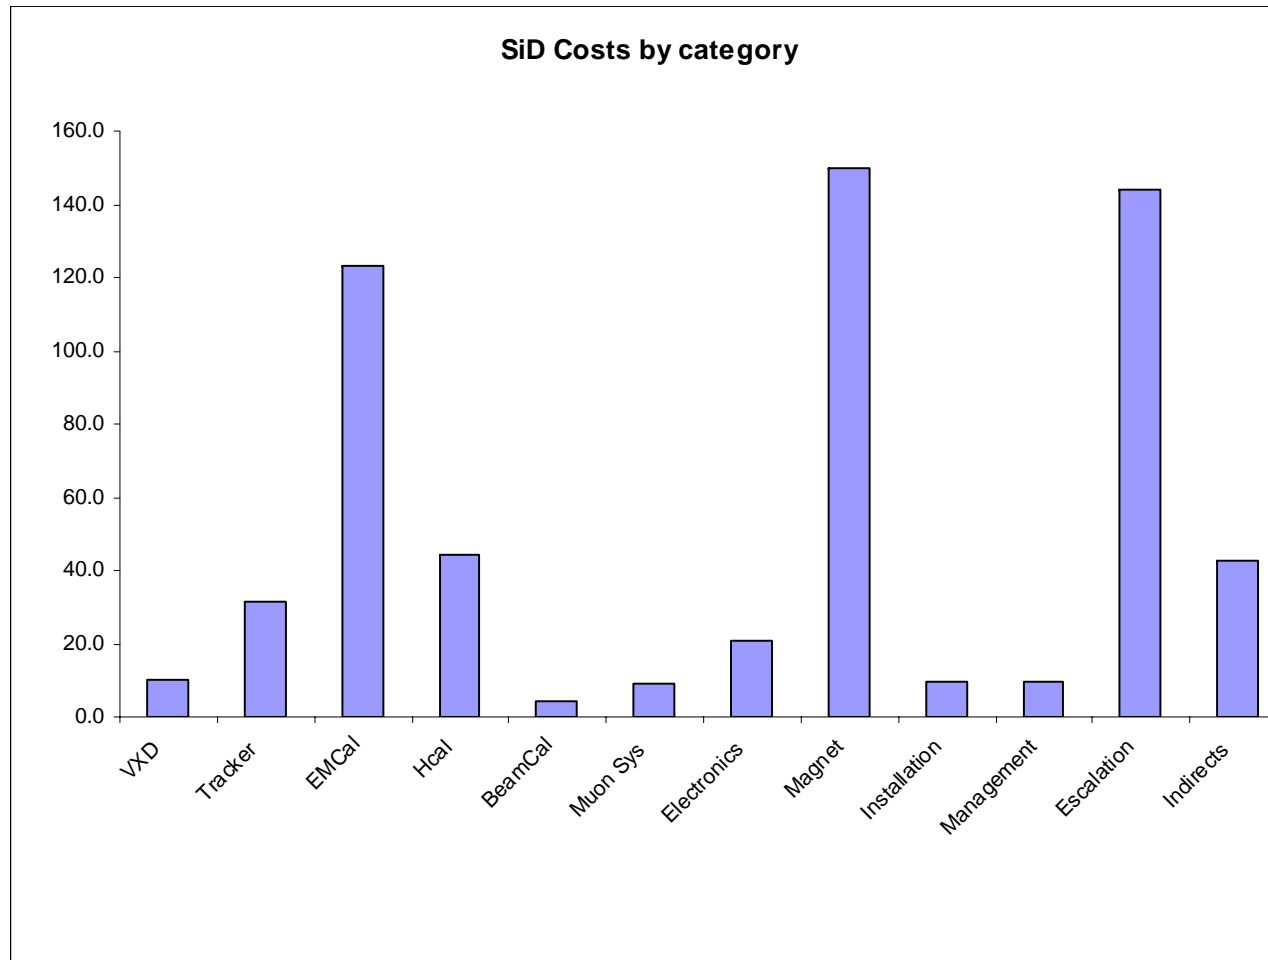



SiD Baseline

	M&S	Labor	Totals
Base	\$206	\$95	\$301
Contingency	\$78	\$33	\$111
Total	\$284	\$128	\$412
Indirect rates	0.06	0.20	
Indirects	\$17	\$26	\$43
Totals w indirects	\$301	\$153	\$454

Either of these might be the "ILC Detector" Cost

Total in FYXXXX		
M\$	2007	454.4
Start Year	2012	
Construction Duration	6 years	
Inflation	1.035 per year.	
Factor	1.317	
Total Escalation		144.0
Total, TYM\$		598.4


Simple Examples - N as in Ngons

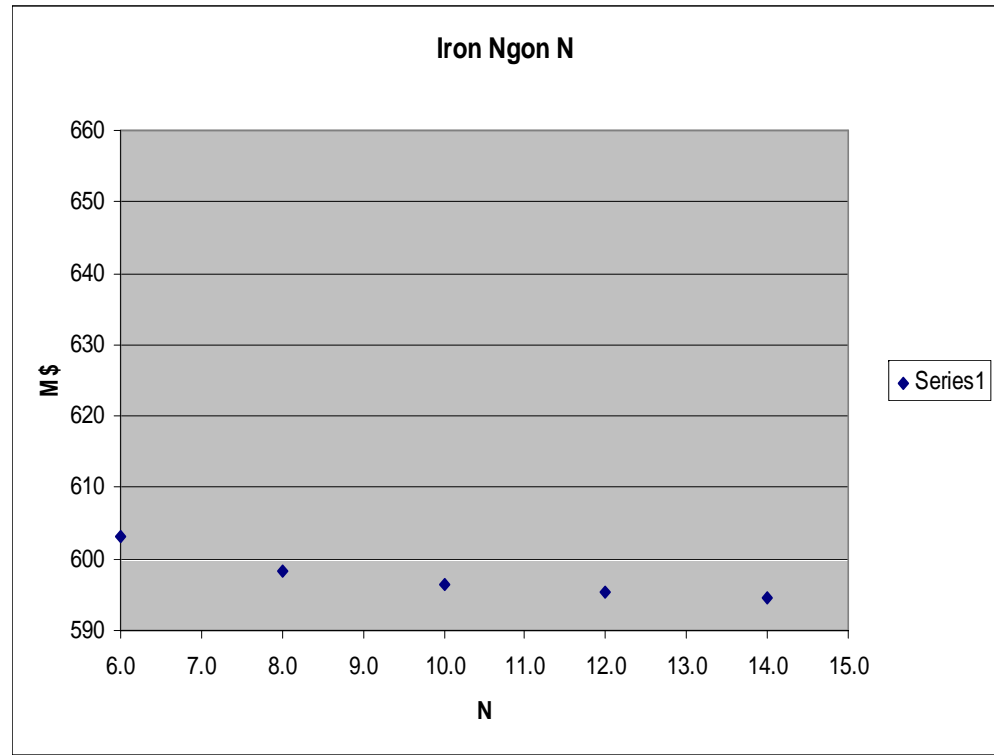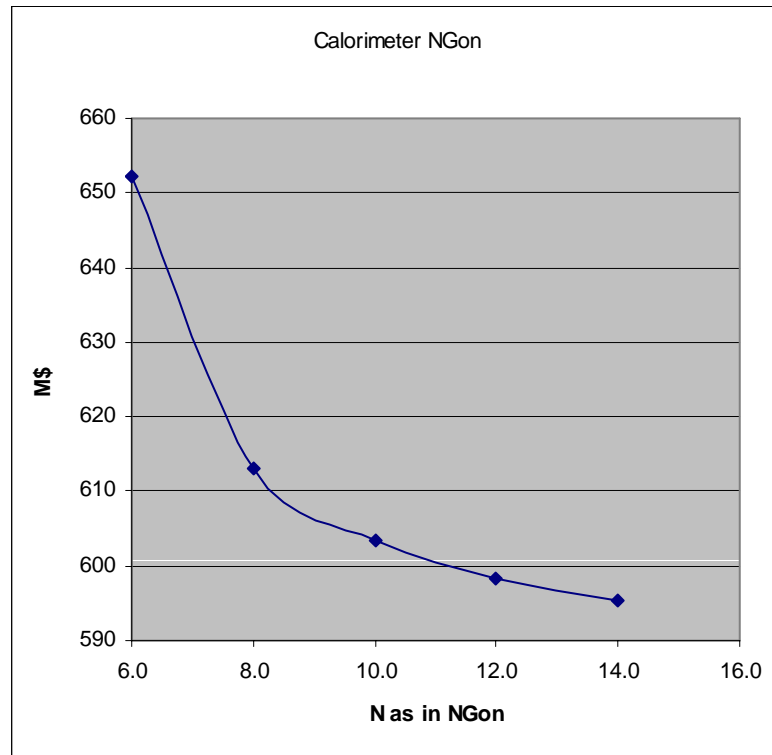

Relevant Example

<u>Variation</u>	<u>Price (M\$)</u>	
• Baseline	598	Fe, 20 mm = 1.1 X_0 /layer; 34 layers
• 4.5 λ	621	
• 3mm HCal gap	594	
• Silicon for HCal	763	(Nope!)
• Back to RPC's	621	
• Cu Radiator	625	15 mm = 1.0 X_0 /layer; 45 layers
• Cu Radiator	570	29 mm = 2.0 X_0 /layer; 23 layers

Attempt to estimate Cu price

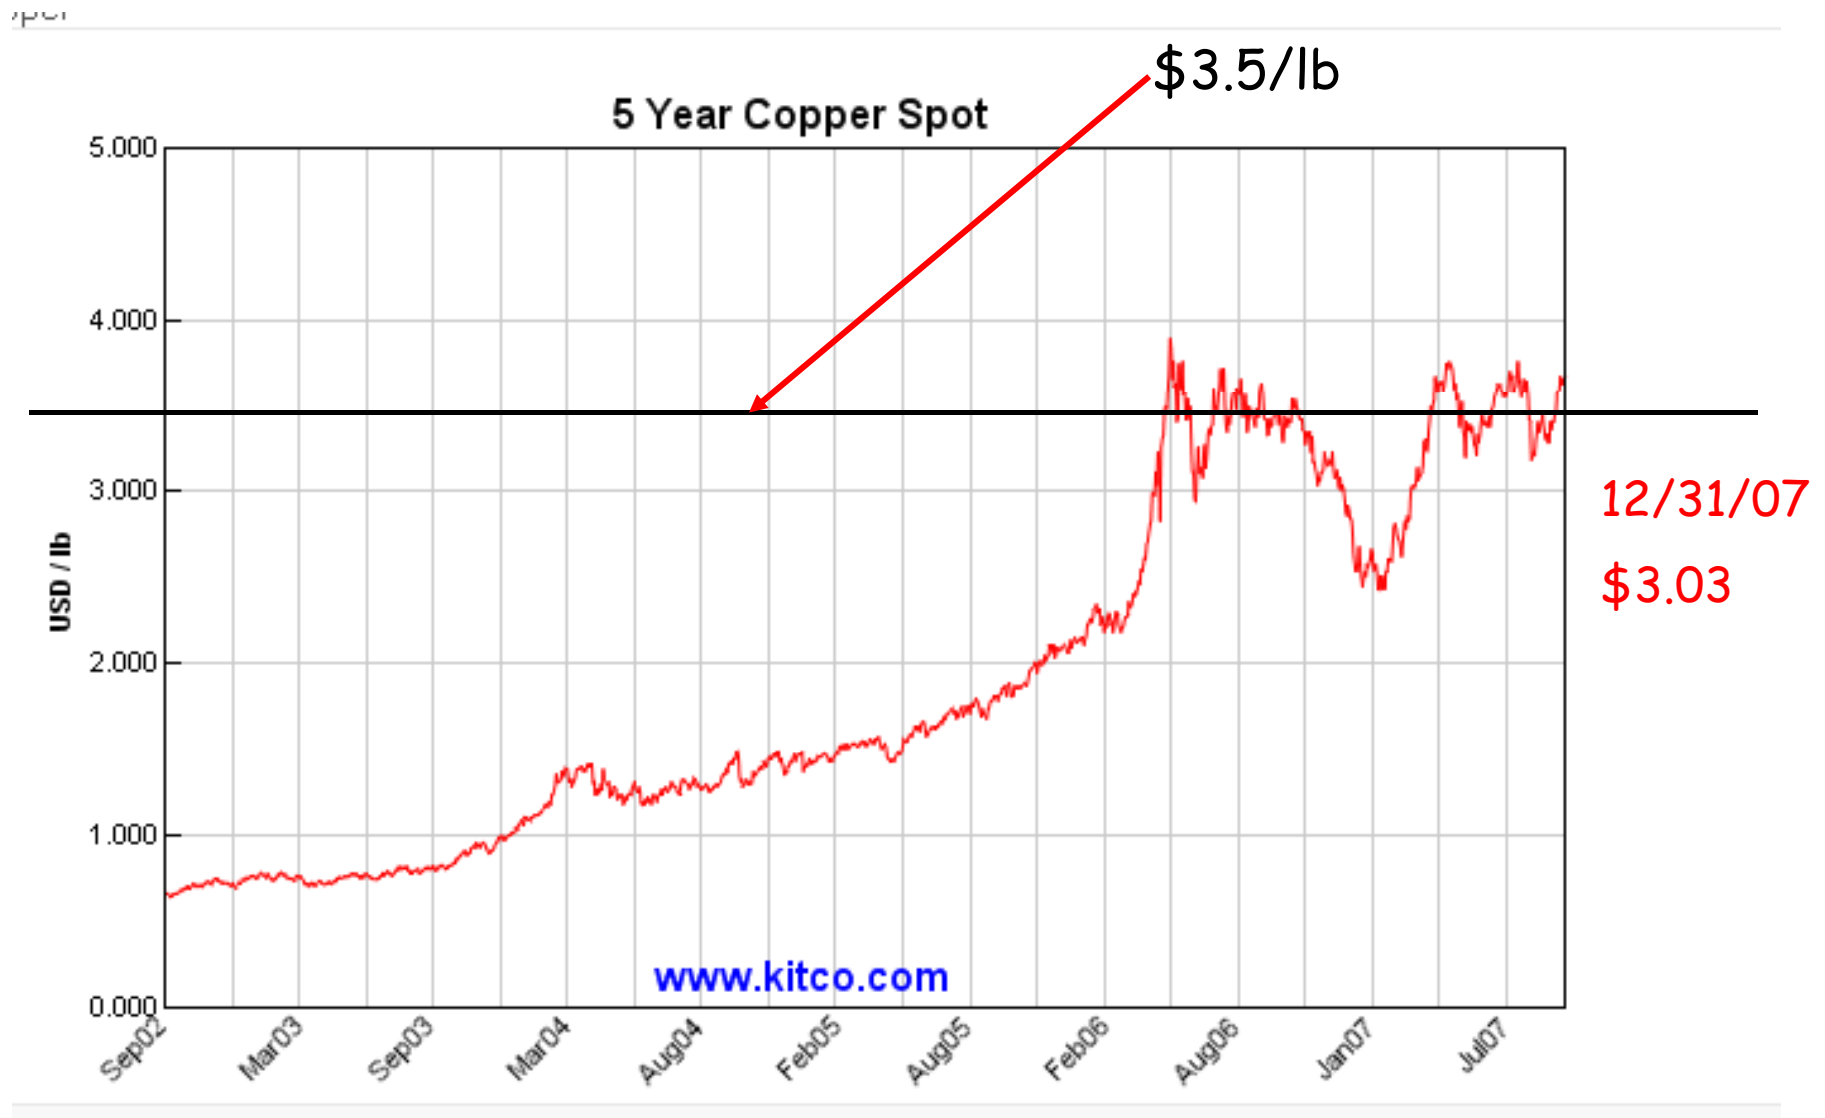

Conclusions (for HCal Radiator)

- Variation in a system can have major effects on the bottom line.
- We need to understand the options for the HCal radiator
- We need to understand the needed radiator thickness.
- We need to understand the total HCal thickness.
- We need to understand the gap.
- We need to understand the performance differences of plastic vs gas detectors.
- All of the above are coupled!!


The Hard Problem - Global Optimization

- Philosophically, SiD has “bought” Particle Flow, but we do not have a mature Particle Flow Algorithm (PFA), and what we have appears to yield substantially larger resolutions than Pandora (x2??).
- “The Plan” was to use a trusted, tuned, believed PFA in benchmark physics reactions to adjust $R_{\text{trkr}}=1.25$ m, $B=5$ T, HCal $\lambda=4.0$, and $\text{Cos}(\theta_{\text{trkr}})=0.8$ to an optimum tradeoff between performance and cost.
- That now seems, at least for the “Letter of Intent” (due when??), overly ambitious, and the “New Hope” is to use (same adjectives) PFA to achieve a jet resolution goal, e.g. $\Delta E/E \leq 4\%$ at 180 GeV.
- This requires a parameterization of the resolution in terms of the major parameters, which then can characterize the SiD cost as a function of the resolution.


PFA Parameterization

- Mark Thompson has produced such a parameterization from Pandora. This code assumed plastic scintillator for the HCal, and *the parameterization comes with many caveats.*
- The parameterization is in B , R_{trkr} and N_{layers} of HCal. It does not address the detector aspect ratio - $\cos(\theta_{\text{trkr}})$. The N_{layers} can be translated roughly into HCal thickness, but all the subtleties of the thickness per layer are lost.
- For practice, we have boldly proceeded with evaluating the cost versus these parameters and thus $\Delta E/E$.
- Can not just "solve" for cost minima for fixed $\Delta E/E$ because the cost function is not well behaved, and wants to push the radius down and B (way) up!
- *Caveat: This is in no way a substitute for an SiD "owned" PFA!!!!*


Cost vs PFA DeltaE/E for 180 GeV

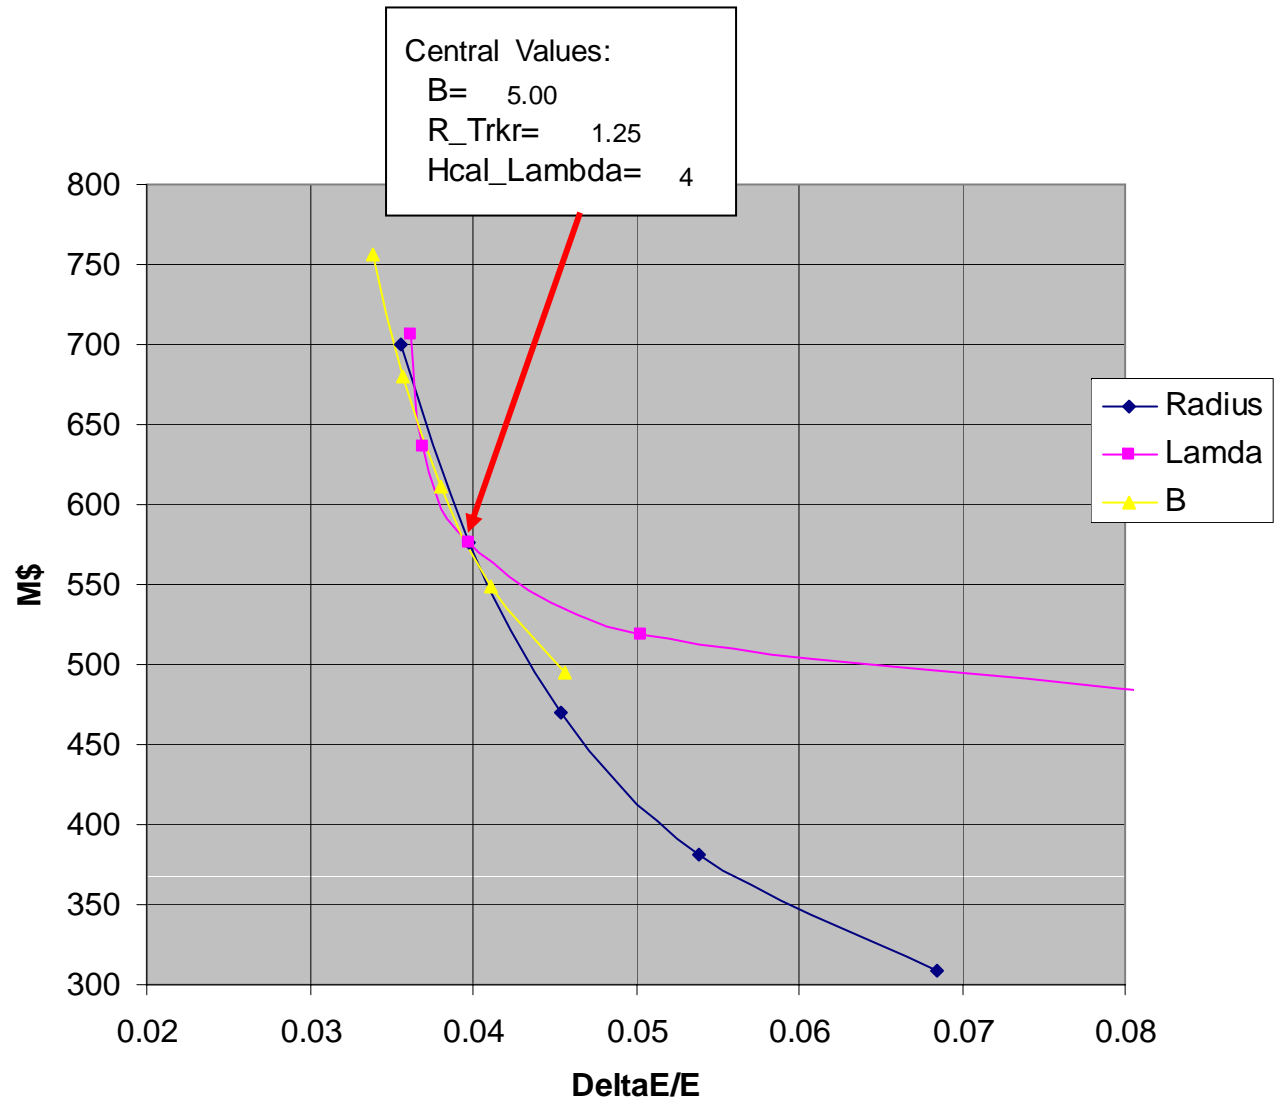

Cost vs PFA DeltaE/E for 180 GeV

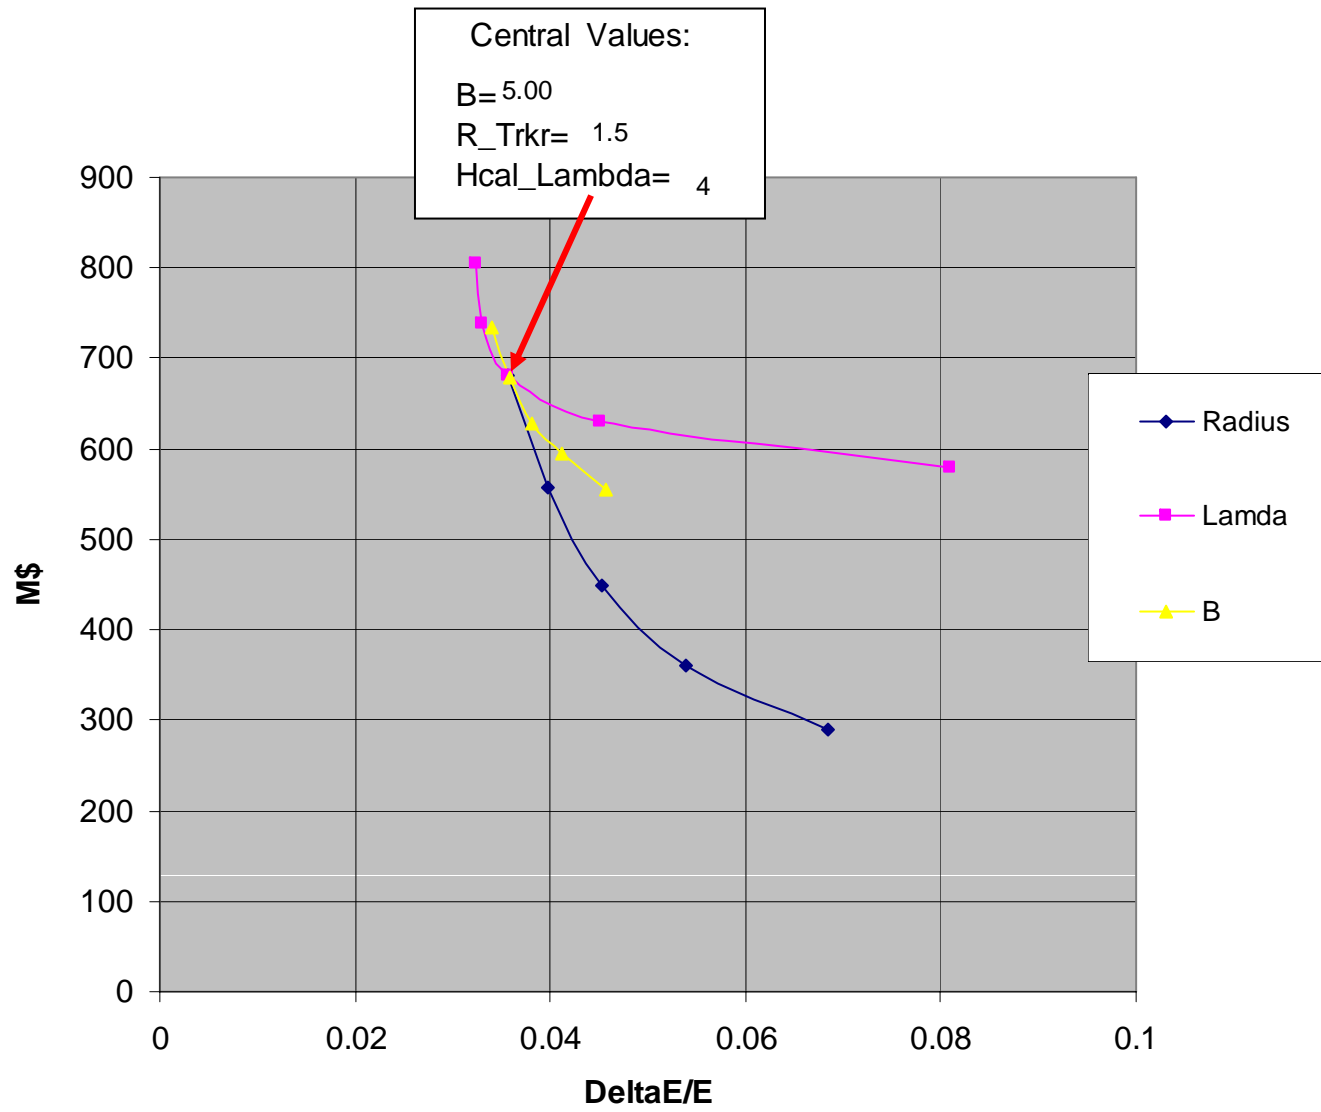

Cost vs PFA DeltaE/E for 180 GeV

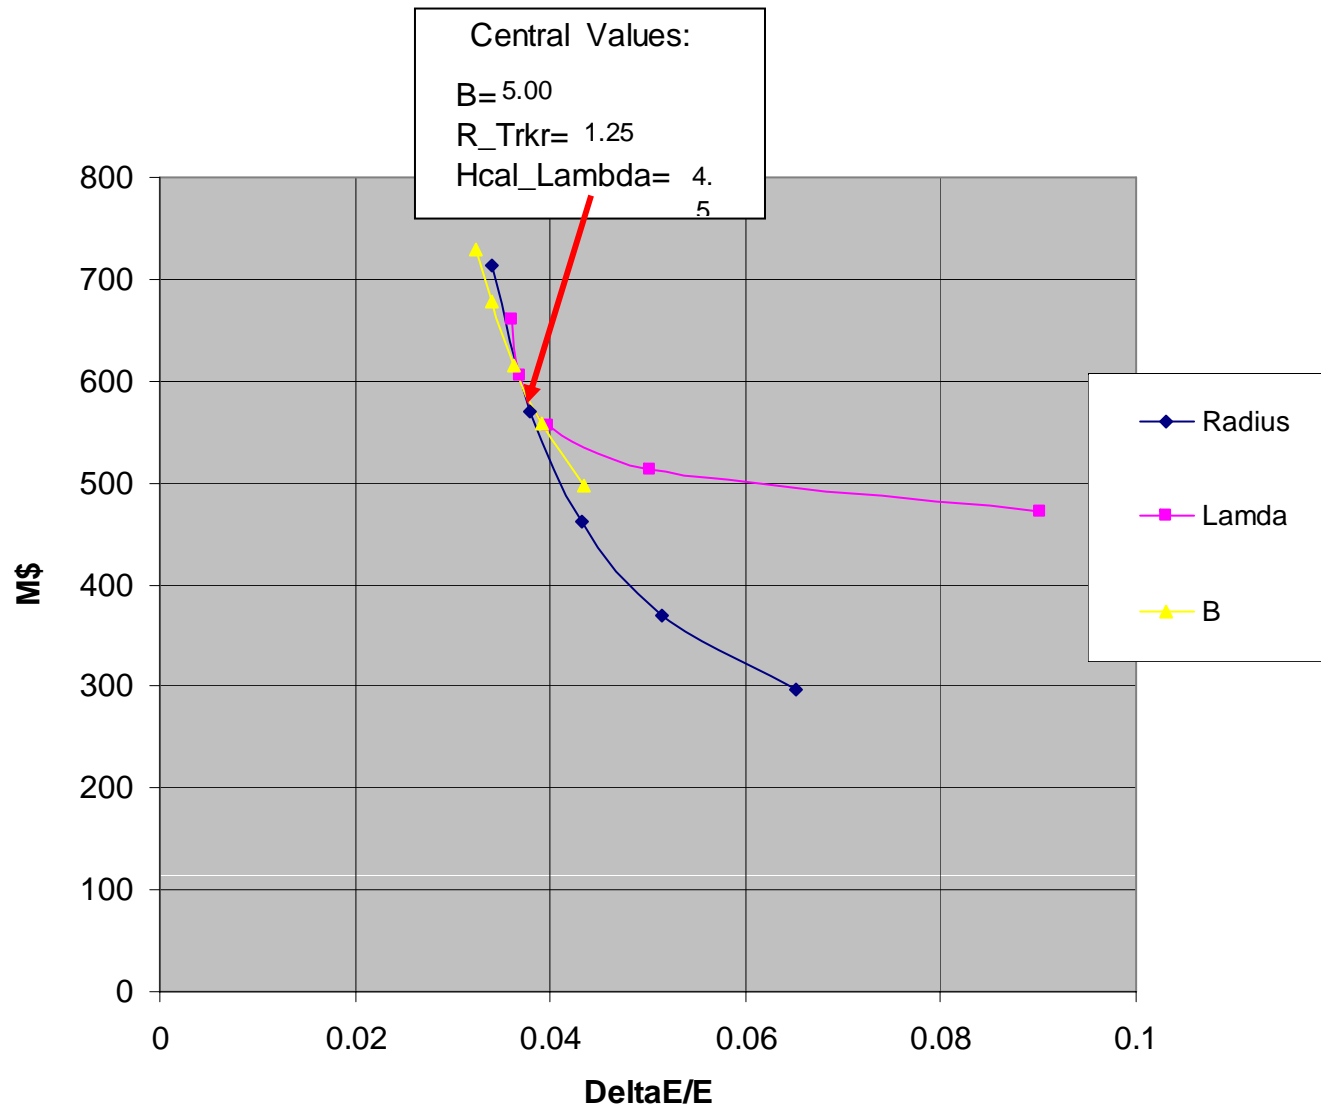

Comments

- Remember the caveats! Remember that it is a parameterization for scintillator - and we don't know if gas is better or worse, or needs more or less radiator.
- The indication is that SiD baseline does $\Delta E/E < 4\%$, and that 4.5 λ is somewhat more conservative without going cost crazy.
- It is probably technically unwise to push B up - 5T is enough of a test. Similarly, r can not go up much without the coil hoop stress being a problem.
- Considering costs, and momentarily believing Pandora, the SiD baseline may be quite reasonable. *But we desperately need to prove this.*
- *Critical SiD Pandora results soon - but not yet!!!*