

# Summary and Results of LCTW09

The authors ...

March 18, 2010

## Abstract

This note summarises the workshop LCTW09 held between the 3.11.2009 and 5.11.2009 at LAL Orsay. The workshop was dedicated to discuss the Linear Collider Detector Testbeam needs in the years 2010 up to 2013. The document underlines the rich and highly interesting R&D program of the detectors for the Linear Collider in the coming years. Large synergies were identified in the level of DAQ and software systems. Considerable synergy effects are expected from the establishment of Linear Collider detector beam lines at major centres like CERN and FNAL.

ILC beam structure .... conclusion should be part of abstract since important.

Assigned authors for this document are asked to see also IDTB07 document for reference (arXiv:0710.3353 [physics.ins-det]). Indicated page numbers are guidelines and can be (slightly) extended or reduced.

Process with `pdflatex`.

Figure 1 indicates how to embed a figure into the document

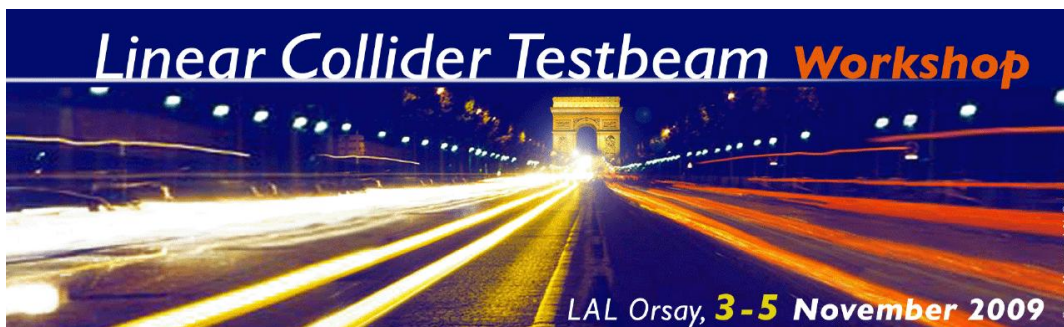


Figure 1: Logo of the Linear Collider Testbeam Workshop 2009.

If you would like to embed directly an eps-file please process with `pdflatex -shell-escape` such that the `epstopdf` script can be executed.

The Table 1 in Section 4 gives an example for a table.

## 1 Executive Summary (2 pages - R. Pöschl)

Testbeams are the first occasion for detector concepts to face the truth about their design, and an optimal opportunity to train young physicist on real data. Recently, 40 experts (two from Asia, five from North America and the rest from Europe) met at the Laboratoire de l'Accélérateur Linéaire (LAL) at Orsay to review the needs for testbeams for the R&D on detectors in the future. The goal of this workshop was to collect the needs and to coordinate the activities of the various collaborations active in the field: CALICE, FCAL and SiD groups on calorimetry, LCTPC on gaseous tracking as well as SiLC for the various silicon tracking

devices. Representatives of the current major test beam facilities, CERN, DESY and Fermilab, presented their sites and actively took part in the discussions. Many other facilities available in the world were discussed: J-Parc, IHEP Beijing, Tohoku, KEK in Asia, IHEP/Protvino, Dubna in Russia, and it was noticed that SLAC would restore test beams and create a new facility in its end station A by 2010. The successful testbeam efforts prior to the Letters of Intent (LOI) for detectors were reviewed followed by vivid discussions on what is needed to improve these testbeams for the next phase. This document covers the years 2010-2013 which to a large extent coincides with the preparation of the Detector Baseline Document (DBD) in which mature detector technologies are to be presented. The testbeam efforts have to support this goal. Large scale systems of all detector components are expected to be tested in this phase. The successful conduction of the testbeams is naturally vital for a well founded document. Apart from the fact that the detector developers have to be ready in time, the community has to make sure that enough beam time is available, in particular in the period 1/2011 - 12/2012 in which most of the activities described in this note can be anticipated. The needs of the LC detector community in terms of particles comprises low energy electron test beams as well as high energy hadron test beams. In addition to the beamlines itself, the Linear Collider Detector R&D requires specific equipment such as large bore high-field magnets (up to 6 T). Another important issue of the detector R&D is to find the optimal balance between high beam rates to conduct physics motivated studies and the fact that e.g. the readout electronics is primarily designed for low rates as in first approach expected at a Linear Collider. Given the limited time line and manpower situation the LC Detector community will establish a light coordination of the testbeam activities to foster synergies and avoid overlaps in terms of beam times and facilities.

## 2 Subdetector Testbeam Plans

### Subdetector Plans

#### 2.1 Calorimeter (3-4 pages - V. Boudry, J. Hauptman)

##### 2.1.1 Roman's notes during workshop

Groups and Tasks to be listed. CALICE. SiD Groups

- Analog Ecals: SiW Completion of phys.. Prot, towards tech. Protos need ILC beam-structure  
ScEcal One Layer to be integrated into SiEcal alveolar structure  
Physics Prototypes
- DECAL: Major plans with DECAL in 2012  
Telescope usage for calorimeters  
AIDA Microstrips for calorimeter surface
- US SiEcal kPix Chip, bump bonding, time line at hand?  
Testbeam Module – Time Line?  
LC-like time structure, SLAC beam  
Start in winter 2011  
FNAL/DESY?  
Together with HCAL

92% W much cheaper?

- HCALs  
GRPC - electronic boards for 3 chambers in 2010?????  
GRPC Testbeam plans beyond 2010? First PFLOW test with simple setup, **How to realise Setup for real PFA tests?**  
Micromegas as much planes as possible in 2010
- US RPC 400k channels full physics prototype in 2010.  
Stack ready in spring 2010. Testbeam program in 2010
- TCMT: Future plans, longer strips, need tracking system?
- AHCAL: Completed phys. prototype phase  
Calice testbeam much more than three calos, understood tracking  
Wish list!!!!  
Prototype 2012 (DESY, FNAL, LAPP????)
- muon systems, tests together with a Hcal
- Fcal

**DISCLAIMER: The following is a copy of the DESY-PRC report. Vincent and John should feel free to delete it and to replace it by their summary. In particular, the plans of the SiD Ecal, Fcal and muon R&D groups are entirely missing.**

### 2.1.2 CALICE plans

A recent overview of the details of the prototypes mentioned in this section can be found in [5].

### Physics Prototypes

The years 2010-11 will see the finalisation of the main physics prototype phase. A physics prototype of the DHCAL based on RPCs will be completed in the first half of 2010. As for previous testbeams including the AHCAL, there will be data taking in combination with the Si-W ECAL and the TCMT, as well as standalone DHCAL data taking. Including commissioning and calibration phases altogether 14 weeks of test beam time will be requested from FNAL. Within this 14 weeks, CALICE should be the primary beam user for about 8 weeks. The other 6 weeks can be spent with parasitic running or the setup of the experiment. The physics program to be conducted will be largely oriented on that which has been conducted in the corresponding data taking in the years 2006-09. In the combined running, the emphasis will be put on energy ranges in which it is expected to see signals in the electromagnetic part and the hadronic part (plus tail catcher) In the standalone running also low energy hadrons are to be collected as well as electrons. Priorities would have to be defined later on but the data which were already taken give good guidelines. It is also envisaged to replace a few layers of the DHCAL with GEMs as sensitive detectors. This may happen towards the beginning of 2011. This effort might face the constraint that due to customs regulations, the CALICE stage currently at FNAL is required to be shipped back to Europe in April 2011; in that case tests can be completed at CERN.

The one remaining detector which is yet to complete a physics prototype detector is the DECAL; this is expected to be achieved by 2012.

A new initiative has been started in order to study the properties of tungsten as absorber material, primarily for an HCAL at a multi-TeV collider, but possibly also for the ILC. In the versatile structure of the physics prototype the steel absorber plates can be replaced by tungsten plates. Tests with existing scintillator layers could start in 2011, tests with gaseous layers as they become available.

### **Technological prototypes**

The CALICE collaboration is entering a new phase of R&D in which readout technologies and mechanical designs do meet already many requirements of the operation in a detector for a Linear Collider. Several groups of the collaboration are already quite advanced and new full scale prototypes are expected towards the end of 2010. The finalisation of these prototypes will be preceded by a number of larger and smaller testbeam efforts which will allow for maturing the newly developed technologies. Examples for these test beam efforts are:

- Testbeams with 1 m<sup>2</sup> units of the technical prototype of the SDHCAL (both GRPC and micromegas variants). These units might already be part of the production of the entire prototype.
- For the analogue hadron calorimeter it is envisaged to have a smaller scale testbeam in 2009 to prepare for electronics commissioning followed by a so-called horizontal test in 2010 and a vertical test in 2011. This means the available equipment will be arranged to allow for the measurement of electromagnetic showers.
- The Si-W ECAL is planning to make tests with single ASU towards the end of 2010 in an electron testbeam.

It has to be stressed that the primary goal of these prototypes is to study technological solutions for the calorimetry at the ILC. The strategy for the coming years should take this into account. Here the main keywords are power pulsing and the limited depth of the buffers in the front end electronics which allow only for data taking rates of the order of 100 Hz during a spill. In addition to the pure technological issues a physics program is to be pursued. This physics program is derived from those of the physics prototypes, taking the new technical constraints into account. It requires the operators of testbeam sites to actively respond to the needs of the CALICE (LC) testbeam data taking at an very early stage. As it is foreseeable that potential high statistics physics runs will take a considerable amount of time, and this will require the deployment of remote control at the experimental sites.

A first large scale testbeam with a fully equipped technical prototype of an SDHCAL can be expected towards spring 2011. It is still to be clarified in what proportion this SDCHAL will be equipped with the two technologies under study, namely using GRPCs or micromegas as sensitive devices. This is currently pondered on the basis of experience gained with the two technologies by laboratory studies and during test beam campaigns of the year 2009.

Ideally, the SDHCAL will be joined by an Si-W ECAL technical prototype by end of 2011. The running of an AHCAL technical prototype alone and together with the Si-W ECAL technical prototype is to follow. During the year 2010 mechanical interfaces between the different detector types will have to be defined. More general year 2010 is to be used to integrate the detector components with the newly developed DAQ systems in order to provide an efficient data taking.

The program requires a high availability of testbeam areas. The CALICE management and the CALICE TB together with the corresponding ILC R&D panels will work out until

summer 2010 whether ILC detector R&D can occupy consecutively testbeam areas for a time of two or more years starting with the beginning of 2011. Such a high availability of testbeam areas would also allow for an easier conduction of smaller testbeam programs as for example with the DECAL, which has had a somewhat uncertain time scale due to funding issues in the UK. In addition a well functional infrastructure would facilitate the testing of a prototype for the electromagnetic calorimeter based on scintillating tiles (Sc-W ECAL) of which one layer can be expected towards the end of 2012. Finally, technological prototype layers with timing capabilities should also be used in a beam test with a tungsten absorber structure.

### **Summary on tentative sites and special Requirements**

The beam test campaigns for the physics prototypes will be conducted initially at FNAL in 2010 and continued at CERN in 2011. The natural preferred site for the beam tests to be conducted with the technological prototype is CERN since most of the R&D groups involved in these prototypes are based in Europe. As it is currently however difficult to predict fully the availability of the CERN facilities, FNAL remains a serious option for a test beam site. The prototypes of the CALICE collaboration will not need a dedicated ILC like beam structure. Rather it is desirable to obtain beams with a relatively long flat top with low intensity. Such a configuration would reply to the layout of the front end electronics which is designed for low occupancy. The validation of the power pulsing technique will however need the availability of a large bore magnet with a field strength between 3 and 5 T.

**General Question to all projects, plan for physics runs, are they are any?**

**Another General Question, where should the testbeam be conducted**

### **2.2 Silicon Tracking (4 pages - M. Vos, R. Lipton, T. Nelson)**

Groups and Tasks need to be listed. Dedicated table  
SiLC and "Vertex Groups"

- Spider ?  
Question: Target for high density tracks?
- SiLC Beam Test  
Larger prototypes  
Combined Testbeams with calorimetry mid-2010 2011?????  
What kind of beams?
- KAPTAN
- Silicon Tracking  
Convenient use of EUDET telescop, EUDET success needs to be continued  
Mimicked or 'real' Power pulsing  
"Jetty" Environment would be very desirable

### **2.3 Gaseous Tracking (2 pages - T. Matsuda)**

Physics at the International Linear Collider (ILC) or the Compact Linear Collider (CLIC) will require a detector of high precision. A tracking system of the detector has to achieve a high momentum resolution  $\delta(1/p_t)$  of a few  $10^{-5} (\text{GeV}/c)^{-1}$  [1]. This resolution surpasses by 10 times the best momentum resolution achieved by the experiments at LEP. The tracking system should also provide a high tracking efficiency down to a few GeV/c to ensure a good

jet-energy measurement by the Particle Flow Algorithm (PFA) in an environment of high beam-induced backgrounds.

To meet with these requirements, a large Time Projection Chamber (TPC) with using Micro Pattern Gas Detectors (MPGD) is proposed as a central tracker of the International Large Detector (ILD) [2]. The ILD TPC is to be located in a large superconducting solenoid of 3.5 T. It measures each track at 220 space points with an  $r\phi$  spatial resolution of  $100\mu\text{m}$  or better in the whole drift volume of 2.2 m long. This performance of TPC is only achievable with the MPGD technology [3,4]. At this moment we consider three candidates of MPGD detectors; Bulk MicroMEGAS with resistive anode readout, GEM with narrow pad readout, and, in a somewhat longer time scale, a digital TPC with Ingrid TimePix or a semi-digital TPC using GEM readout by TimePix.

### 2.3.1 TPC R&D by the LC TPC collaboration

The LC TPC collaboration has been carrying out R&D of the MPGD TPC for ILC (ILD) in three stages;

1. Demonstration phase.
2. Consolidation phase.
3. Design phase.

At each phase for the last several years, we have performed a multitude of beam tests.

In the demonstration phase (2004-2007) a basic evaluation of the properties of the MPGD gas amplification was made, demonstrating that the requirements for the linear collider (ILD) could be met. For an example, we have shown through a beam tests of small TPC prototypes that the  $r\phi$  space resolution of  $100\mu\text{m}$  could be

possible both by MicroMEGAS with the resistive anode readout and GEM with the narrow pad readout [?].

In the current consolidation phase (2007- ), we have been successfully operating a TPC Large Prototype 1 (TPC LP1) at a low energy electron 5 GeV/c test beam at DESY, T24-1. The goals of the LP1 beam test are to confirm the results from the demonstration phase for a larger scale TPC [?], and to show that the excellent momentum resolution is actually achievable for the LC TPC. In 2010 we plan to perform beam tests with the LP1 endplate which will be equipped with four to seven MPGD modules, and we have been developing a new TPC tracking code for non-uniform magnetic field. In this phase, in addition to the development of the different MPGD TPC readout modules, we also study basic engineering issues for the LC TPC. Good examples are the construction of a thin LP1 field cage and the development of a low noise, high-density TPC pad readout electronics using S-ALTRO.

And we are now entering the design phase (2010- ) where we work for a basic conceptual design of the LC TPC.

### 2.3.2 LC TPC R&D and Beam Tests in 2010-2012

In the design phase of 2010-2012, beside the overall design of the LC TPC, we have two major hardware R&D issues; (a) a design of a TPC endplate of the thickness of 15% radiation length or less, and (b) a choice of the ion gating device. We have started our study of a light mechanical structure of the TPC endplates, and also the so-called advanced end-plate TPC modules with power pulsing and an efficient cooling such as the two-phase CO<sub>2</sub> cooling. We plan to build a new LP1 endplate structure mounted with the advanced TPC modules with S-ALTRO (and also modules of the digital TPC), and test it in a test beam for the ILD-DBD

(Detail Baseline Design) in 2012. For this R&D phase we have not yet a full scope of funding. In 2011, we plan to modify the magnet PCMAG to make it a superconducting magnet without liquid He supply. The modification will take about 6 months.

### 2.3.3 Test beam before 2012 and the ILC beam structure

In the current prospect of our R&D budget and support, and in the situation where the availability of a higher energy hadron test beam in 2011 seems to be not very clear, we plan that our TPC LP with PCMAG stays at the T24-1 beam line at DESY until to the end of 2012. We may perform some optional and small scale beam tests at high-energy hadron test beams and in a higher magnetic field using small prototypes.

At the DESY test beam, there is no plan to simulate the ILC beam bunch structure. We plan to test the power pulsing of the advanced TPC modules with the beam without the ILC bunch structure. We think that we do not really need beam to test the power pulsing. The functional test of the power switching of the advanced TPC modules in a higher magnetic field will be necessary. To demonstrate how our ion gating device works, we may need a proper device, either a laser or a flash lamp, to simulate beam backgrounds at ILC according to the beam bunch structure.

## 2.4 Data Acquisition (2 pages - M. Wing)

In general, a given ILC sub-detector develops its own data acquisition (DAQ) system to suit its needs, depending on a multitude of technical issues such as data rates, number of channels to read out, etc.. The DAQ system consists of the hardware—various electronics boards using various standards to get the data from the detector head to a PC—and software to control the flow of data from the detector and commands to the detector. The requirements can then lead to a DAQ system which is conceptually new or is strongly based on an existing system in use for another detector; both of which are reasonable approaches. This therefore results in very different systems when developed in isolation as is the case for several of the ILC sub-detectors; a brief review of some of the systems is given below.

Were sub-detectors to continue in isolation a programme of verification in a beam-test, then bespoke development is a sensible approach. However, should any sub-detectors wish to have combined beam-tests with another sub-detector, then more thought and planning is needed. Therefore any issues with regard to DAQ systems depend crucially on whether combined beam-tests of several sub-detectors will happen. Alternatively, given extra resources such as those which may be provided by the AIDA project, a common approach to DAQ systems could be pursued now such that a final system for a final ILC detector will be easier to manage and integrate when it becomes a reality. Careful planning now could lead to significant benefits, with reduced risk, in the future. As a DAQ system serves a given sub-detector or detector, it is not a driver for individual or common beam tests which is dictated by the detectors themselves. As a separate goal, more generic aspects of DAQ system can be developed for future sub-detector use which will save on effort in the long-run.

### 2.4.1 Example DAQ systems

#### CALICE DAQ

Most of the focus for the new CALICE DAQ system has been on the hardware development and firmware to control it [6, 7]. The system consists of several layers of concentrator cards to get the data from the detector head to a PC and storage. Given that the CALICE programme includes several different types of calorimeter, the first layer of electronics needs to convert

the sub-detector-specific data into a generic structure which is then passed to the next layer. As such, the hardware system needs to be suitably generic and could in principle be used for various sub-detectors and not just calorimeters. The DAQ and slow control software are less advanced. Initially the approach was to use existing software designed to cope with large-scale systems; the programmes DOOCS [8] and XDAQ [9] have been used so far. In light of possible combined beam-tests, a survey of available software is being performed.

### **EUDAQ system for vertex and tracking detectors**

A DAQ system developed to read out the EUDET [10] pixel telescope has been developed [11, 12]. The telescope is a relatively small-scale detector and is read out via a VME-based hardware system. Major effort has been invested in writing a flexible DAQ software framework, called EUDAQ, which has been successfully used for the pixel telescope in numerous beam tests. The code is written in C++, is freely available and was fully developed by the main authors. The software has been used by several other groups when performing beam tests in conjunction with the pixel telescope. Indeed the LC-TPC collaboration are using it for their work on a TPC sub-detector [13]. Any new sub-detector just needs to write a producer and the EUDAQ authors should be able to integrate on the time-scale of a few days.

#### **2.4.2 Towards a common DAQ system**

As sub-detectors will at some point be used together, say as a complete detector slice-test, the data will have to be merged at some point. The extremes are : to develop one data acquisition system, both hardware and software, which is able to read out all sub-detectors; or for sub-detector DAQ systems to all be developed in parallel and data merged at the final opportunity when it is stored. The former is unlikely given the various logistical problems whilst the latter is undesirable, potentially leading to wasted effort and a lack of coherency in the final data samples. The reality will lie somewhere in between with some common hardware used and even more so, common software. From the examples given above, the CALICE hardware could in principle be used for other sub-detectors, although this would have significant costs associated to it. The EUDAQ software may be a viable solution for CALICE calorimeters, although this needs to be demonstrated given its current use for a much smaller system. As DAQ systems for all sub-detectors are relatively well advanced, adapting to common solutions will require extra effort and will require e.g. the funding of AIDA to make it possible.

Taking a middle ground on common aspects of a DAQ system, some of the questions and issues which need to be addressed are listed below. These should be addressed if the AIDA project is funded.

#### **Common Hardware**

Although the hardware used for the CALICE calorimeters and the CAPTAN [14] project are relatively generic and could be used for other sub-detectors, it is unlikely that such an approach is possible. However, there are various common items amongst the various sub-detector groups which could be used :

- Hardware which provides a trigger or a clock such as the Trigger Logic Unit [11] or Clock and Control Card [6] developed for the pixel telescope and CALICE calorimeters, respectively, could be used by all sub-detectors. These would uniquely identify each trigger.
- A proposed “Beam Interface Card” [7] could be used to monitor beam conditions taking data from e.g. scintillators, hodoscopes, etc.. Its exact form is to be designed.



## Common Software

There are a multitude of DAQ software frameworks developed for previous or existing experiments. A critical review of these needs to be done :

- Large software frameworks such as XDAQ, DOOCS, TANGO [15], etc. have been developed with large-scale, diverse apparatus in mind. Presumably they then have the necessary functionality and flexibility to provide the framework for the ILC sub-detectors. This needs investigation and the various software compared;
- The EUDAQ software has been shown to work successfully with a number of different sub-detectors. However, its efficacy for reading out large systems such as the CALICE calorimeters, with thousands of channels, must be verified;
- Information needed to decide on the nature of the read-out path is the data volume, zero suppression, compression, data format etc.;
- It is generally agreed that all data should be converted into the common ILC offline software format, currently LCIO.

In summary, commonality between the DAQ systems of the various sub-detectors should be sought at an early stage so as to ease integration later. Should the AIDA project be funded, this will give the necessary support of this effort in which a critical review of current DAQ hardware and software is carried out leading to a more coherent framework for future ILC detector beam tests.

### **2.5 Software (2 pages - F. Gaede, N. Graf)**

Large potential for collaboration

LCIO and need for flexibility in startup phase at testbeams

Feedback detector realism into Full detector simulation.

**Development of Geometry interface.**

**Event Display**

**Grid Resources - Need for support**

Communication/remote control tools to save manpower, foster collaboration and to reduce travel expenses.

## **3 Sites (4 pages - F. Sefkow, J. Yu, K. Kawagoe, V. Vrba**

### **3.1 CERN**

Two areas North and East, main area North/SPS area

- Semi permanent beam lines for LHC experiments
- LHC experiments by LHC scientific coordinator
- Negotiation on beam equipment
- irradiation facility
- RD51 semi-permanent beamline
- CERN usually very crowded, limited SPS availability due to LHC start

Semi permanent ILC beamline at CERN, oral request asap formal by mid-2010 to get a beamline by middle of 2011.

### 3.2 DESY

- High availability, but small room for improvements
- 1-6 GeV energy, 2 KHz rate
- Very flexible, 4 areas, arrangement on short notice possible

A loose Brain Storming by C.Hast (SLAC) and N. Meyners (DESY): XFEL and ILC timestructure (XFEL is little ILC). Potential for a hadron testbeam at DESY (could be established around 2015, maybe not realistic).

### 3.3 FNAL

- Spill options, Ping extraction
- microstructure, 7 bunches separated by 400 ns
- 2 Pixel tracker
- PiD with TOF system

2010–2013, down 2012

### 3.4 Asian Facilities

Low energy facilities

- J-Parc, currently unused, 1-1.5 GeV/c
- IHEP Beijing, not before 2011, low energy electrons
- Tokoku available
- KEK ATF Shutdown 2010-2012

### 3.5 SLAC

Restore Testbeams at SLAC

New testbeam area in Endstation A

### 3.6 Medium Sites

- IHEP/Protvino, e between 1-45 GeV,
- Dubna, neutron beams, good neutron yield

### 3.7 Dedicated request for ILC timestructure (2 pages - Input by Subdetector Groups, summary by R. Pöschl)

Do we need beams with ILC beamstructure???? If yes to what extend? To be identified latest by 15/3/10.

## 4 Common Beamlines and Combined Testbeams (2 pages - R. Pöschl, G.Fisk)

The establishment of beamlines mainly dedicated to Linear Collider Detector R&D has been an important topic at the workshop. In general it is felt that the establishment of those beam lines would lead to important synergies. This leads from practical issues like "knowing where the trigger counters are" to the possibility to install infrastructural components like communication services at the beam test sites. The main advantages of common beam sites are listed in the following

- The use of common beam line will allow the sharing of experience with the usage of a beam line. Hence, the data taking can be much more efficient as the sometimes tedious period of getting up and running can be much shorter.
- The existence of a common beam line would foster the development of common DAQ interfaces which after all would also facilitate the data taking a lot. This can go as far that manning of shifts can be shared by different detector types, simply because the interfaces to the detectors are familiar. This in turn saves travel money and man power. Clearly, it has to be made sure that in particular young students can still be trained at test beam sites.
- A common beam line might facilitate a situation in which one subsystem is the main user while another one acts as a secondary user to e.g. take calibration data or for long term studies. A general familiarity with a given beam line would render such a configuration much easier and allows for flexible switches of between detector components if circumstances demand it.
- A common remote control system may allow for data taking even if no expert of a subsystem is on-site. This clearly has to be coordinated with safety aspects of the various beam test sites.
- A common beam test site would naturally lead to a mutual better understanding of other detector components. The fact that a common DAQ system at an early stage may facilitate the system integration in the real detector is also not to be underestimated.

Having said this the next question would be how to organise the establishment of Linear Collider beam lines. In principle there are two possibilities

- Request directly a beam line at CERN and at FNAL and organise the usage of the beam line via the detector R&D panel itself. At the current stage it is however unlikely that such a request could be fulfilled.
- Placing beam requests to sites in a coordinated way: Beam requests are sent by the spokespersons of the detector R&D collaborations at given dates in a year. By that several requests from the same community arrive at the same time which may naturally lead to an assignment of only a few beam lines to the requests. The placing of the requests to the sites will be preceded by a brief meeting of the spokespersons in order to have an idea of schedules which could then also be streamlined. The step to a common request is not that long in that case. A short meeting on coming beam test activities should become a standing item at each LC workshop.

*For the final document, these two thoughts should be reduced to one proposal. From what I see the second one looks very viable since it is lightweight and relatively easy to turn into reality.*

All beam test efforts should be monitored by a light monitoring system. In practice, this can be a simple date base where the groups enter the date and the purpose of the test as well as the beam line they use. This is a simple mean to facilitate communication beyond different detector system. It is very light weight and easy to implement at any computing center (FNAL, DESY, CERN, CC IN2P3).

Another question is whether the community should plan for combined testbeams, i.e. combining different detector technologies. The workshop could not identify a clear project of a major combined testbeam for the period 2010-2013. There are however occasions at which a combination at a smaller level seems to be feasible. Calorimeter for example testbeams needs very often a good point resolution. This requirement is very much met by the EUDET Telescope. It could however be imagined that such a task can be realised by a Silicon tracking device conceived for Linear Collider Detectors

Project	2010/2	2011/1	2011/2	2012/1	2012/2	Site
Calo	xx <b>CERN</b> <b>FNAL</b>	xx	xx	xx	xx	<b>CERN</b> <b>FNAL</b>
Special Needs	?	?	?	?	?	?
Gas/TPC	xx <b>DESY</b>	xx	xx	xx	?	<b>DESY</b> CERN/FNAL
Special Needs	?	?	?	?	?	?
SiTrack	x CERN FNAL Other	x	x	x	x	CERN FNAL Other
Special Needs	?	?	?	?	?	?

Table 1: The table indicate the envisaged testbeam activities until the end of 2012. The symbol – means "no activity planned", The symbol **x** means "Test of small units can be expected", The symbol **xx** means "Large Scale Testbeam planned". Bold face letters means "preferred site".

## **5 Conclusion, Outlook , Recommendations and Requests (1-2 pages - R. Pöschl, All)**

Main question to detector community 1) What requests do we have 2) How make optimal use of wealth of Testbeam facilities, care for optimising occupancy of beam lines Section might contain e.g. the request to FNAL to maintain the test beam lines open in 2012.

## **6 Appendix**

Activities and Timelines

## **References**

- [1] “*First results from electron data with the CALICE tile AHCAL prototype at the CERN test-beam*”, CAN-002.
- [2] F. Simon [CALICE], “*Track Segments in Hadronic Showers: Calibration Possibilities for a Highly Granular HCAL*”, arXiv:0902.1879 [physics.ins-det].
- [3] “*Track Segments in Hadronic Showers in the Analogue Scintillator Tile HCAL*”, CAN-013.
- [4] M. Thomson, “*Particle flow calorimetry*”, J. Phys. Conf. Ser. **110**, 092032 (2008).
- [5] The CALICE Collaboration
- [6] M. Wing, “*Calorimeter DAQ status*”, EUDET-Memo-2009-27.  
URL : <http://www.eudet.org/e26/e28/e42441/e70539/EUDET-MEMO-2009-27.pdf>
- [7] D. Decotigny, “*CALICE DAQ & testbeams : status and perspectives*”, presented at LCTW09, November 2009, Orsay, France.  
URL : <http://ilcagenda.linearcollider.org/conferenceDisplay.py?confId=3735>
- [8] URL : [doocs.desy.de](http://doocs.desy.de)
- [9] URL : <https://svnweb.cern.ch/trac/cmsos>
- [10] URL : [www.eudet.org](http://www.eudet.org)
- [11] D. Haas, “*The EUDET Pixel Telescope Data Acquisition System*”, EUDET-Report-2009-03.  
URL : <http://www.eudet.org/e26/e26/e27/e50991/eudet-report-09-03.pdf>
- [12] D. Haas, “*The EUDAQ Data Acquisition for the JRA1 Pixel Telescope*”, presented at LCTW09, November 2009, Orsay, France.  
URL : <http://ilcagenda.linearcollider.org/conferenceDisplay.py?confId=3735>
- [13] M. Killenberg, “*DAQ for LC-TPC*”, presented at LCTW09, November 2009, Orsay, France.  
URL : <http://ilcagenda.linearcollider.org/conferenceDisplay.py?confId=3735>
- [14] R. Rivera, “*CAPTAN : Compact and programmable data acquisition node*”, presented at LCTW09, November 2009, Orsay, France.  
URL : <http://ilcagenda.linearcollider.org/conferenceDisplay.py?confId=3735>
- [15] URL : <http://www.tango-controls.org/>