

EMCAL RESOLUTION STUDIES AND UPDATE



Jason Barkeloo
J. Brau, A. Steinhebel, E. Meyer, J. Carlson
University of Oregon



OUTLINE





- KPiX
- Reminder of What Has Been Done
 - Where I started on the project
 - Test Beam Simulation and Comparison to KPiX data
 - How we start applying these to the full detector model
- Current Geometry Studies
 - Effects on Resolution
- Beginning to Look at Simulated Events


PARTICLE FLOW CALORIMETRY



- SiD has been designed to use Particle Flow Calorimetry to measure all final states with precision
- We expect excellent jet energy resolution
 - Measure charged momenta with tracker, neutral energies with calorimeters
 - Requires very fine segmentation
- An “Imaging ECAL” is a crucial part of the design
 - Silicon-Tungsten based calorimeter is being developed for a high granularity ECAL
 - KPiX ASIC for readout of silicon pixels

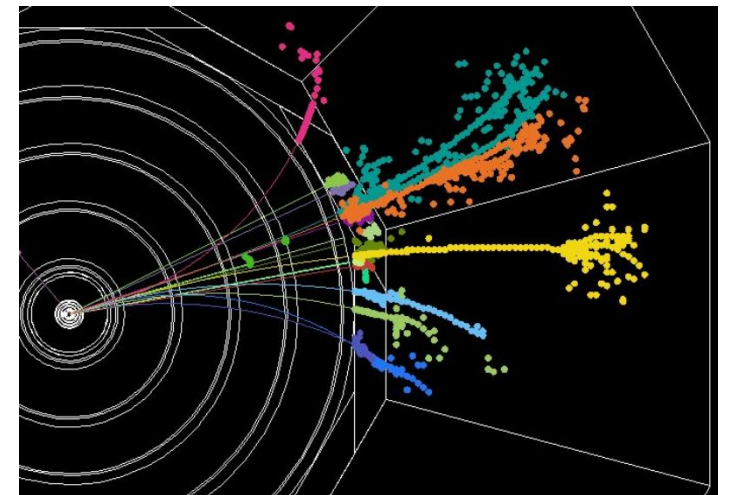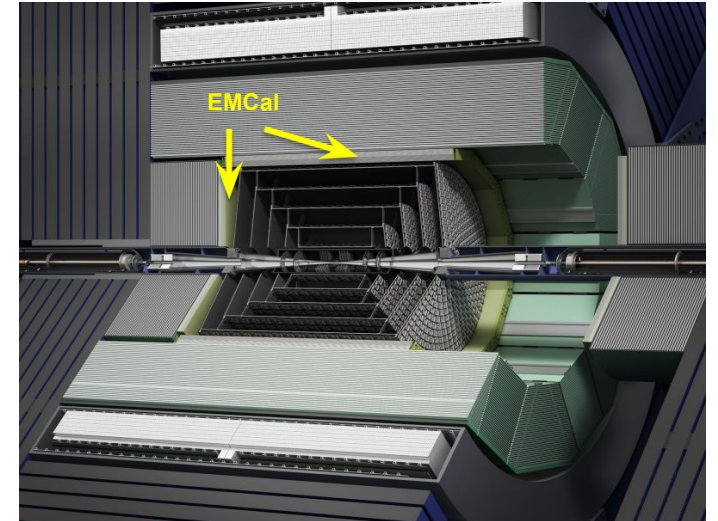

KPIX


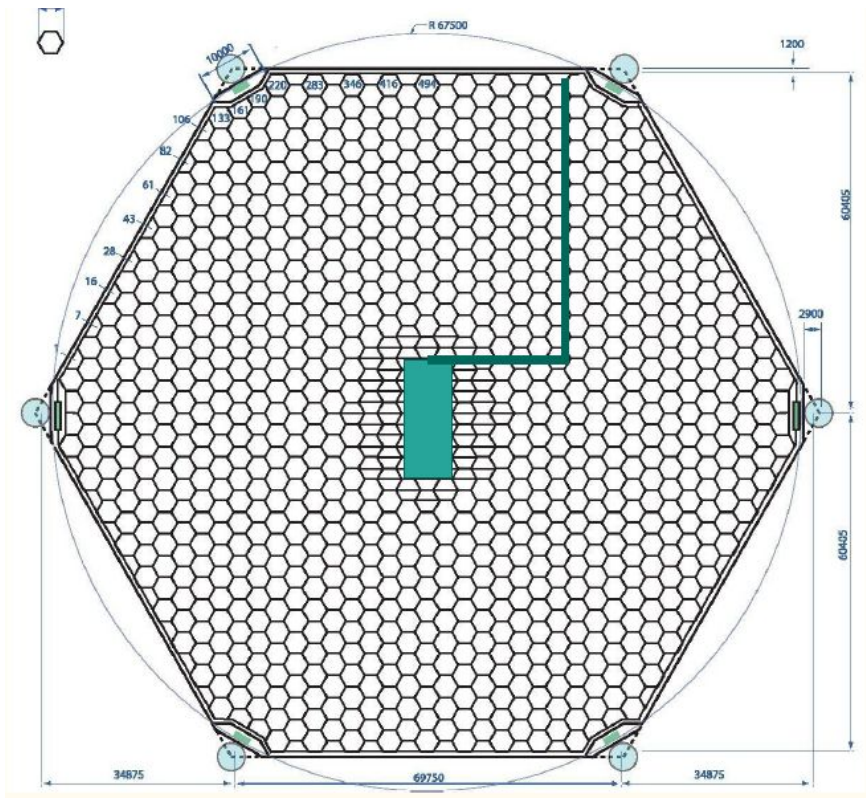


- 6 inch wafers
- 1024 13mm^2 pixels
- Readout and cable are bump-bonded directly to the sensor
- Test beam studies have happened with an initial version of this KPiX sensor design
- Will come back to the geometry and its effect on resolution measurements

TEST BEAM STUDIES



- Small 9 layer stack was placed into SLAC test beam
- Sensor issues have been found and change the design going forward
 - Cross Talk, Dead Pixels, ...
- Many electron events were seen that we can analyze and compare with simulation to improve understanding of the system
 - Resolution, Identification (how well we can tell how many electrons are in an event)

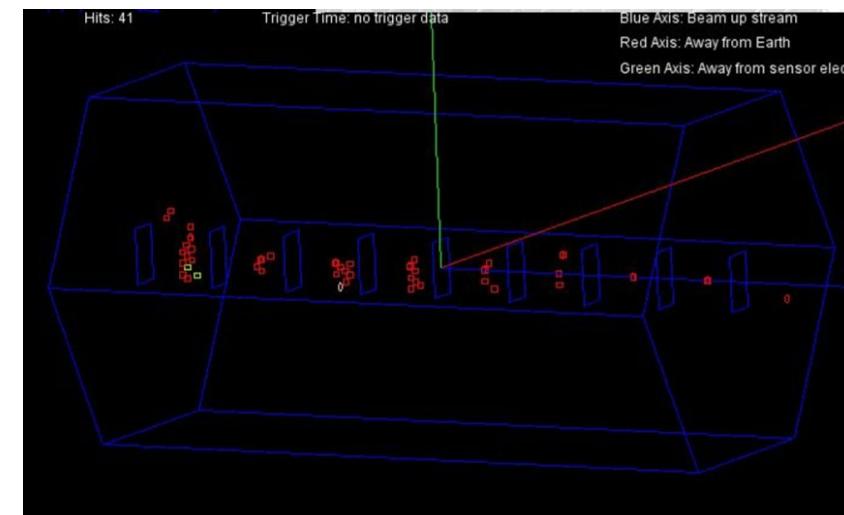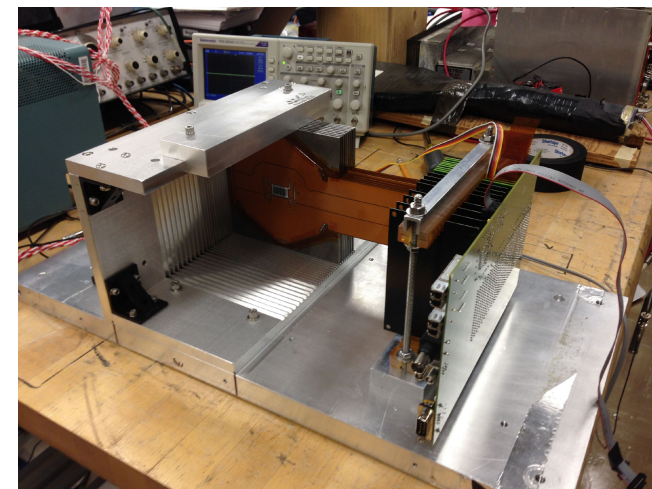


TEST BEAM STUDIES

GEANT4 COMPARISON TO DATA



- Geant4 Simulation created of 40x40cm plane of alternating Si (320 μm) and W (2.5mm, $5/7 X_0$)
 - 40 (thin W) layer detector simulated, only include 9 to match test beam stack for comparisons sake
 - Electrons fired at origin of various energies (in particular 12.1 GeV, test beam energy)
 - Want to try to match test beam running conditions


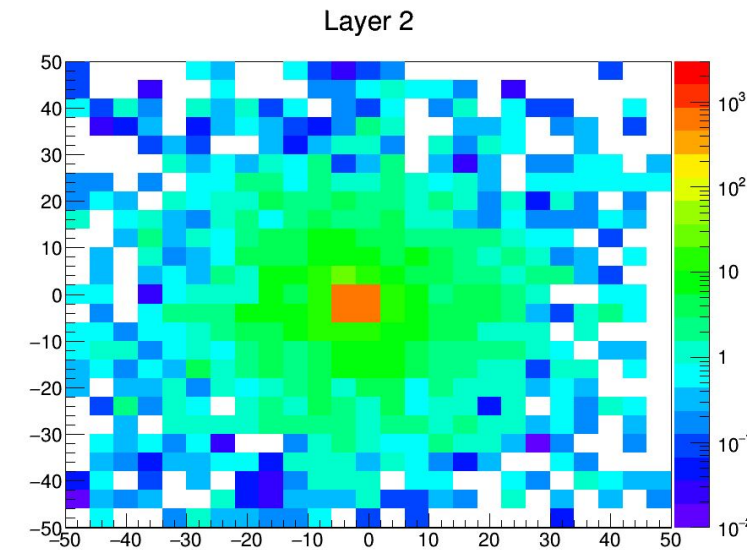


COMPARISONS (CONT.)



- Attempted to model distribution of electron multiplicity and errors in test beam
 - 10% pixels randomly removed from each layer
 - Poisson distribution of simultaneous electrons per event used $\langle n \rangle = 0.8725$
 - Shifted from central area (more densely pixelated, also test beam was shifted away)
 - Match hit to KPiX pixel location

- Upstream layer
- Two overlaid runs

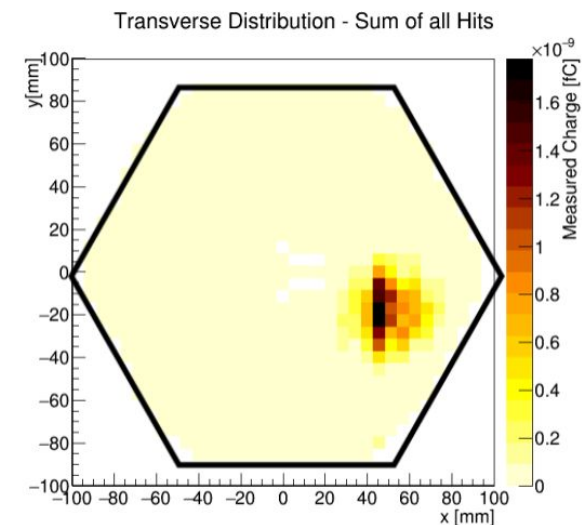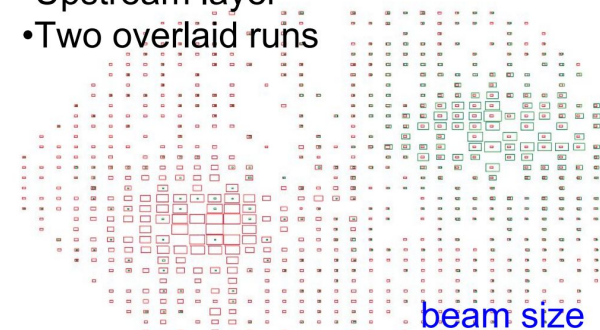


COMPARISONS (CONT.)



- Excellent agreement to test beam data.
- Couldn't remove all of the low E shoulder during test beam cleaning (lots of ~0fC hits)


Total Measured Charge per Cleaned or Simulated Electron Events ($6X_0$)

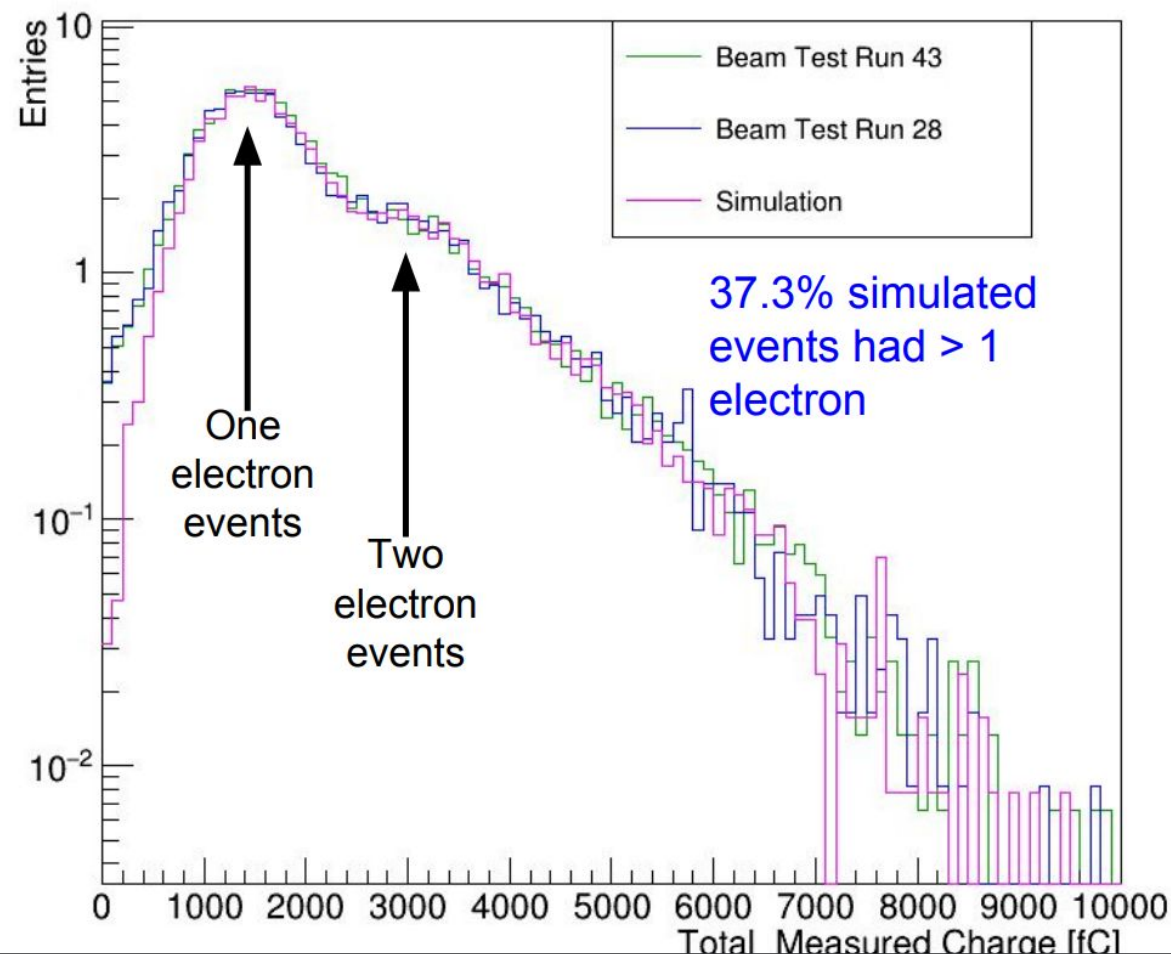

COUNTING ELECTRONS




Total Measured Charge per Simulated Electron Event

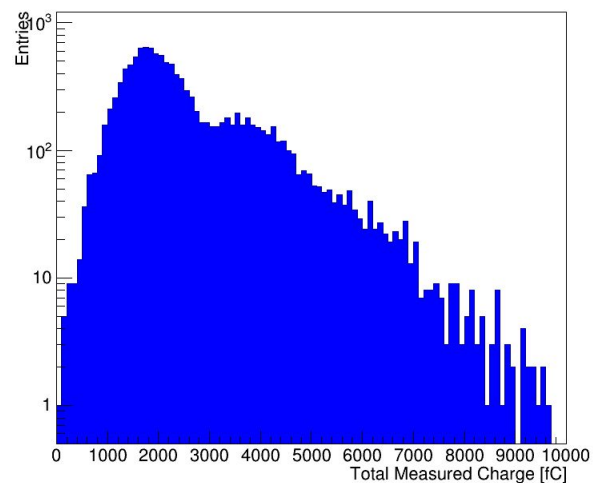


- Algorithm used to count the number of electrons in the event based on energy distributions throughout the detector.


Total measured Charge After Cleaning

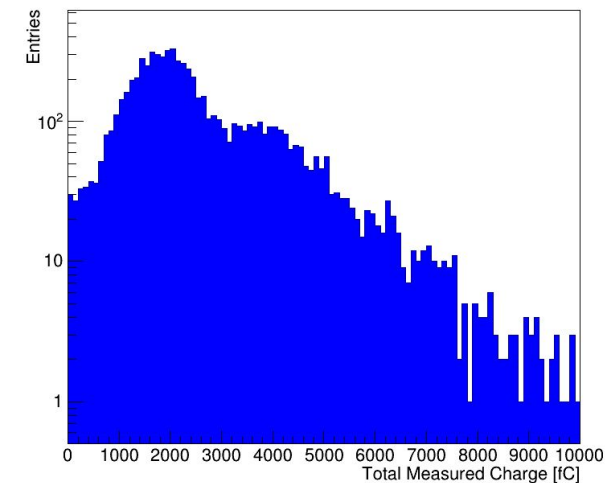


Electron Events - Simulation Truth

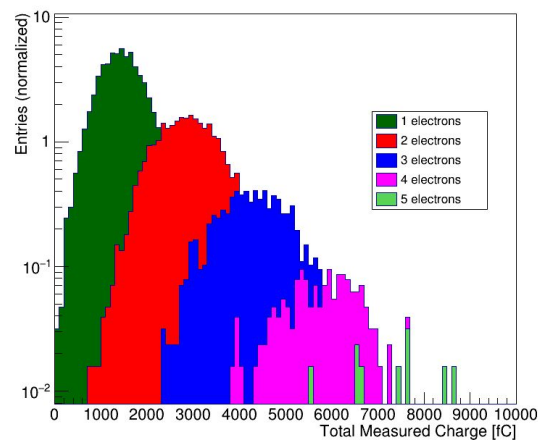

Electron Events - Simulation Counted

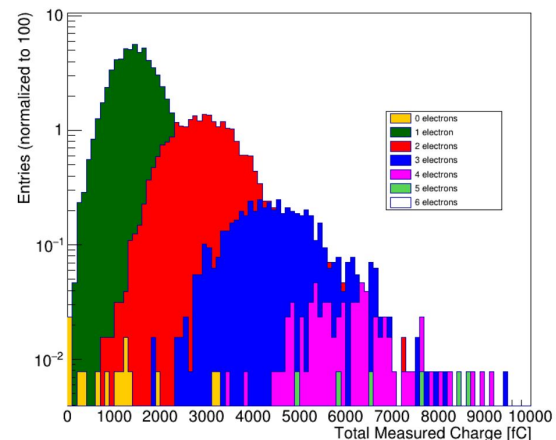


Electron Events - Test Beam Counted

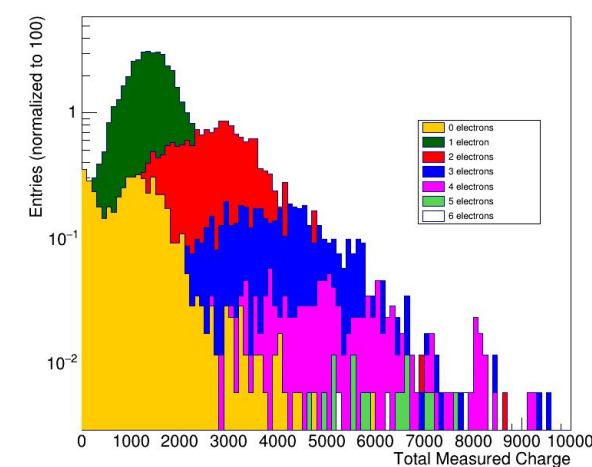


COUNTING ELECTRONS (CONT.)




Counting of 2-Electron Simulated Events

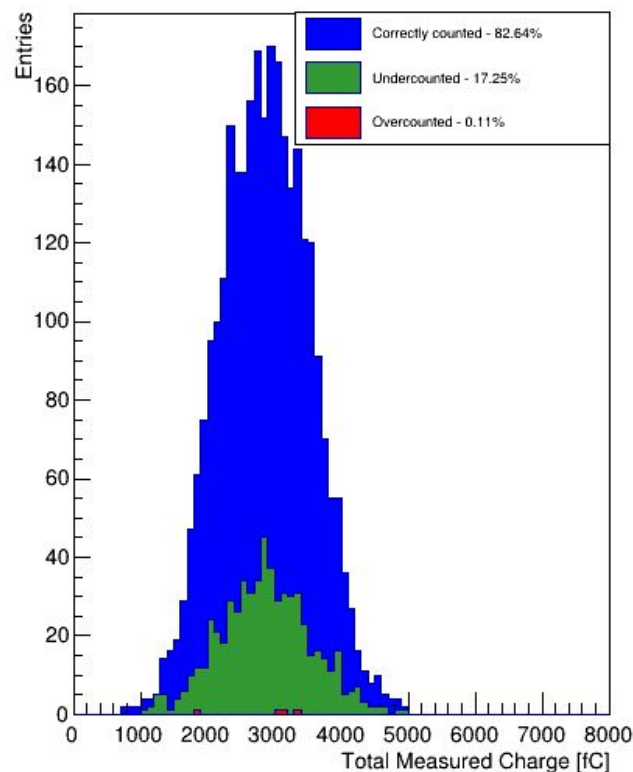

Counting of Simulated 2-Electron Events by Separation

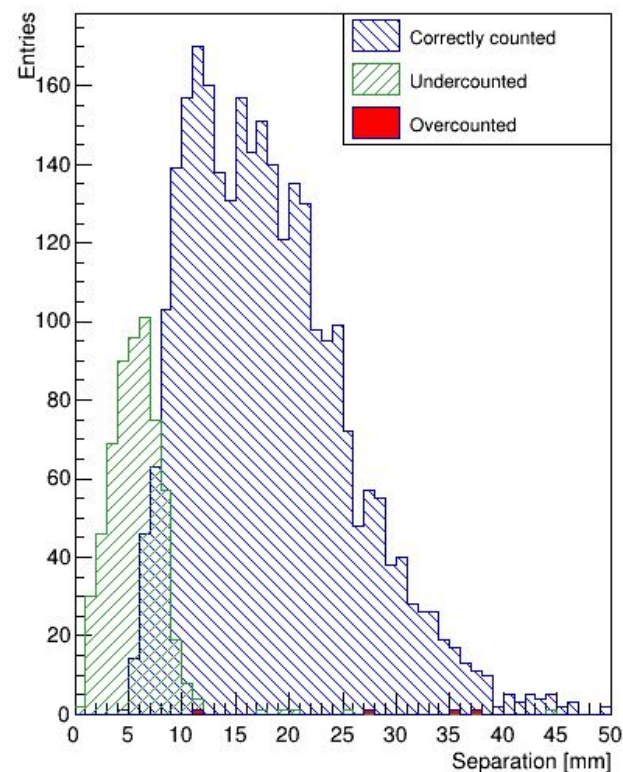


Simulated 2-Electron Event Counting Efficiency

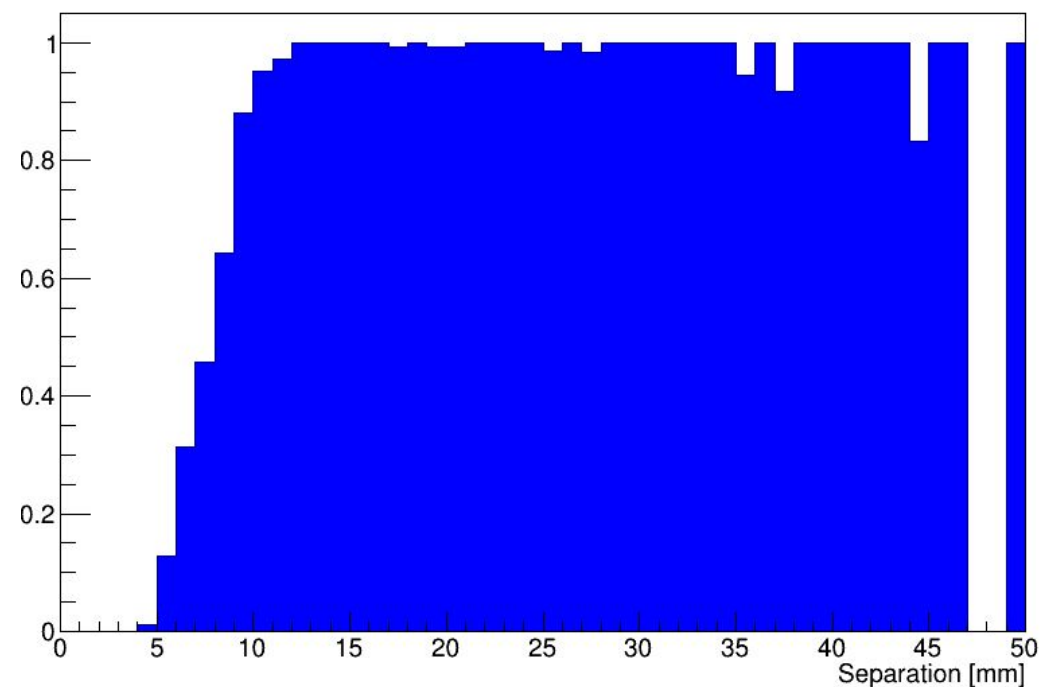

No field, just simple detector simulation

ECAL GEOMETRY AND ITS EFFECTS


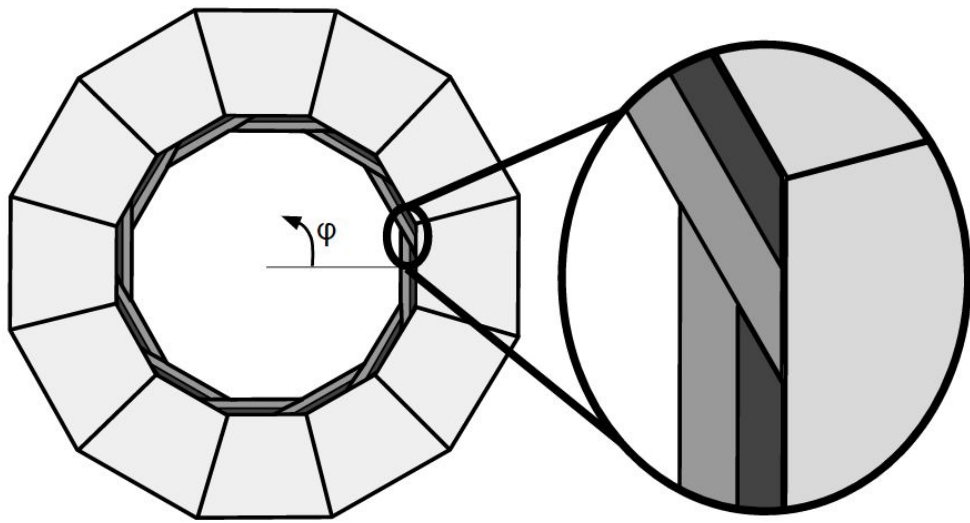


20 layers 2.5mm W


10 layers 5mm W

30 gaps 1.25mm w/pixel sensors

$29 \chi_0$

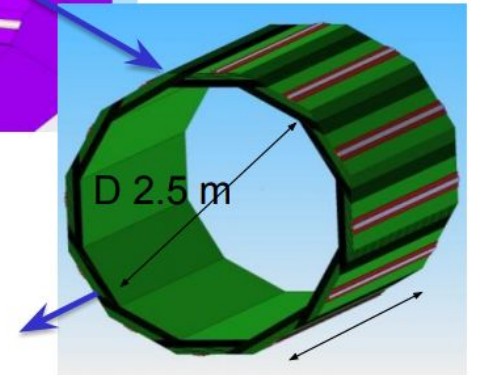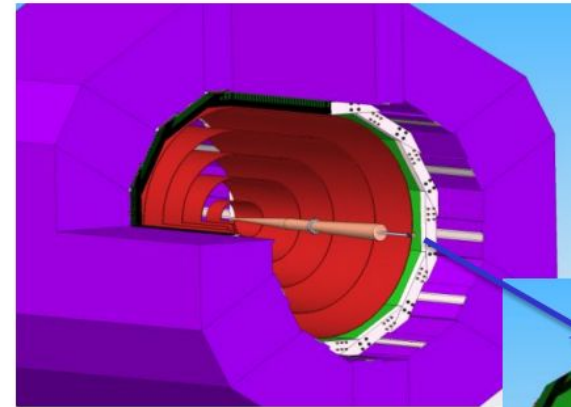


L 4.36 m



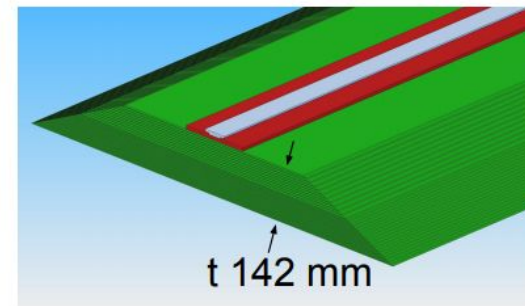


t 142 mm

GEOMETRY EFFECTS

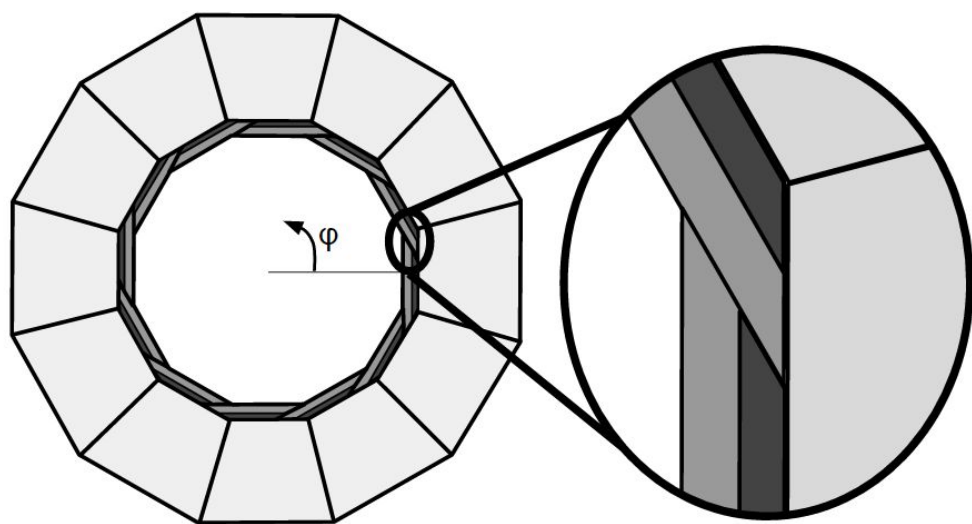

Leakage into HCAL in overlap region increases due to less material, phi dependent

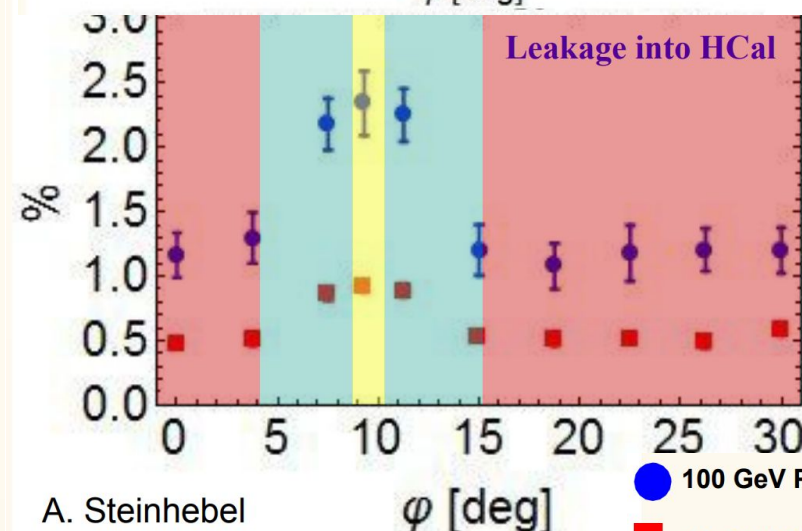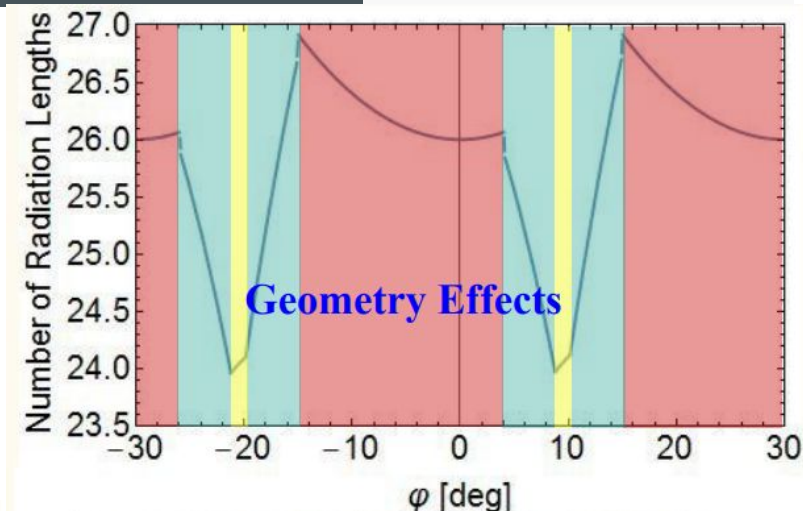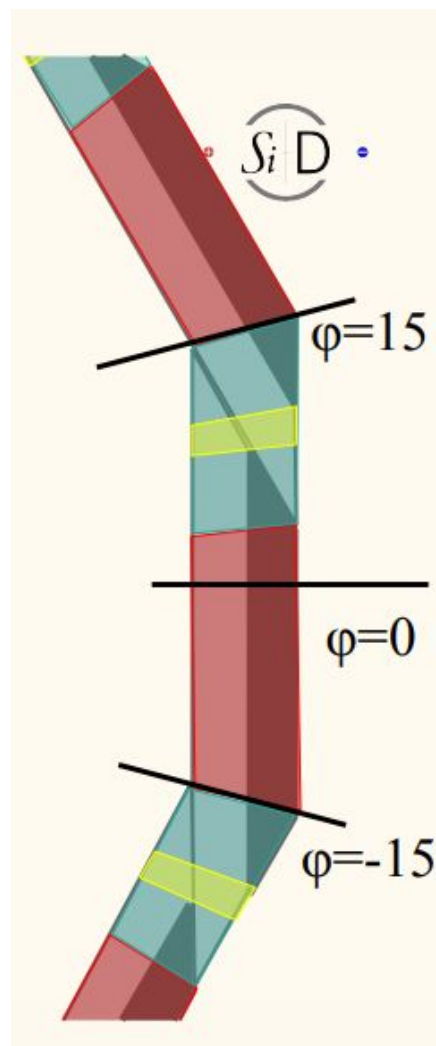


A. Steinhebel

● 100 GeV Photons


■ 10 GeV Photons

RESOLUTION EFFECTS FROM GEOMETRY

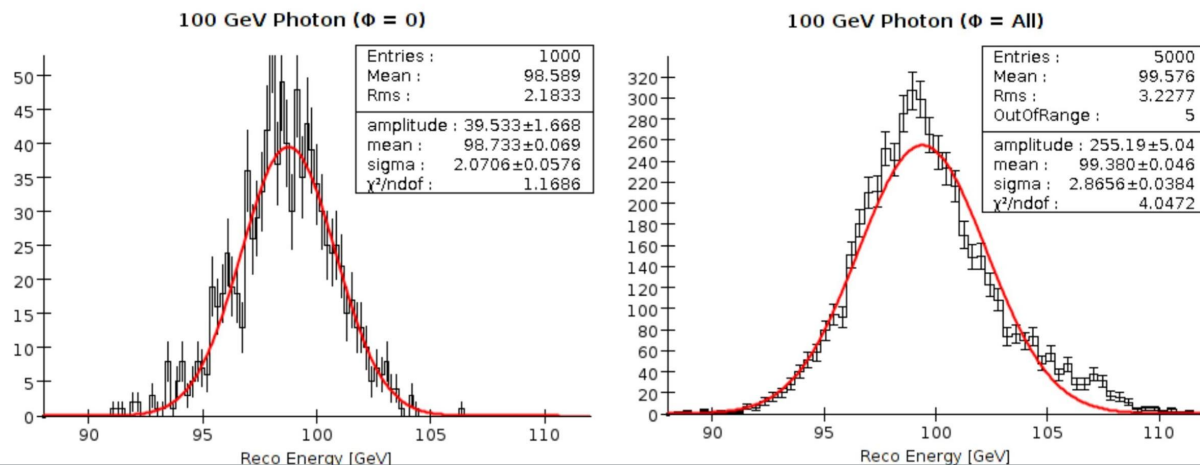

Previous resolution study (Da An, et al. 2014) using 100 GeV photons in sidloi3.

- $\phi = 0 \rightarrow \text{Resolution} \sim 21\%/\sqrt{E}$
- $\phi = \text{All} \rightarrow \text{Resolution} \sim 29\%/\sqrt{E}$

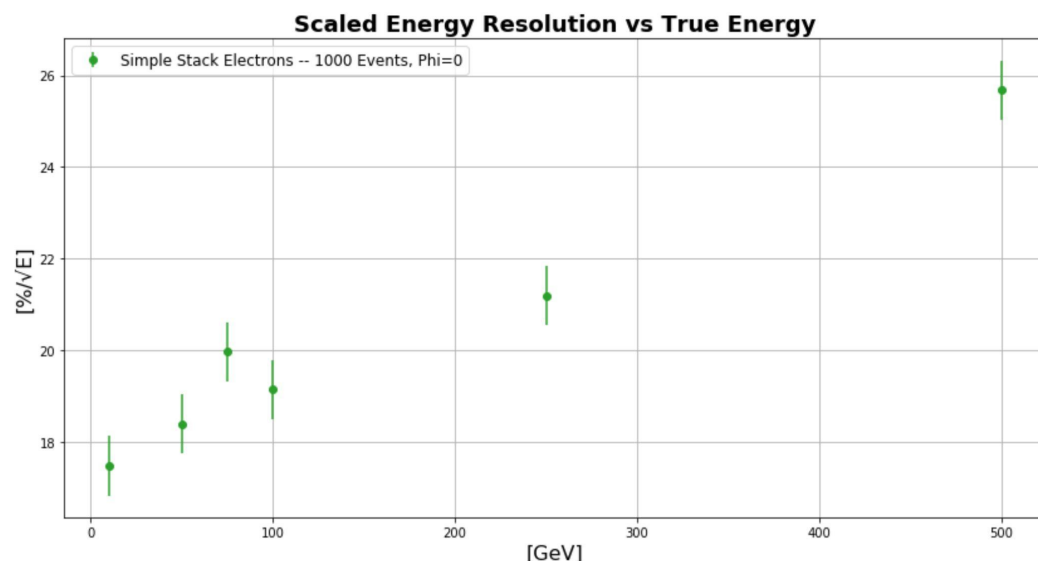


Resolution study using 10, 50, 75, 100, 250, and 500 GeV electrons using Simple Geant4 Stack Simulation

- For lower energy e^- (< 100 GeV), Resolution much closer to design expectation ($17\%/\sqrt{E}$)

NOTE:



Sum of Raw Detector Hits, SiD Electrons and Photons (2000 Events, Random Phi)

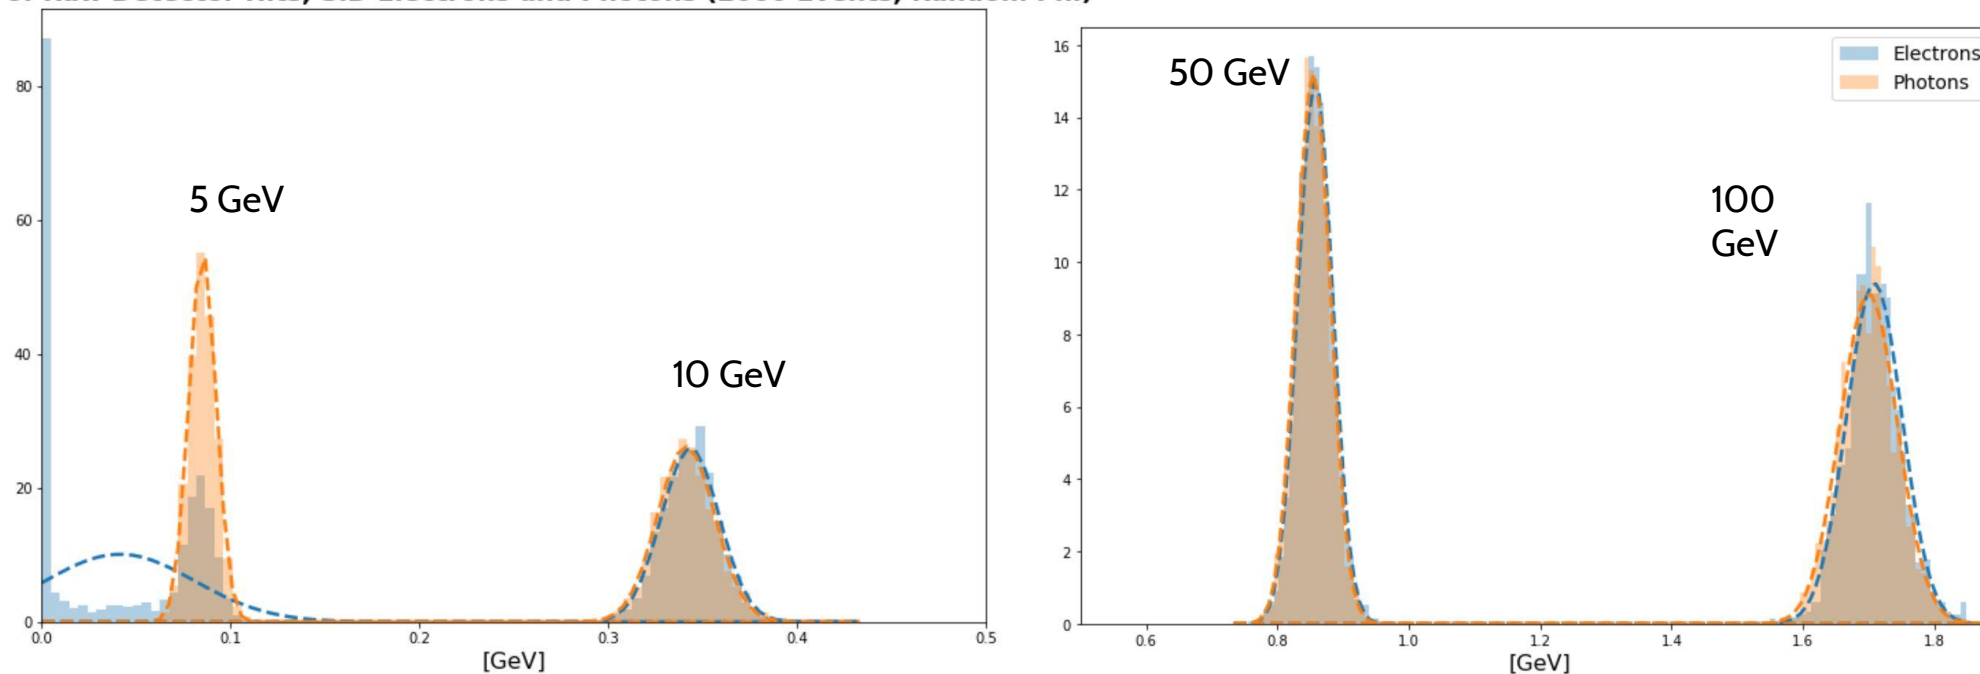


- Use cone width $\phi \pm 0.2$ rad constraint on hit locations (avoid backscatter)
 - ϕ determined from incident MC particle, not actual hits in detector
 - Ignore 5 GeV electrons in resolution plots, B-field effects \rightarrow shower gets missed with ϕ constraint

COMPARISONS



Scaled Energy Resolution vs True Energy

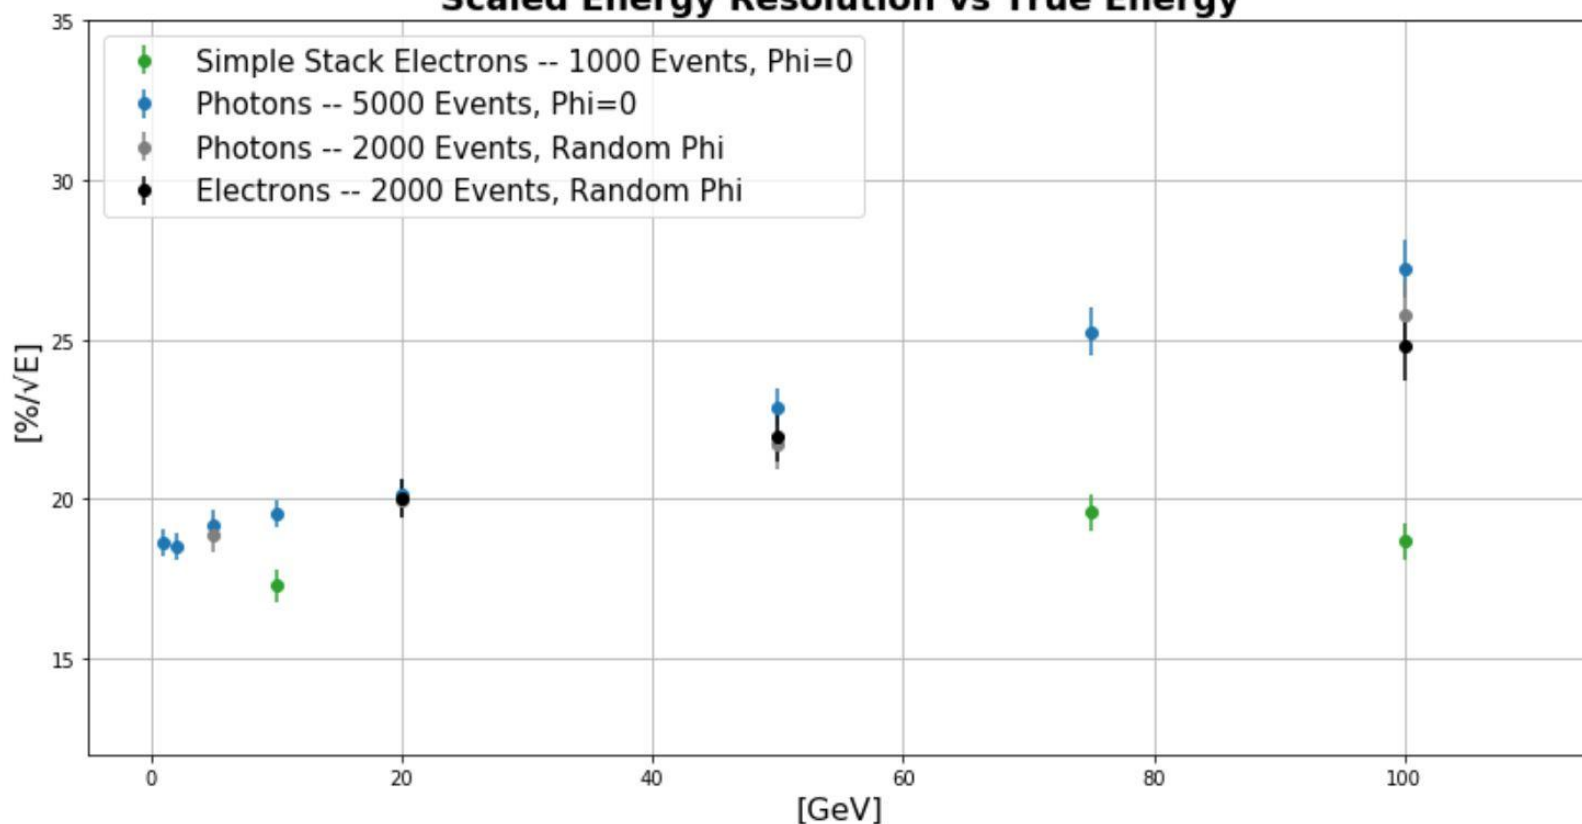


Discrepancies

- SiD resolution degrades much faster than the simple stack resolution
- 100 GeV SiD photons for $\phi = 0$ have $\text{Res} \sim 28\%/\sqrt{E}$ compared to $\sim 21\%/\sqrt{E}$ from previous sidloi3 study
- $\phi = \text{All}$ 100 GeV SiD photons have slightly better resolution than previous sidloi3 study; $\sim 26\%/\sqrt{E}$ compared to $\sim 29\%/\sqrt{E}$

CONFIRM SIMPLE STACK BEHAVES AS EXPECTED



Scaled Energy Resolution vs # Thin Layers

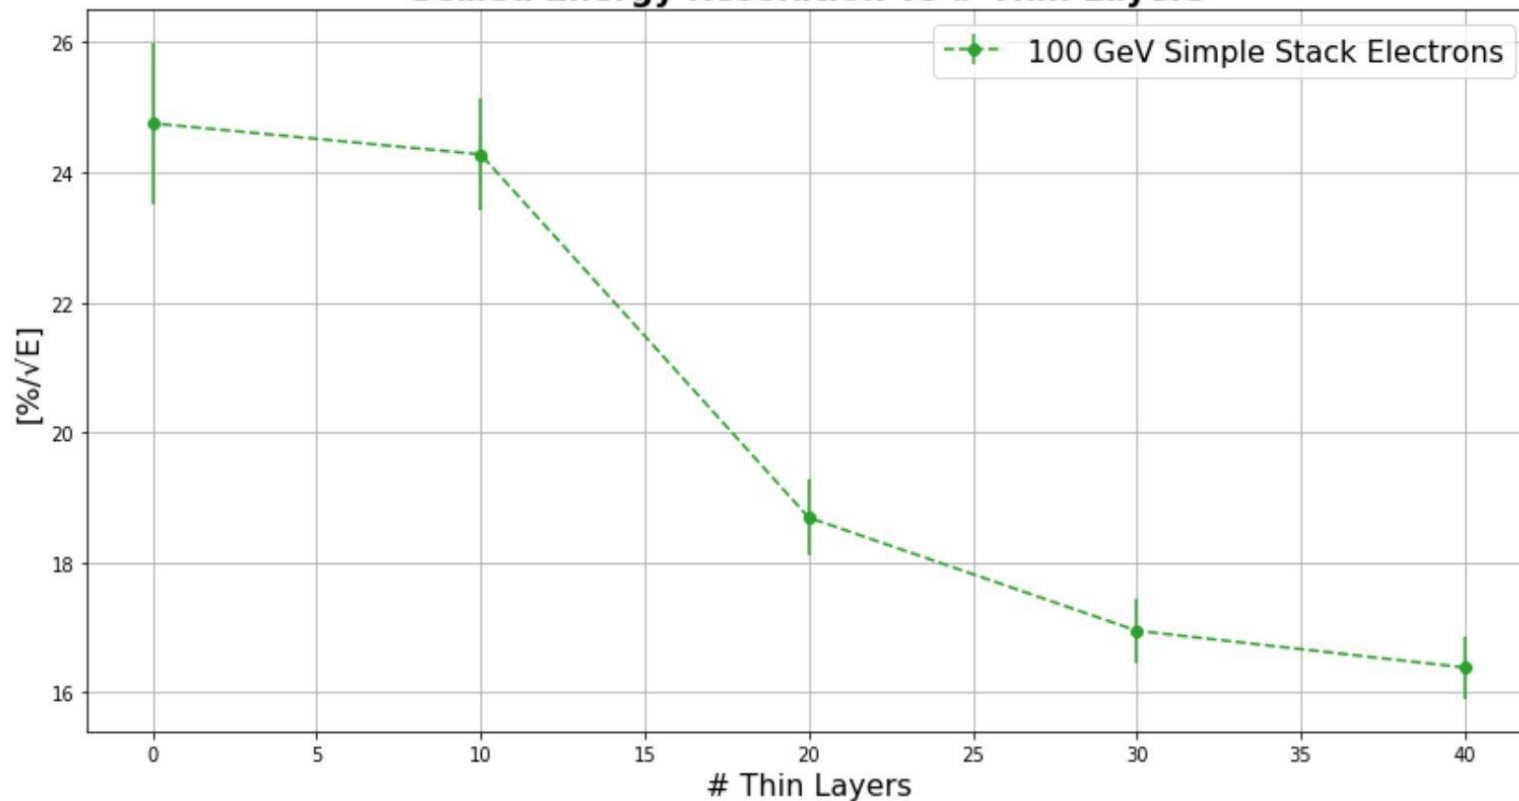

Vary the number of thin and thick layers for simple stack electrons


- $\# \text{Thick Layers} = (40 - \# \text{Thin}) / 2$
- Expected resolution of 40 thin $\sim 17\%/\sqrt{E}$
 - measured $16.6\%/\sqrt{E}$
- Expected resolution of 0 thin layers to degrade by $\sqrt{2}$ ($\sim 24\%/\sqrt{E}$)
 - measured $25\%/\sqrt{E}$
- **Conclusion:** simple stack behaves as expected

*Note: Simple stack absorbers are pure W


SIDLOI3 RESULTS



100 GeV Photon ($\phi = 0$)

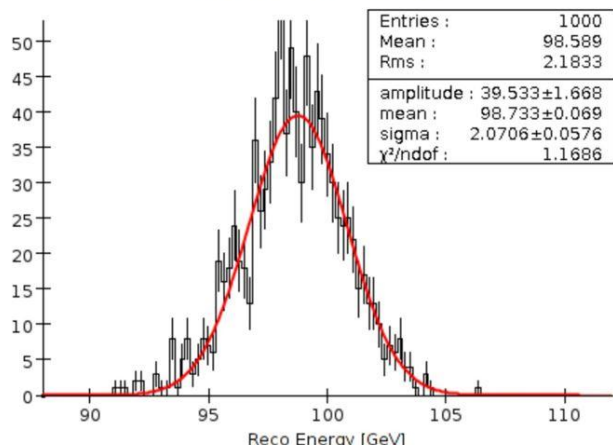

100 GeV Photon ($\phi = \text{All}$)

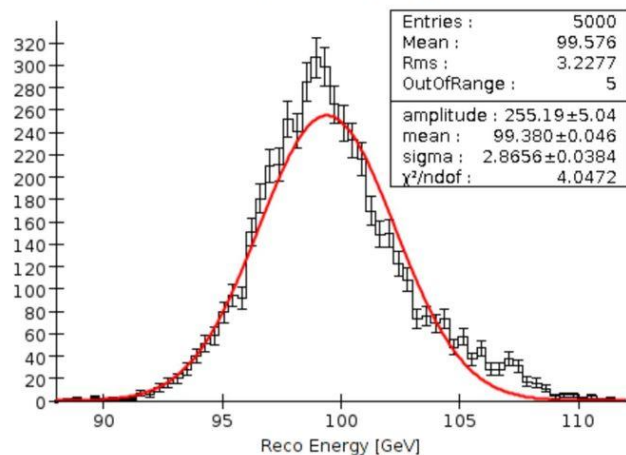


Large difference between $\phi = 0$ and $\phi = \text{All}$

← Previous study
(Da An, et al.)

Current study →
(what is used on following
resolution plot)

Sum of Raw Detector Hits, sidloi3 100 GeV Photons (1000 events)

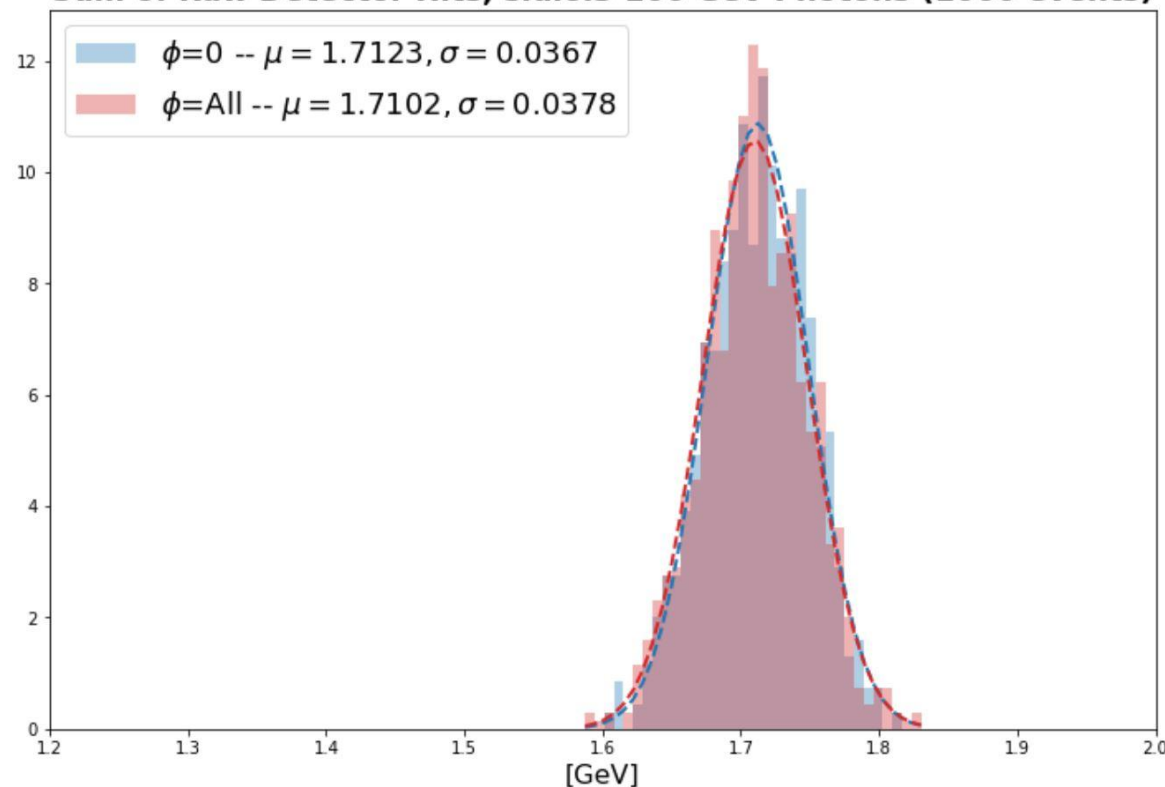


Small/negligible difference between $\phi = 0$ and $\phi = \text{All}$

SIDLOI3 RESULTS CONTINUED



Scaled Energy Resolution vs True Energy

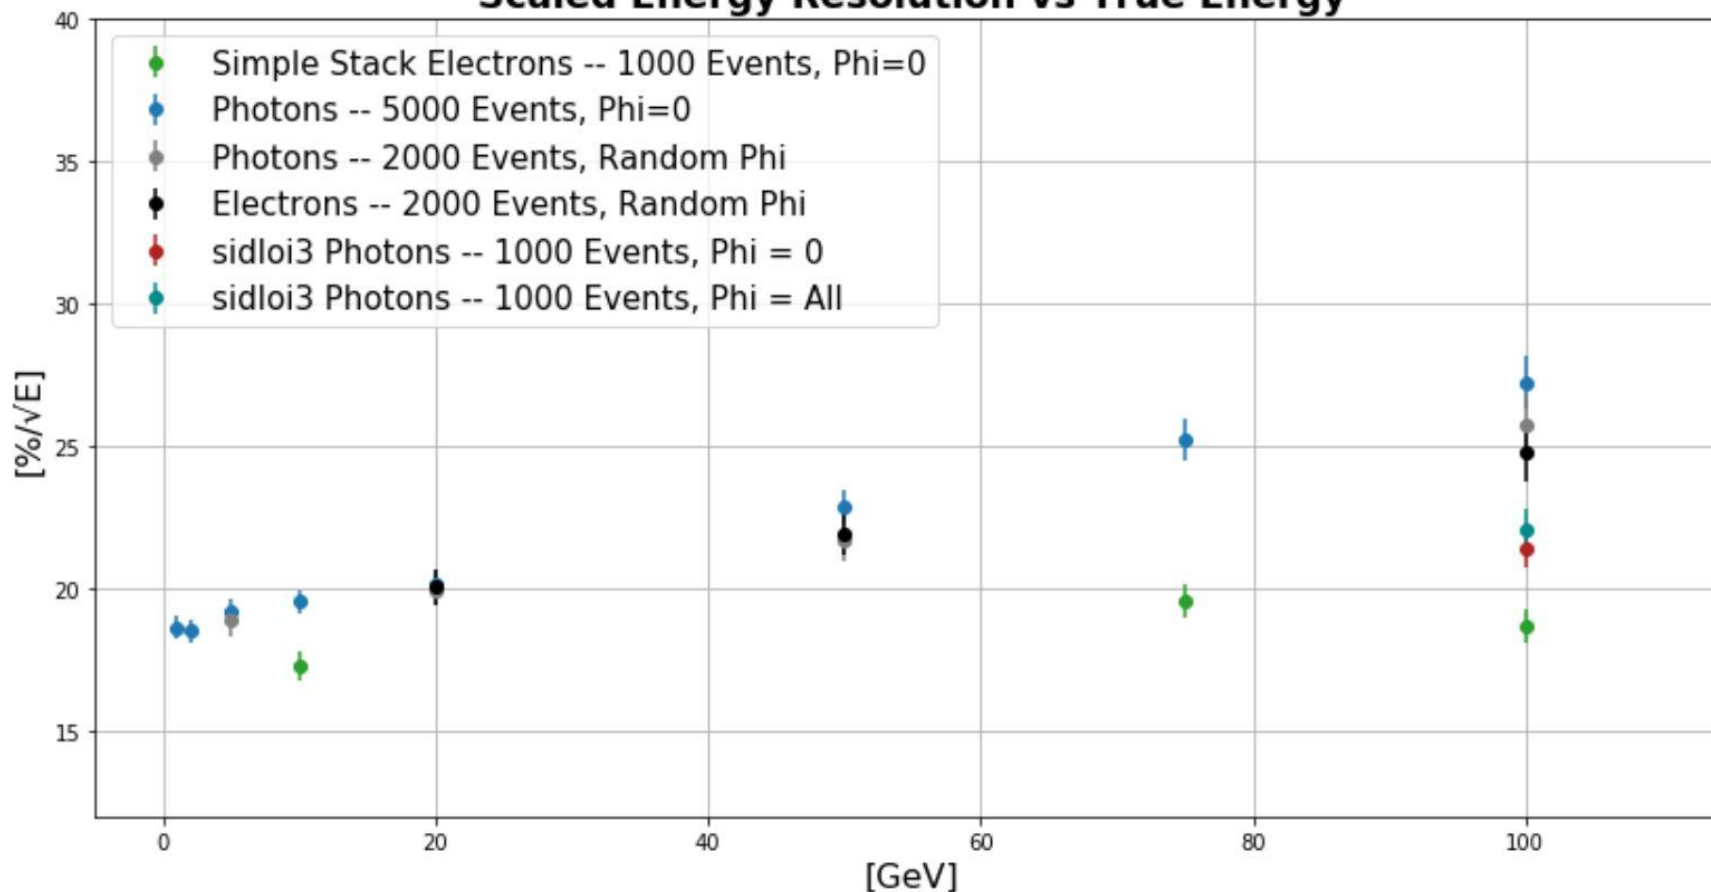


Consistency

- Resolution at $\phi = 0$ for old and current sidloi3 studies match

Discrepancy

- For $\phi = All$, old and current studies do not match ($\sim 29\%/\sqrt{E}$ compared to $\sim 22\%/\sqrt{E}$)


HOW DOES INCIDENT HIT LOCATION IN MODULE AFFECT RESOLUTION?

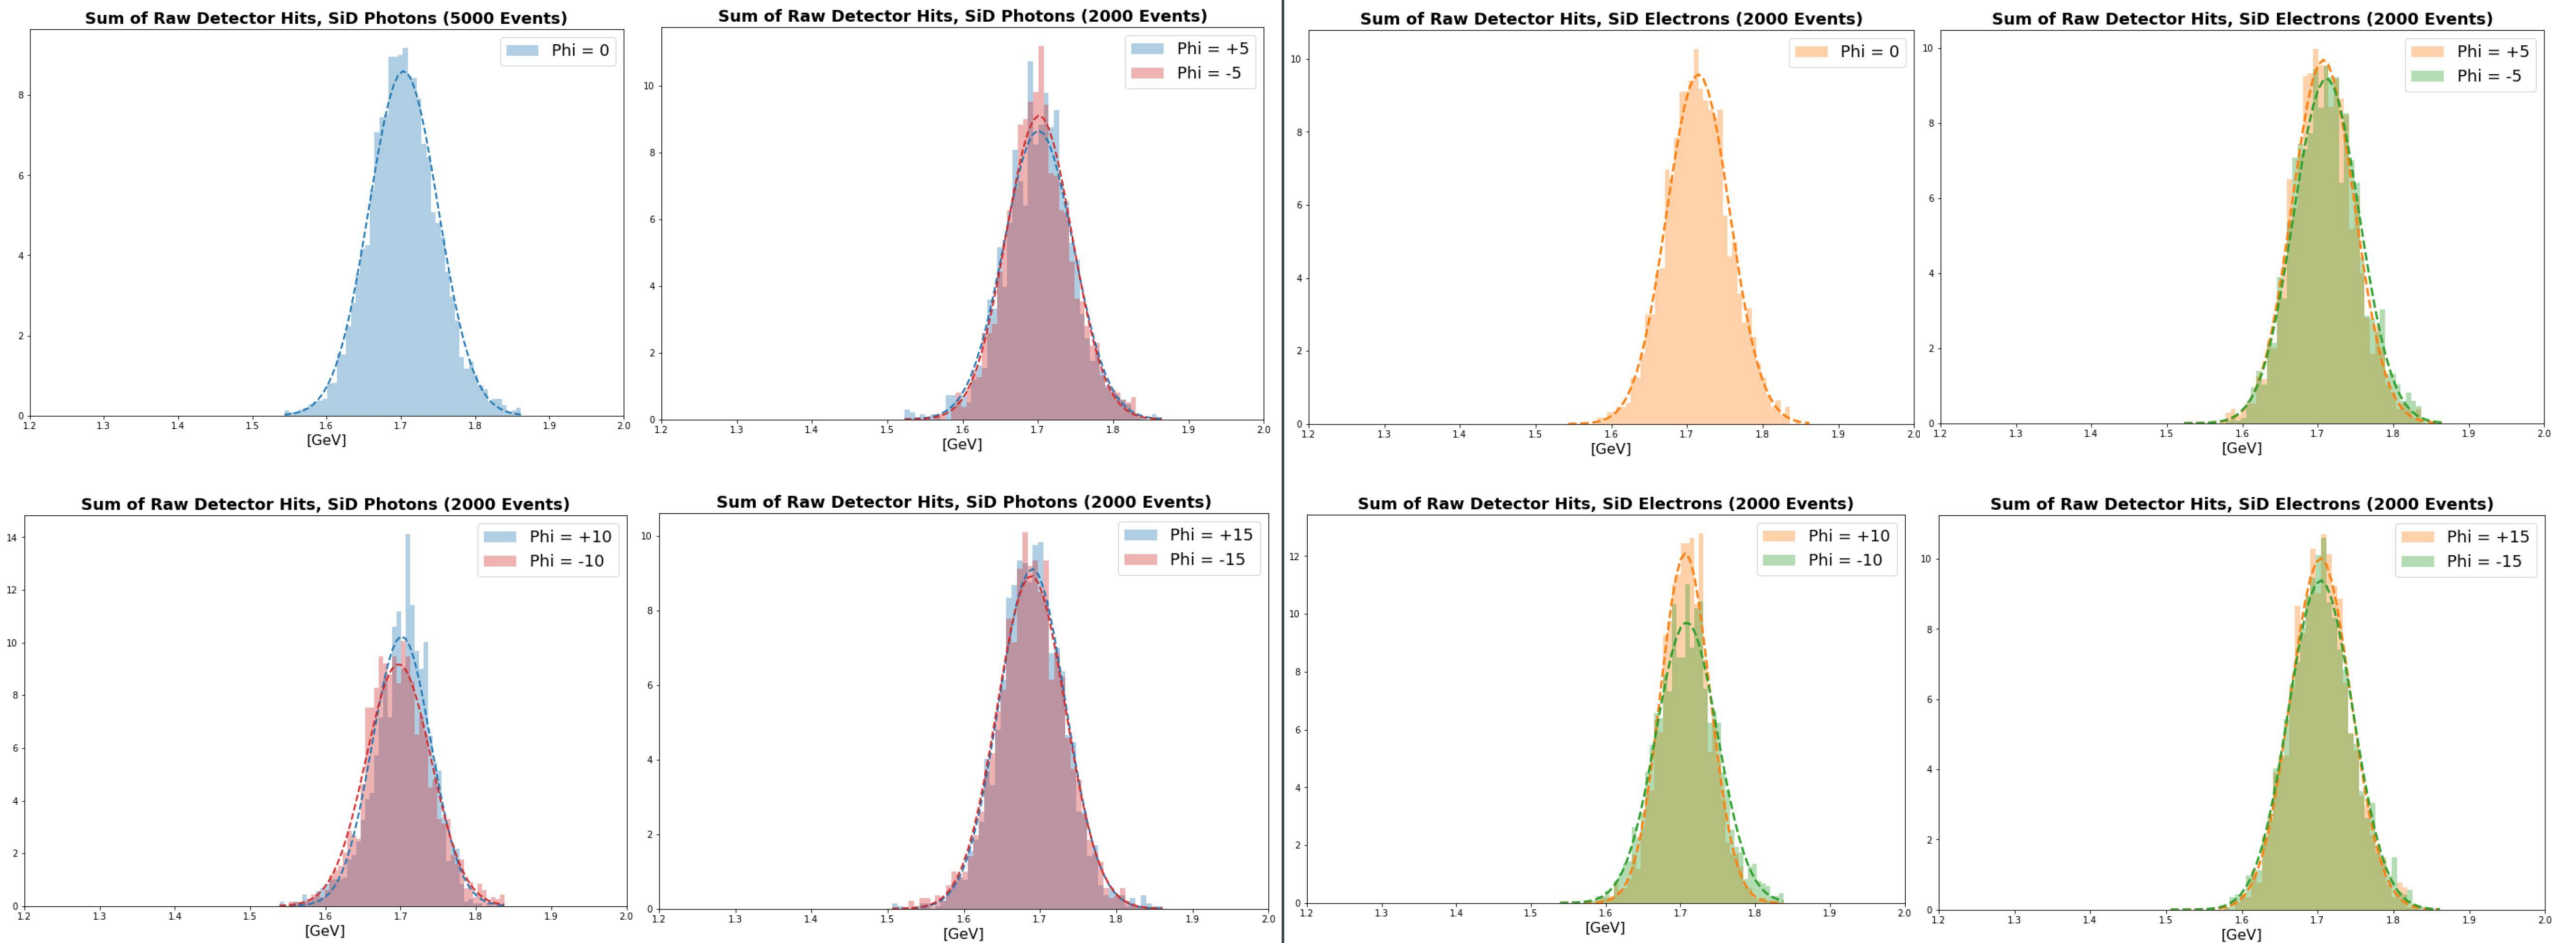

RESOLUTION DEPENDENCE ON PHI




Energy Resolution vs Phi Angle, 100 GeV Particles

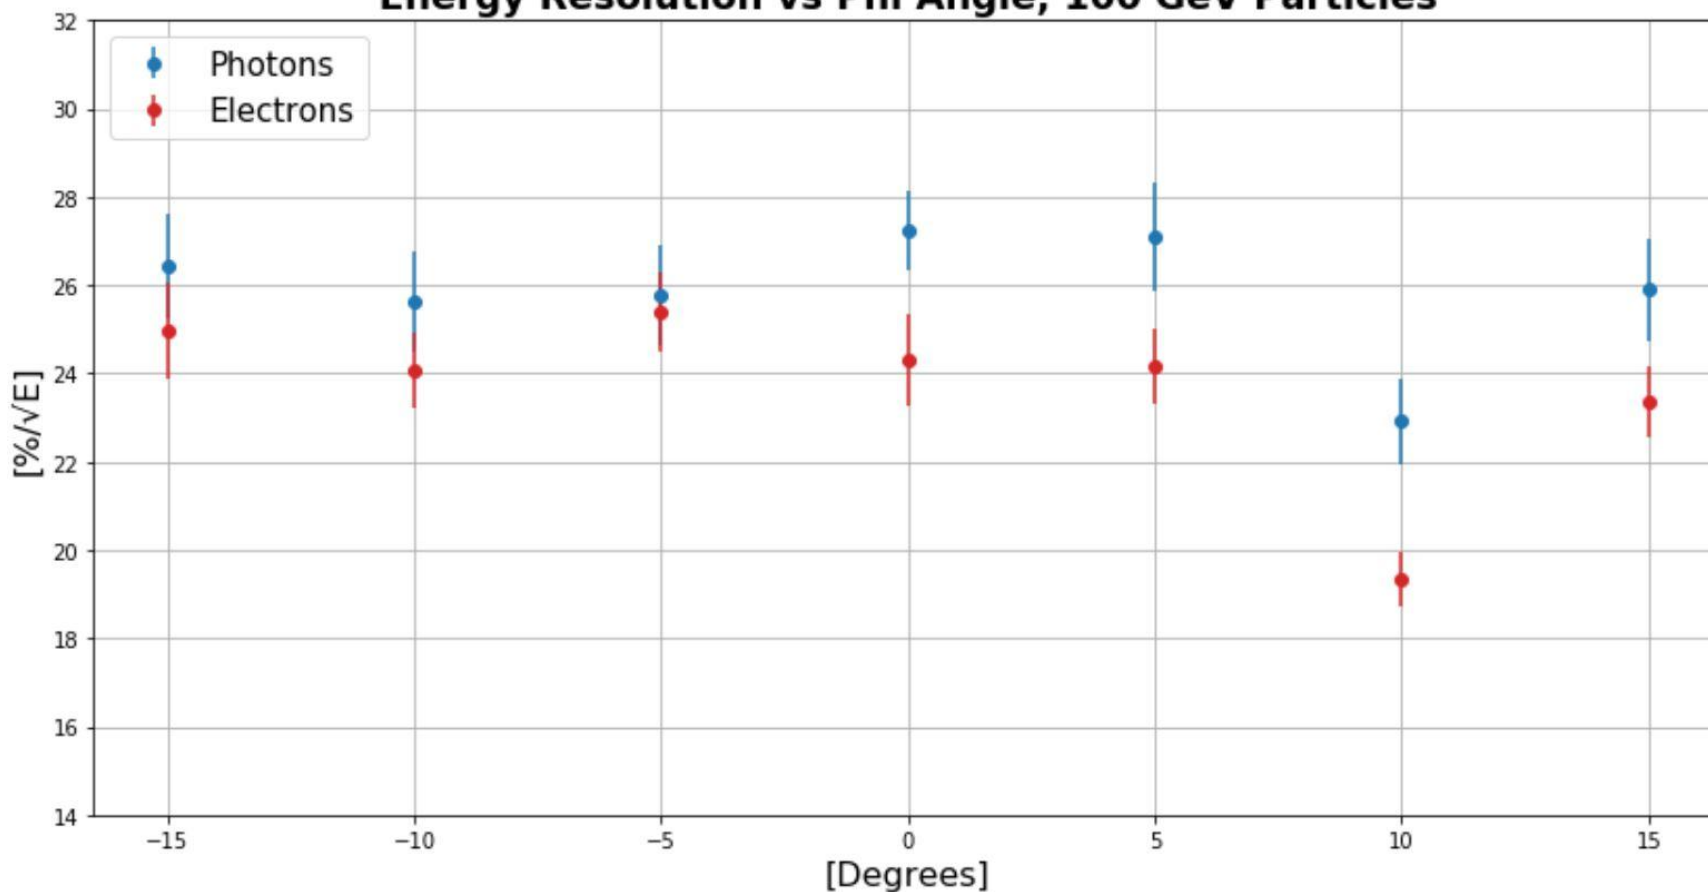

Closest overlap region to normal incidence: $\sim -4^\circ$

$\phi = 10^\circ$ ensures entire shower goes through center of module

100 GeV e^- at $\phi = 10^\circ$ is comparable to simple stack

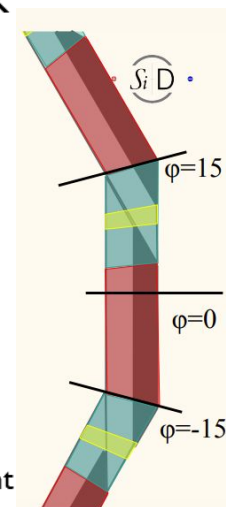


ϕ flipped from diagram on the right

SUMMARY OF CURRENT RESOLUTION RESULTS




Scaled Energy Resolution vs True Energy


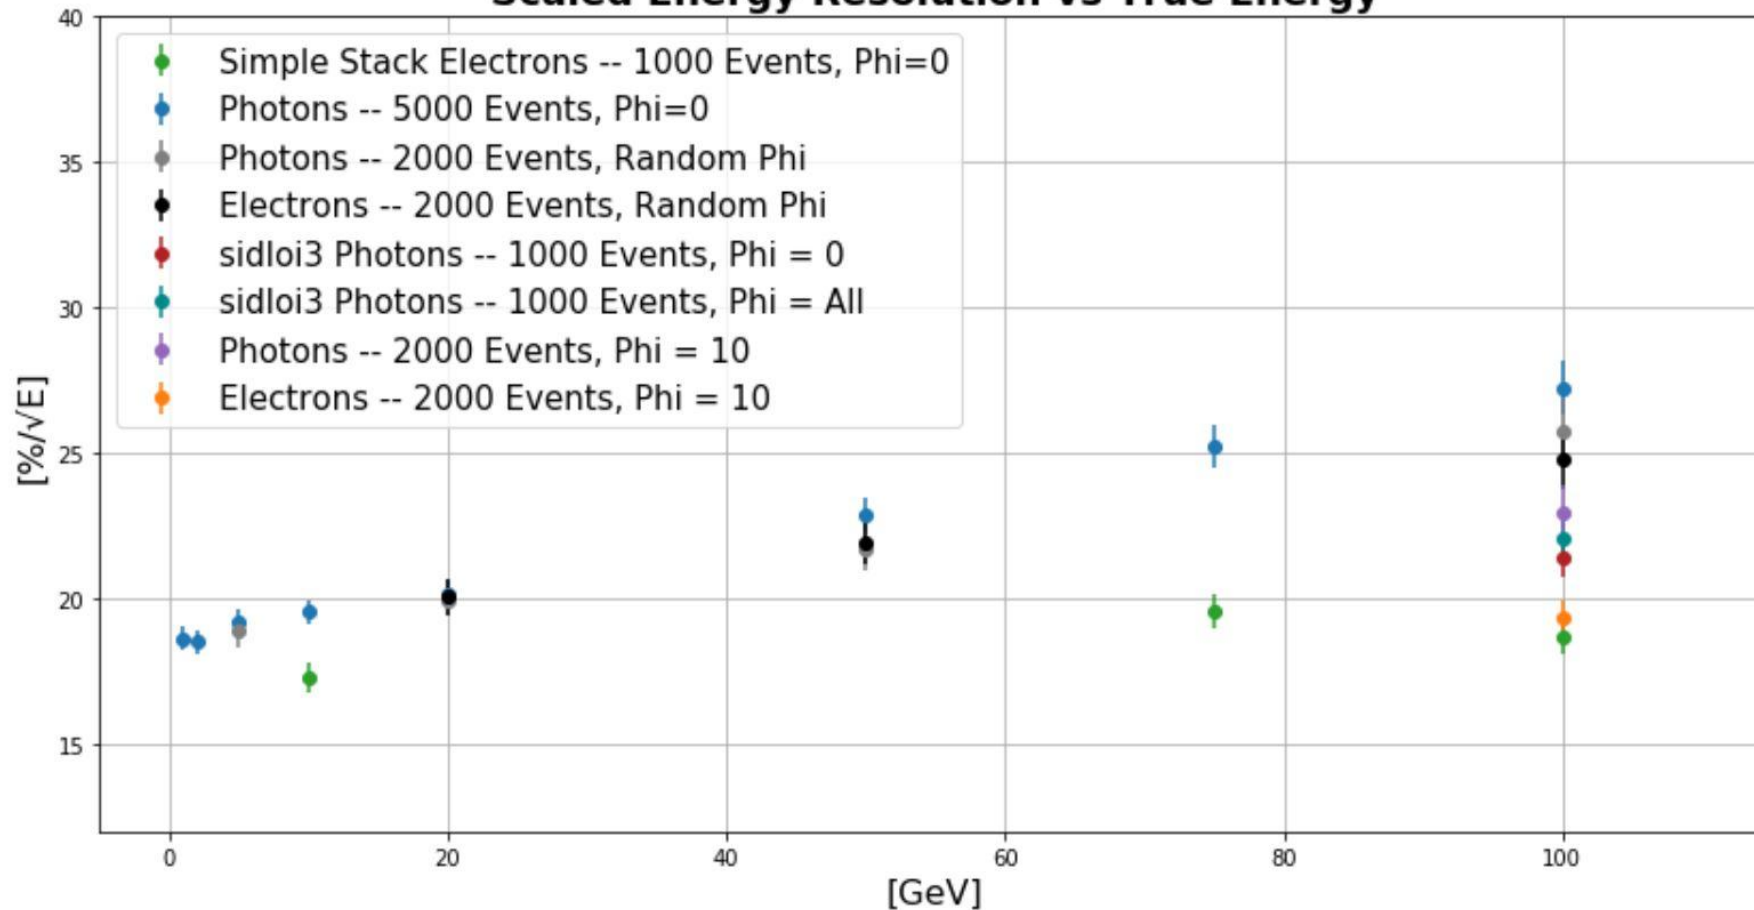


Current SiD compares better to previous studies when incident particles are fired at $\phi = 10^\circ$ instead of normal incidence

Shower mostly contained in nonoverlapping region

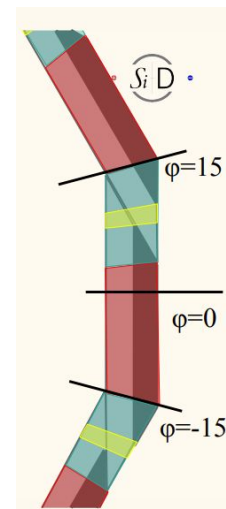


LOOKING AT “REAL” EVENTS

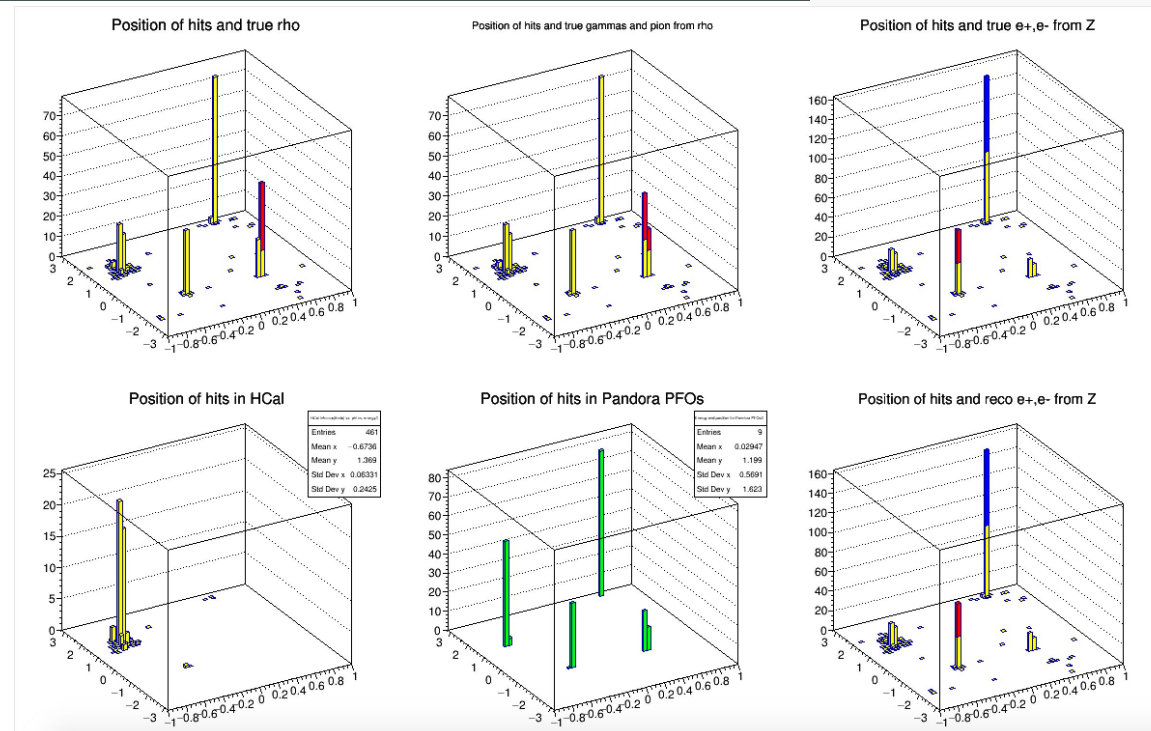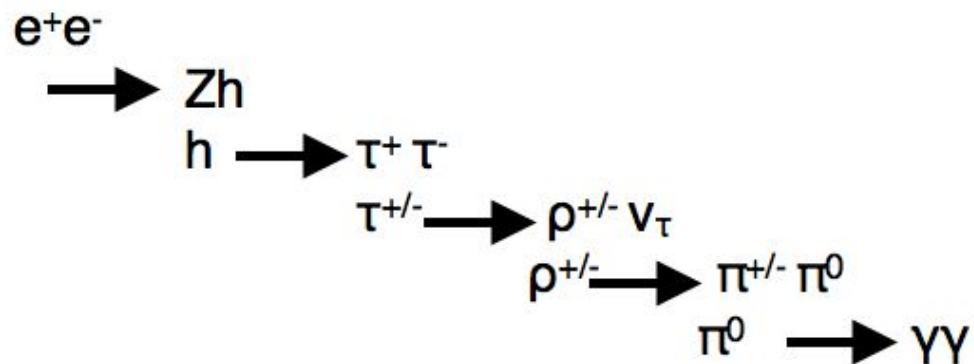


- Calorimeter hits (EcalBarrelReco, HcalBarrelReco...)
- True MCParticle (rho, gamma, pi+)
- Electron/Positron
- Pandora PFOs


Position of hits and true gammas and pion from rho

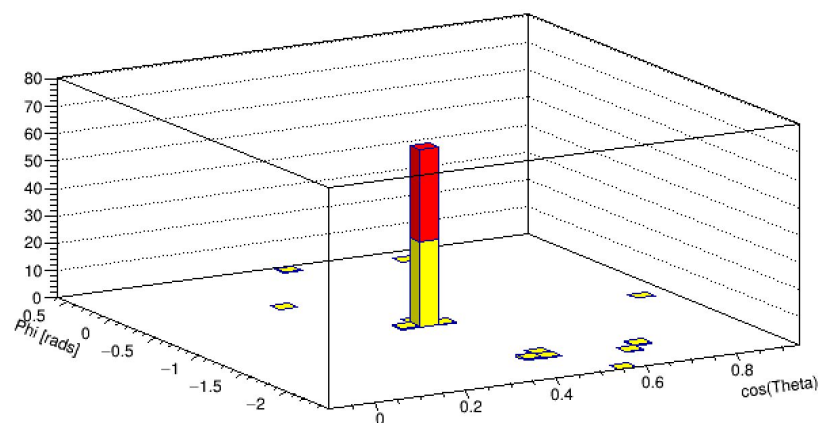

Angle of Cone vs. % of Rho energy in Calorimeter within cone

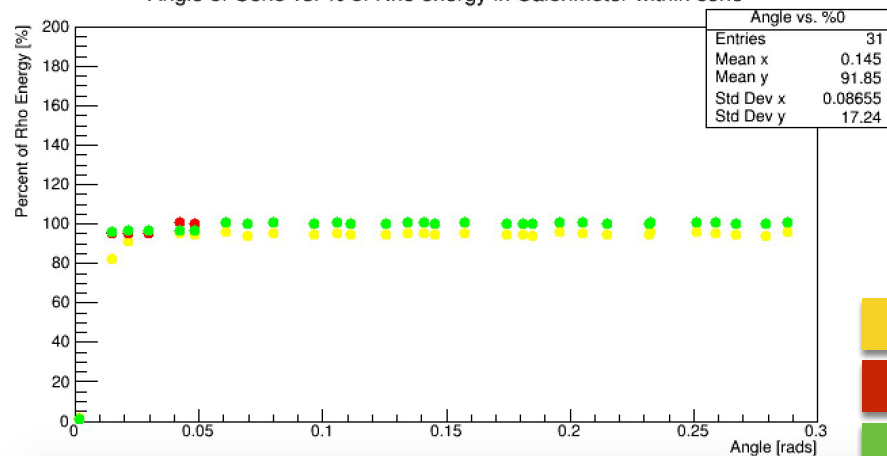


Percent of Rho vs. Cone Angle

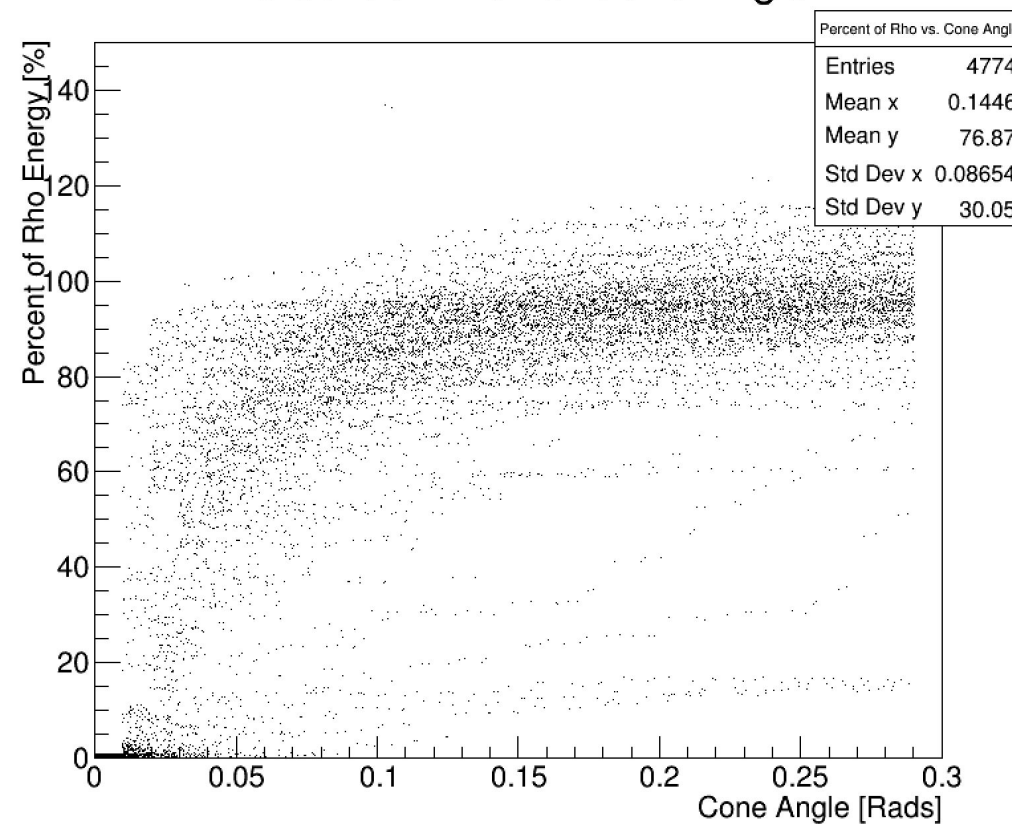


Raw Data
 Truth Info
 Pandora PFOs

Percent of Events that Reach a Certain Percent of Rho Energy

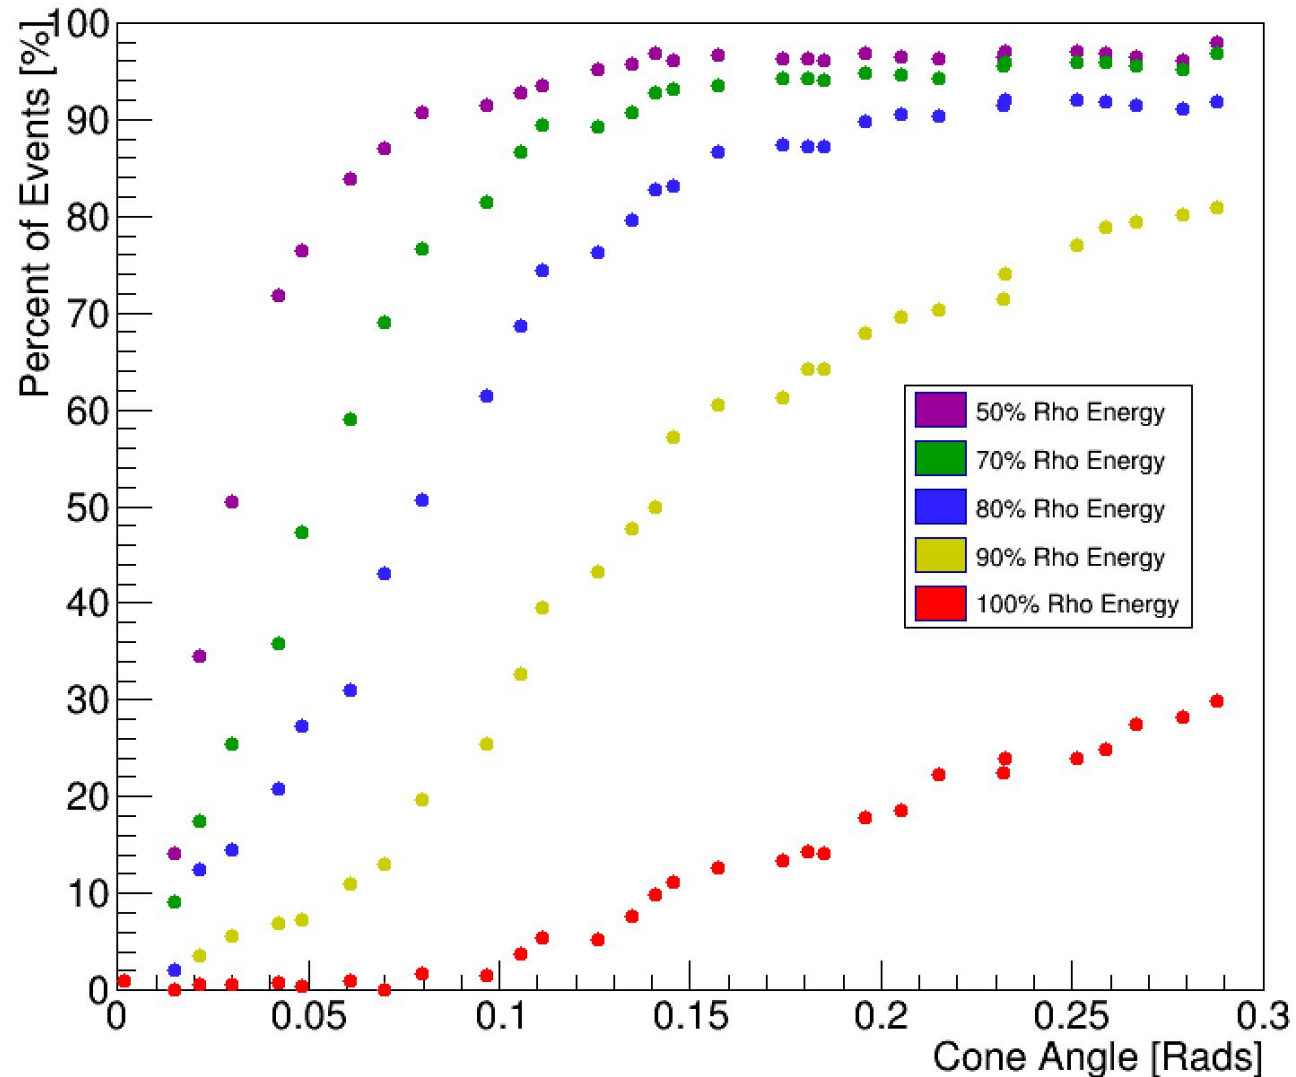

Here we are choosing a certain percent of the rho energy and looking at the cone angle vs. the percent of events that contain the percent of rho energy that was chosen.

Cumulative Distribution for Percent of Rho Energy at a Certain Cone Angle

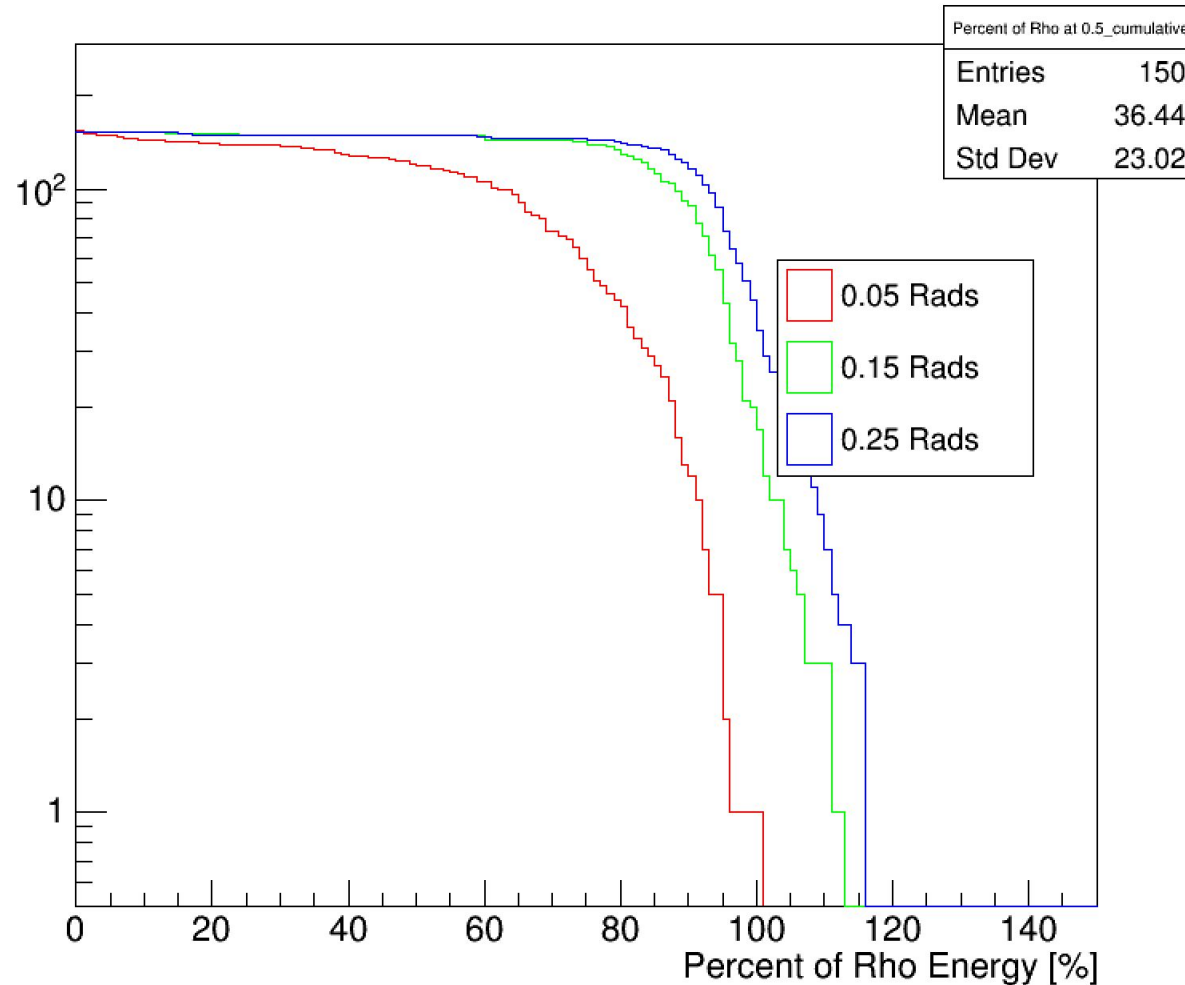

Here we are choosing a certain cone angle and looking at the cumulative distribution for how many events get to a certain percent of the rho energy shown on the x-axis. Looking at 100% for 0.15 radians we see that in nearly all the events, the cone contains all the rho energy.

SUMMARY




- Better understanding current results more every day
 - Resolution differences from initial design resolution to current design geometry
 - Comparison between versions of geometry can be tricky

BACKUP



- Distribution of energies in simulation depending on which way the test beam was facing into the detector, small differences

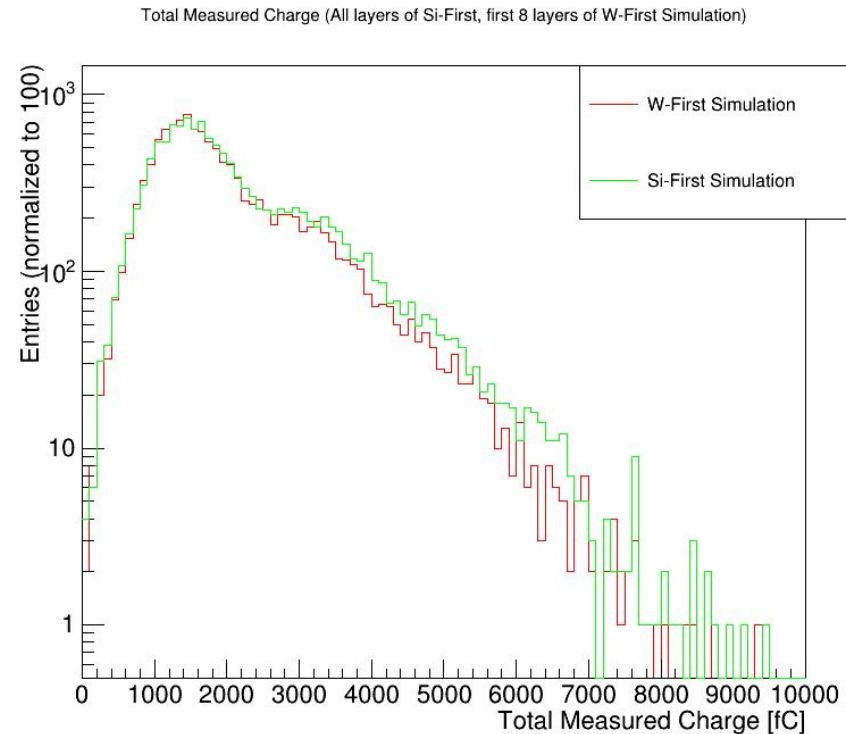





Cross-Talk on Test Beam Sensor



SLAC Test Beam

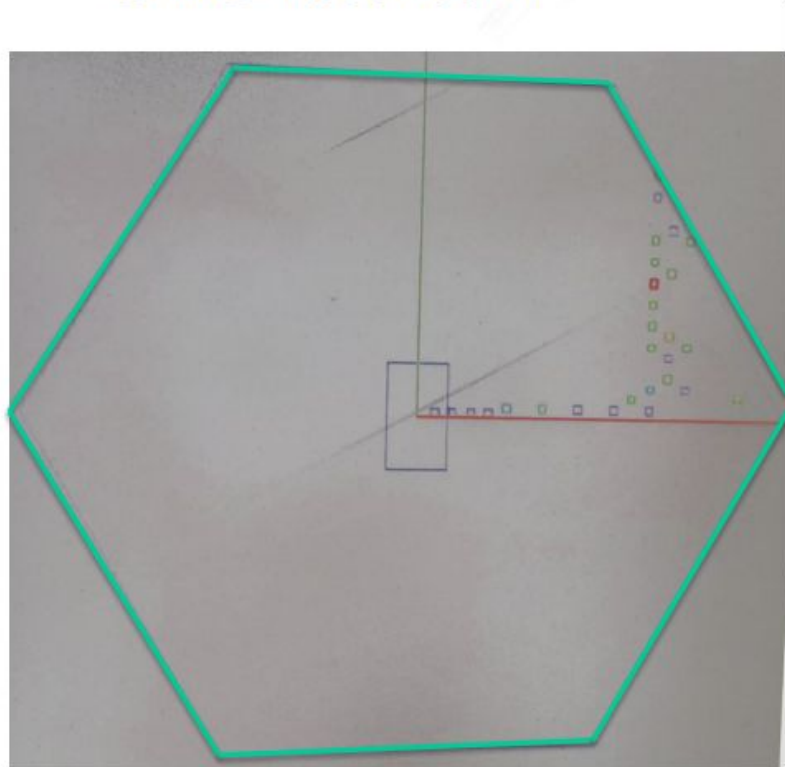

Probe-Tested Sensor

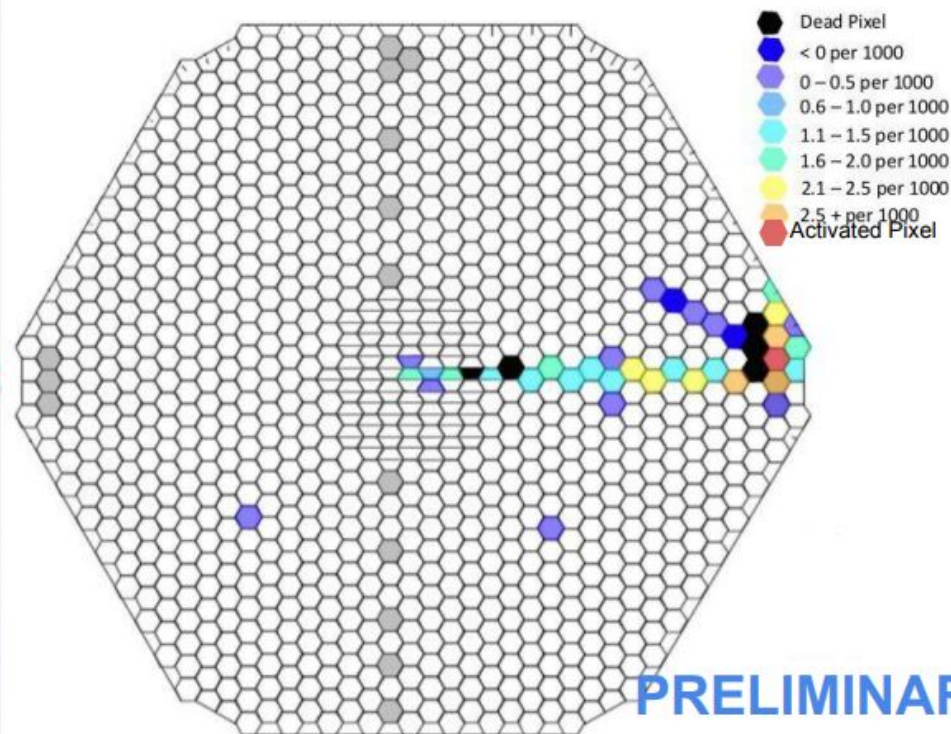


PRELIMINARY

- Additional signal detected in pixels along trace of activated pixel (cross talk)
- Should be reduced with new shielded KPix model

Work done at the
University of
Oregon:
C. Gallagher




“monster events” with many negative amplitude and out of time hits

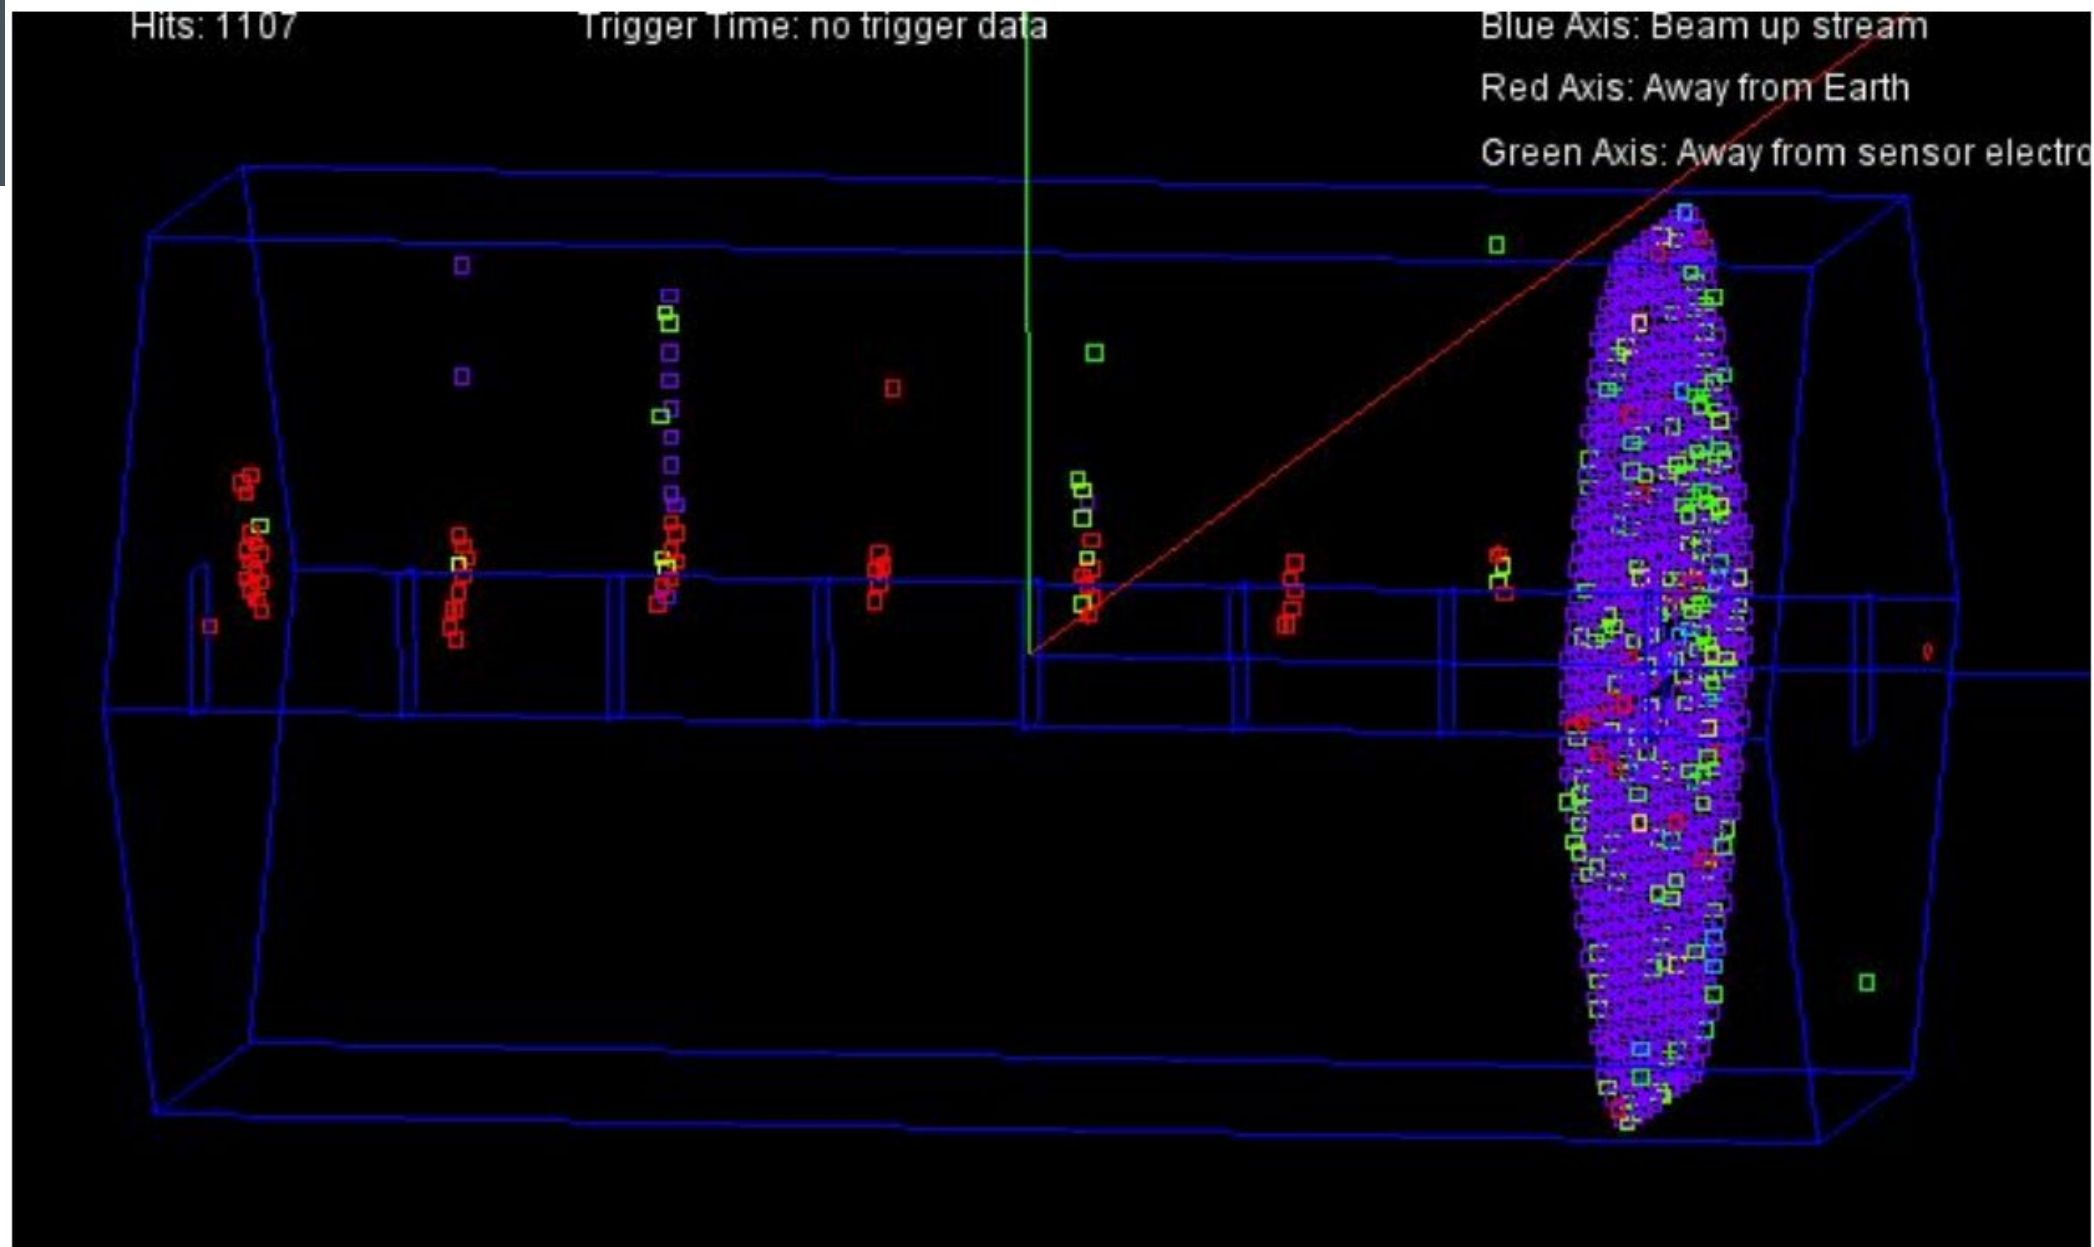

BACKSCATTER



Measured Energy of Hits (5000 10 GeV photons, $\phi=0$, $\theta=90$, bins = 1 MIP)

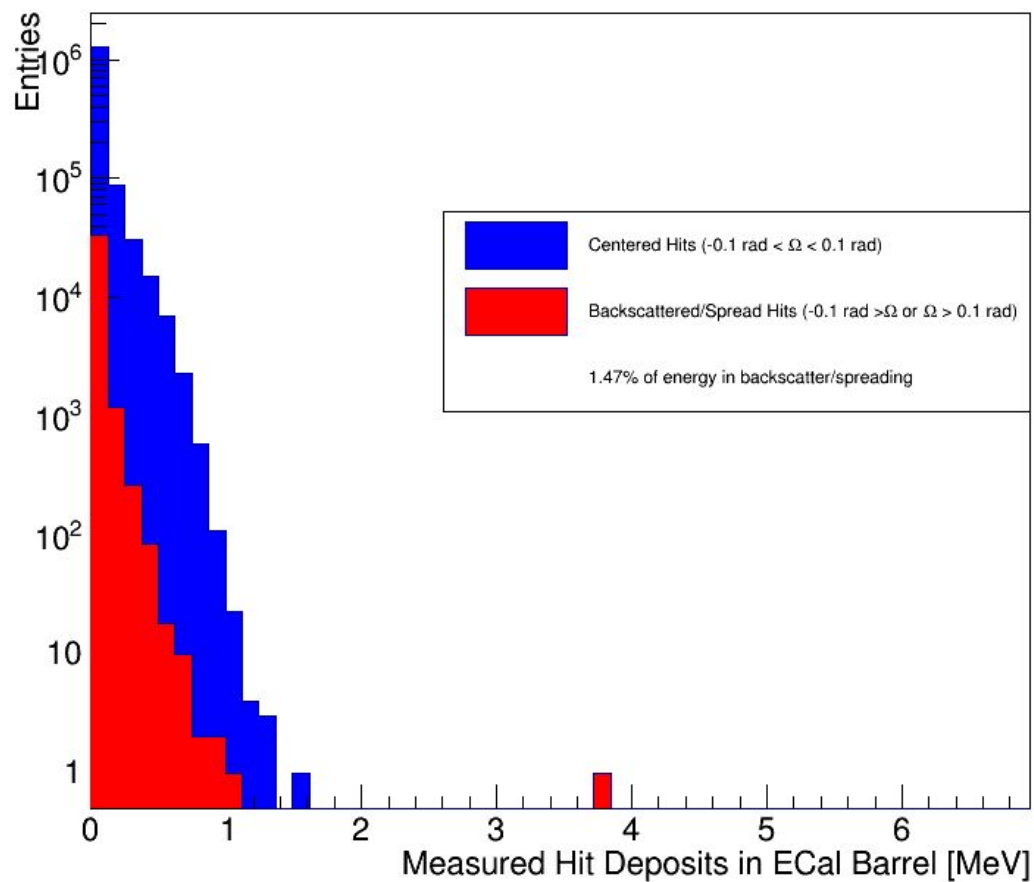

Angle Between Beam and Shower Hits (500 photon showers, $\phi=0$, $\theta=90$)

