



Low Emittance Tuning in CESR TA

D. Rubin

Cornell University

April 18, 2009




Attain sufficiently low vertical emittance to enable exploration of

- dependence of electron cloud on emittance
- emittance diluting effect of e-cloud

- Design/deploy low emittance optics ($1.5 < E_{\text{beam}} < 5.0 \text{ GeV}$)
 - Exploit damping wigglers to reduce damping time and emittance
- Establish efficient injection of electrons and positrons
- Develop beam based techniques for characterizing beam position monitors
 - BPM offsets, Gain mapping, ORM and transverse coupling measurements > BPM tilt
- And for measuring and minimizing sources of vertical emittance including
 - Misalignments
 - Orbit errors
 - Focusing errors
 - Transverse coupling
 - Vertical dispersion
- Develop single bunch/single pass measurement of vertical beam size
- Characterize current dependence of lifetime in terms of beam size
- Measure dependencies of beam size/lifetime on
 - Beam energy
 - Bunch current
 - Species
 - Etc.



- Twelve 1.9T wigglers in zero dispersion straights yield 10-fold reduction in radiation damping time and 5-fold reduction in horizontal emittance
- Conditions are well established
 - Injection capture efficiency for both electrons and positrons is good
 - Low current (<1mA/bunch) lifetime ~ hours for both species

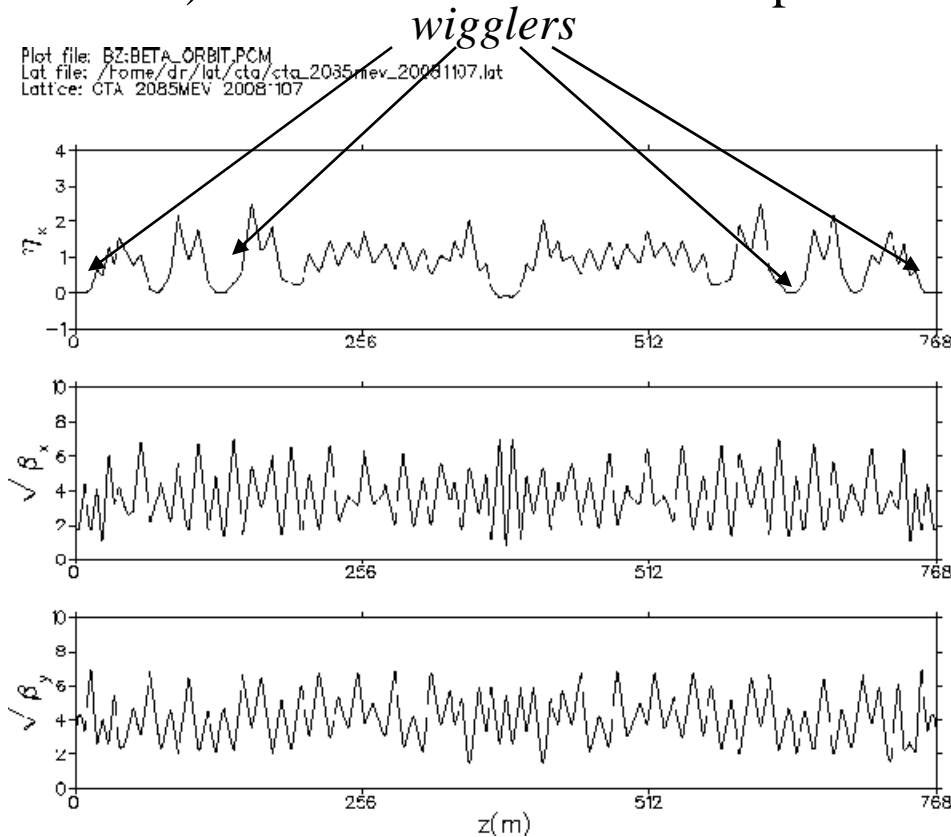


Energy [GeV]	2.085
Wiggler[T]	1.9
Qx	14.57
Qy	9.6
Qz [4.5MV]	0.055
ϵ_x [nm]	2.6
α_p	6.76e-3
σ_l [mm]	12.2
σ_E/E [%]	0.81



Six 1.9T wigglers in L0 - zero dispersion (Arc vacuum chambers cannot tolerate wiggler radiation)

	(Wigglers off)	
Energy [GeV]	5.0	
Wiggler[T]	1.9	0
Qx	14.57	
Qy	9.6	
Qz [8 MV]	0.043	
ϵ_x [nm]	35	60
α_p	6.23e-3	
σ_l [mm]	15.6	9.4
τ_{rad} [ms]	20	30
σ_E/E [%]	0.93	0.58

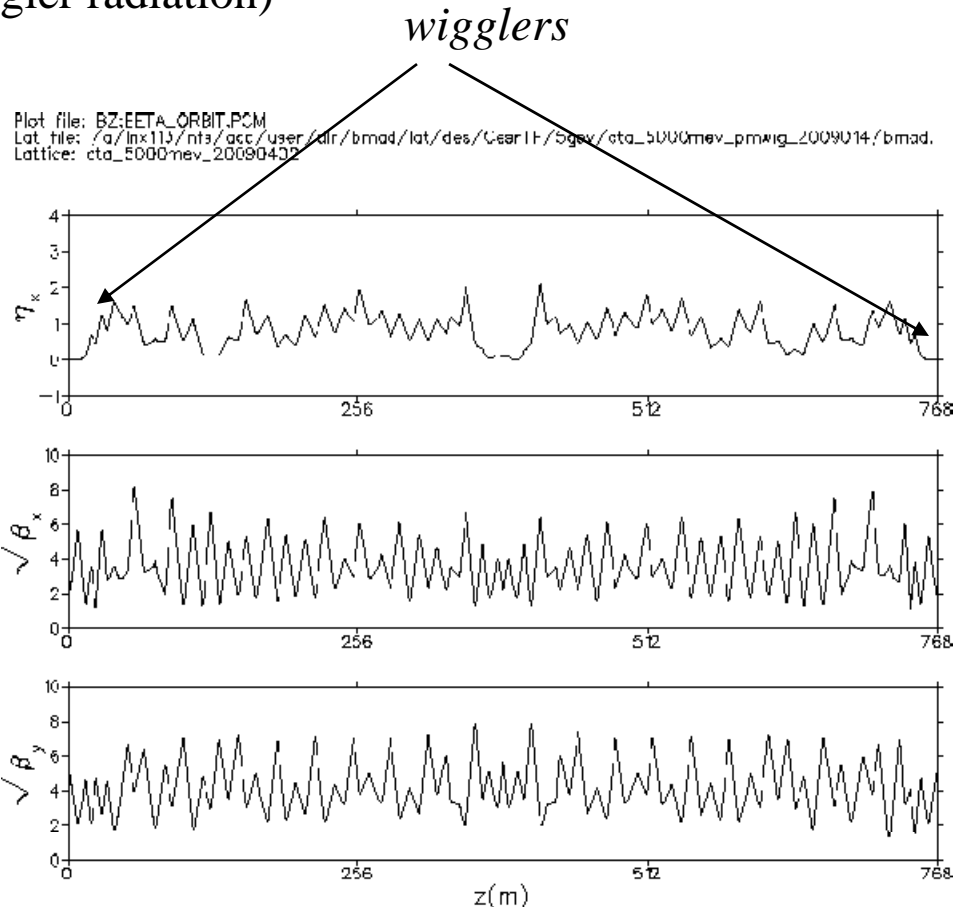






Low emittance tuning
Experimental procedure

LET - initialization

- Measure and correct orbit using all dipole correctors
- Measure β -phase and transverse coupling
(Phase measurement insensitive to BPM offset, gain, and calibration errors)

Measurement at January 09 startup after 2 month CHESS (5.3GeV) run



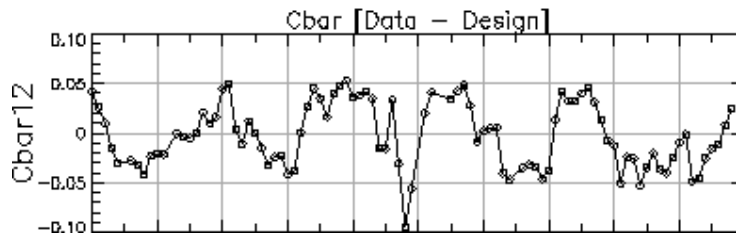
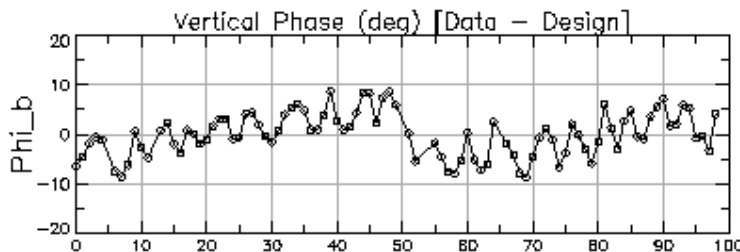
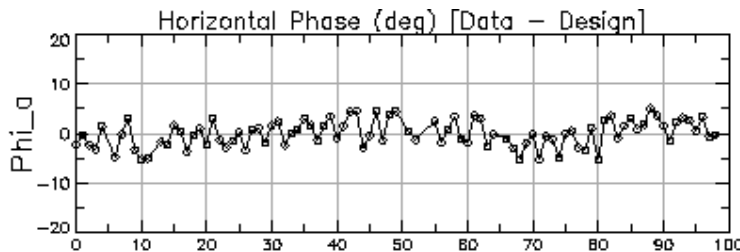




Low emittance tuning Experimental procedure

LET - initialization

- Measure and correct orbit using all dipole correctors
- Correct β -phase using **all** 100 Remeasure - ($\sqrt{\langle \Delta\phi^2 \rangle} < 1.5^\circ$)
- Correct transverse coupling using 14 skew quads. Remeasure ($\sqrt{\langle \bar{C}_{12}^2 \rangle} \sim 0.6\%$)

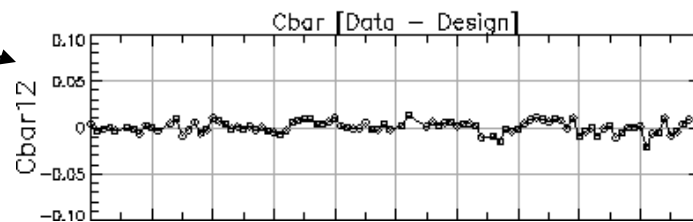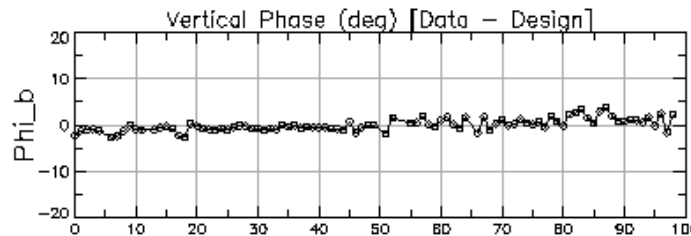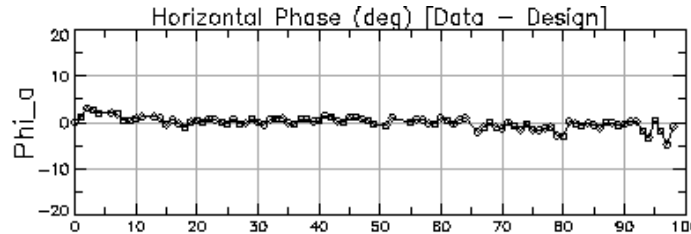

β -phase and coupling after correction



Low emittance tuning

Orbit

A feature of the orbit is the closed horizontal bump required to direct xrays onto x-ray beam size monitor


-Measure and correct vertical dispersion using skew quads (14) and vertical steering (100)

Residual vertical dispersion

RMS ~ 2.4cm - Signal or noise ?
Difficulty modeling suggests that it is noise.


Accuracy of dispersion measurement is limited by BPM systematics

2.4cm residual dispersion

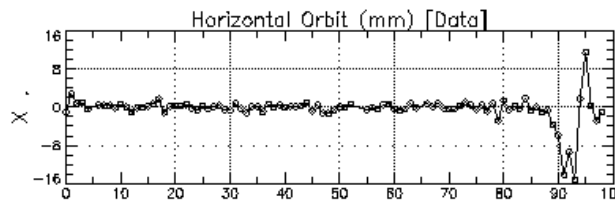


29-Jan-09 00:30:11
CTA_2085MEV_20081107
Dat: butns.120491
Ref: NONE
CESR Set: 126345
RMS = 2.847
Average = -0.379

xBSM bump

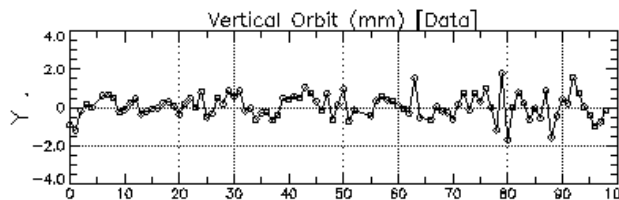


RMS = 0.635
Average = 0.065

Ability to correct the vertical orbit is limited by BPM resolution and irreproducibility

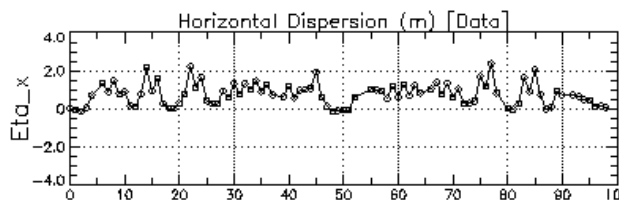

2009-JAN-29 00:30:11
CTA_2085MEV_20081107
Dat: eta.00835
Ref: NONE
CESR Set: 126345
RMS = 0.957
Average = 0.759

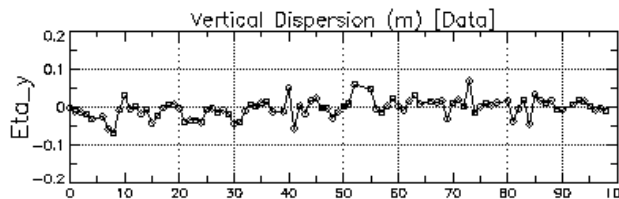

RMS = 0.024
Average = -0.003




Note: Residual vertical dispersion 1cm, corresponds to $\epsilon_y \sim 10\text{pm}$



Survey network complete

- Quad offset $\sigma \sim 134\mu\text{m}$
- Bend roll $\sigma \sim 160\mu\text{rad}$
- Sextupoles ?

Fixed with respect to adjacent quadrupole
Investigating systematic $\sim 350\mu\text{m}$ offset
Designing fixtures for correction

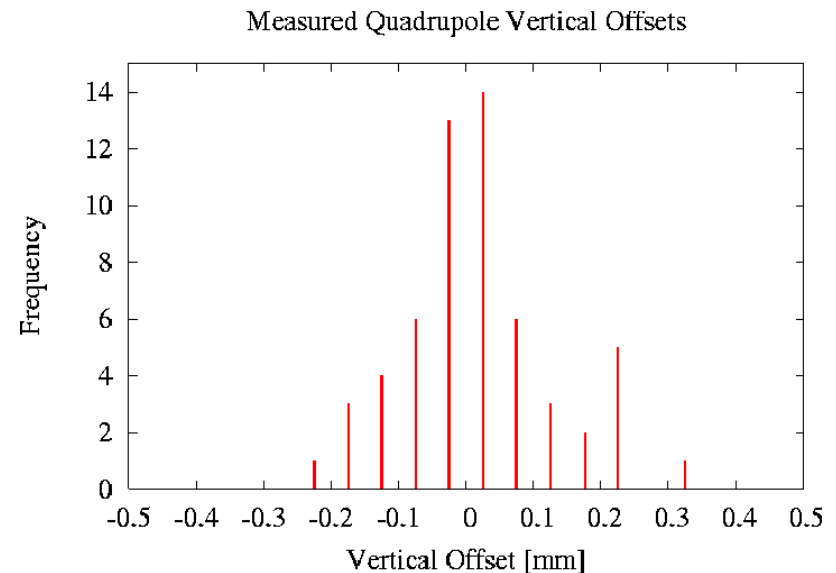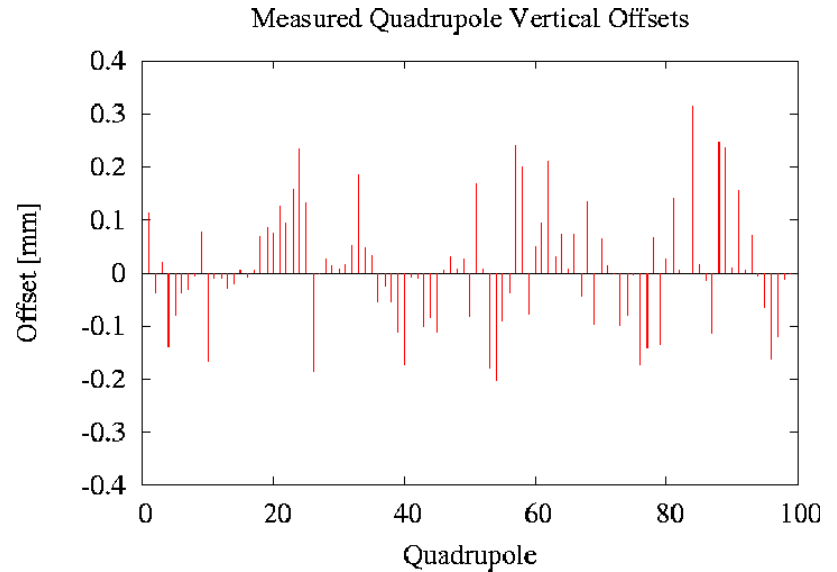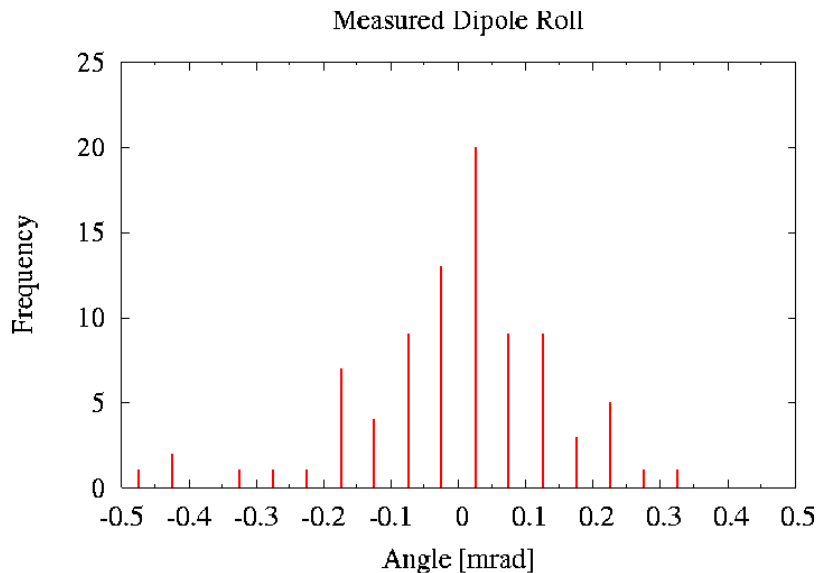



BPM tilt

- “measured” $\eta_v \sim \theta \eta_h$

where $\theta = \text{BPM tilt}$


Since $\langle \eta_h \rangle \sim 1\text{m}$, BPM tilt must be less than 10mrad if we are to achieve $\eta_v < 1\text{cm}$

We use ORM and phase/coupling measurement to determine θ .

ORM data set ~ 140 measured orbit differences

- Take data set 1
- Vary 8 skew quads and repeat \square
- Take data set 2

Fit each data set using all quad(k), skew(k), BPM(θ)

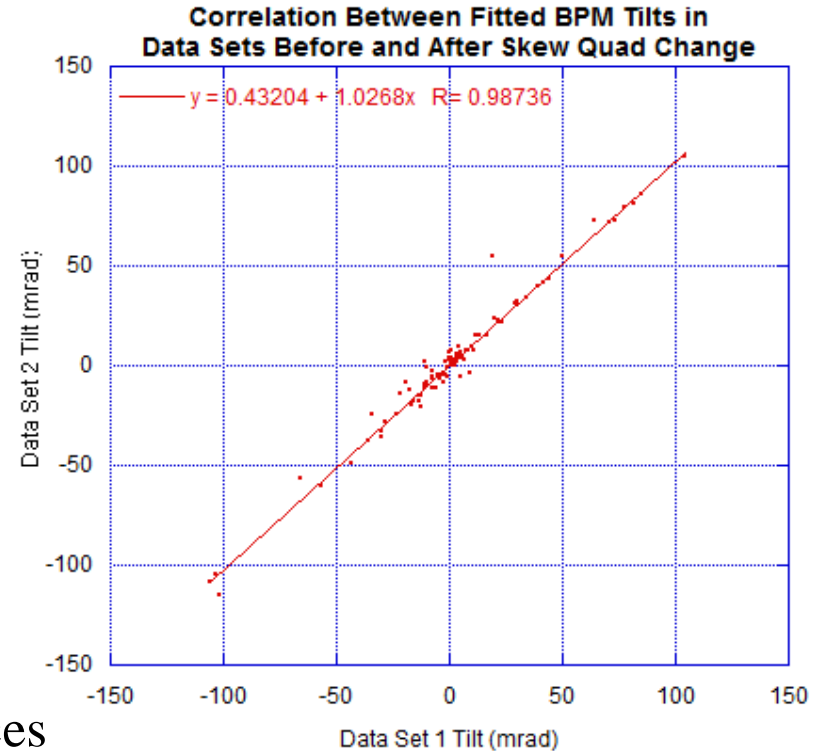

Correlation of fitted BPM tilt (θ)
 $\Delta\theta < 10 \text{ mrad}$

Consistent with $\sigma_{BPM}(\Delta x) \sim 35 \mu\text{m}$



Existing BPM electronics measure stretched signal and share common signal processing via mechanical relays

New system

- Bunch by bunch/turn by turn digitization
- 4ns bunch spacing
- $\sigma(\Delta x) < 10\mu\text{m}$


Status

Infrastructure (cables, crates, etc.) fully deployed in tunnel

Conversion from old system to new is underway - taking care to maintain full functionality during the transition

With the new system we will measure:

- Quad - BPM offset $< 50 \mu\text{m}$ via beam based alignment (Vary quad K to find center)
- $\Delta\eta \sim \Delta x / (\Delta E/E) \sim 10\mu\text{m} / 10^{-3} \sim 1\text{cm}$
- Clean measurement of C_{11} , C_{12} , C_{22} discriminates BPM tilt and transverse coupling (C_{12} independent of tilt)

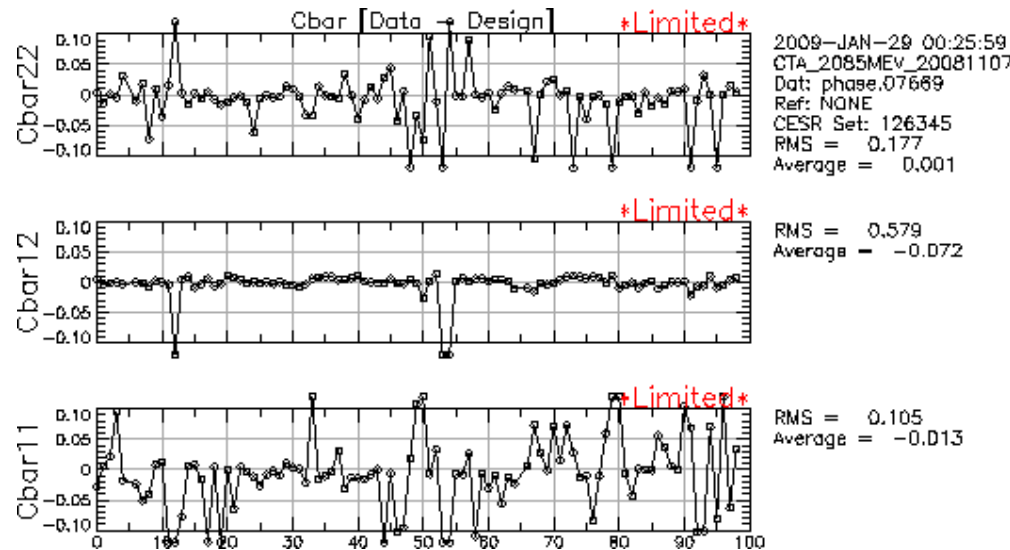



Touschek lifetime

CesrTA operates in a regime where lifetime is current dependent

Intrabeam scattering kicks particles outside of energy aperture


Touschek lifetime depends on energy aperture

$$\frac{dI}{dt} = -\frac{1}{c}I - \frac{1}{b}I^2$$

$$1/\tau_{eff} = -\frac{1}{I} \frac{dI}{dt} = \frac{1}{c} + \frac{1}{b}I$$

The Touschek parameter (b) decreases with:

- increasing beam size
(introducing η_v in damping wigglers)
- increasing bunch length
(reduced accelerating voltage)

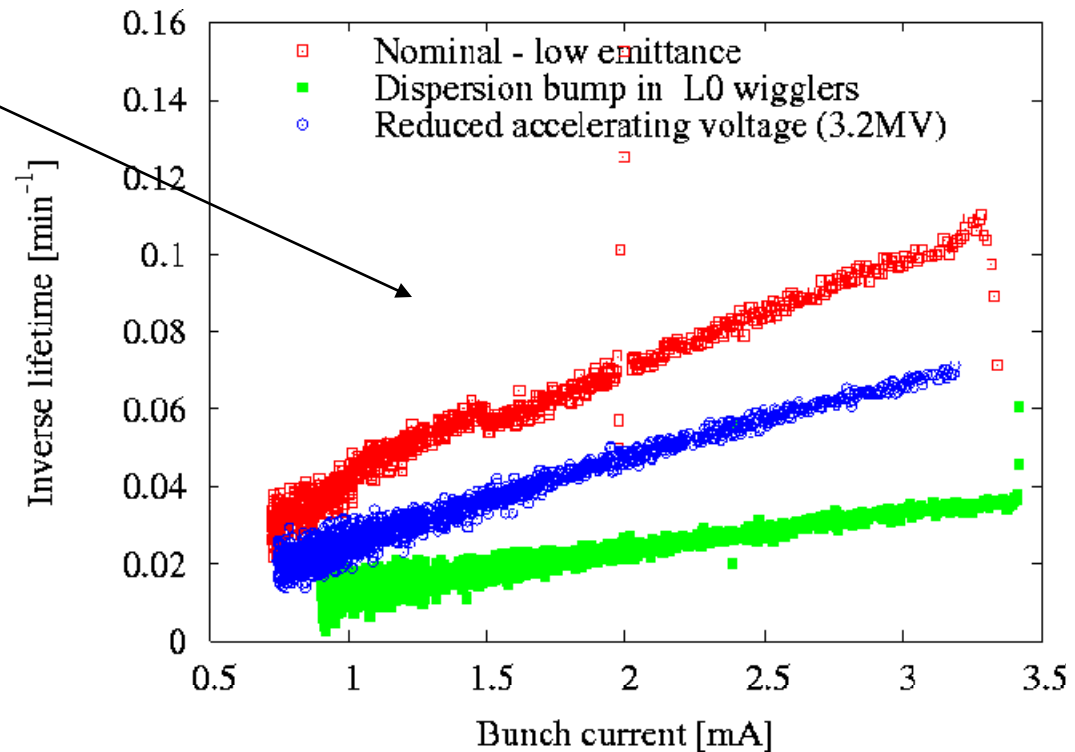




Touschek lifetime (and Touschek parameter [b]) depends on

- dynamic energy acceptance
- RF accelerating voltage
- vertical emittance

The curves in the plot show theoretical dependence of Touschek parameter on accelerating voltage for different combinations of dynamic acceptance and vertical emittance

The data (filled circles) are consistent with 0.72% energy acceptance and 32pm vertical emittance

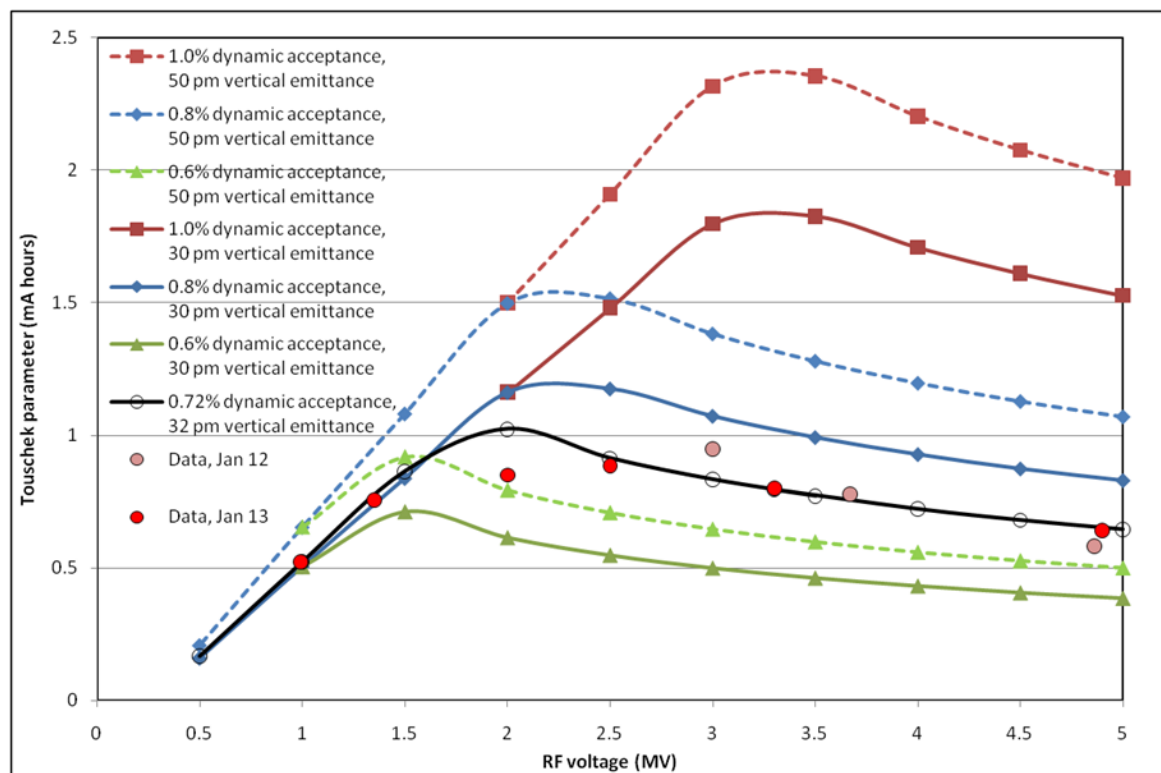



Interpretation of lifetime measurements requires knowledge of dynamic energy acceptance

Tracking study indicates energy acceptance $\sim 1.8\%$



(lifetime measurements suggest significantly smaller energy acceptance)

Tracking model includes:

- magnet misalignments
- wiggler and quadrupole nonlinearity
- Orbit errors

→Energy acceptance $\sim 1.8\%$

Nonlinearity of dipole correctors and sextupoles has not yet been included.

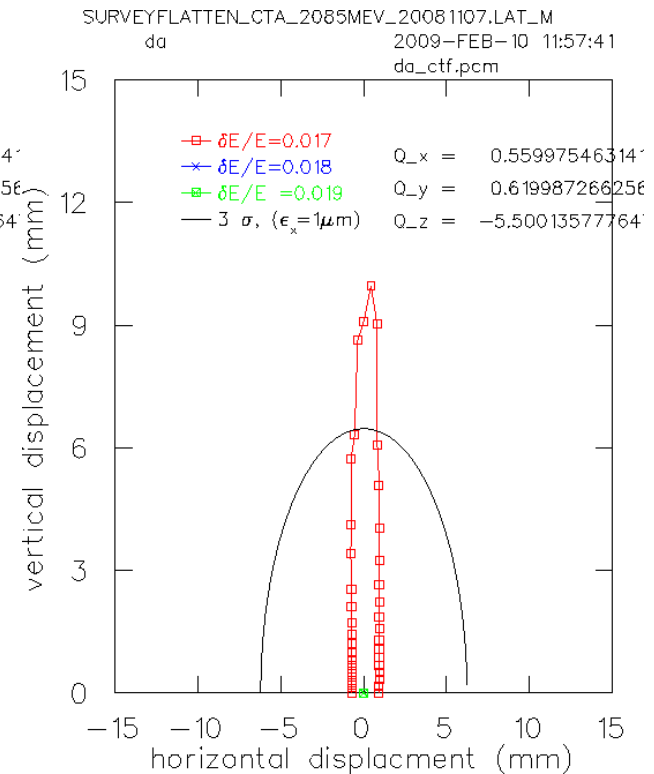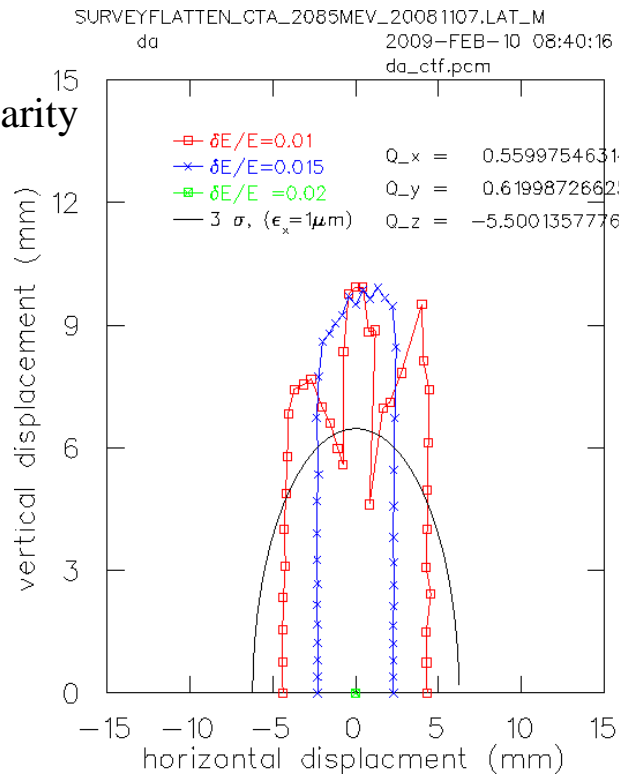




Determine energy acceptance experimentally
by measuring lifetime vs energy offset

$$\Delta E/E \sim 1/\alpha_p (\Delta f_{RF}/f_{RF})$$

→ Energy acceptance $\sim 0.8\%$


This *direct* measurement of
energy acceptance is consistent
with lifetime measurements and
 $\epsilon_v \sim 32\text{pm}$


*It remains for us to reconcile
measurement and tracking
calculation of energy acceptance.*

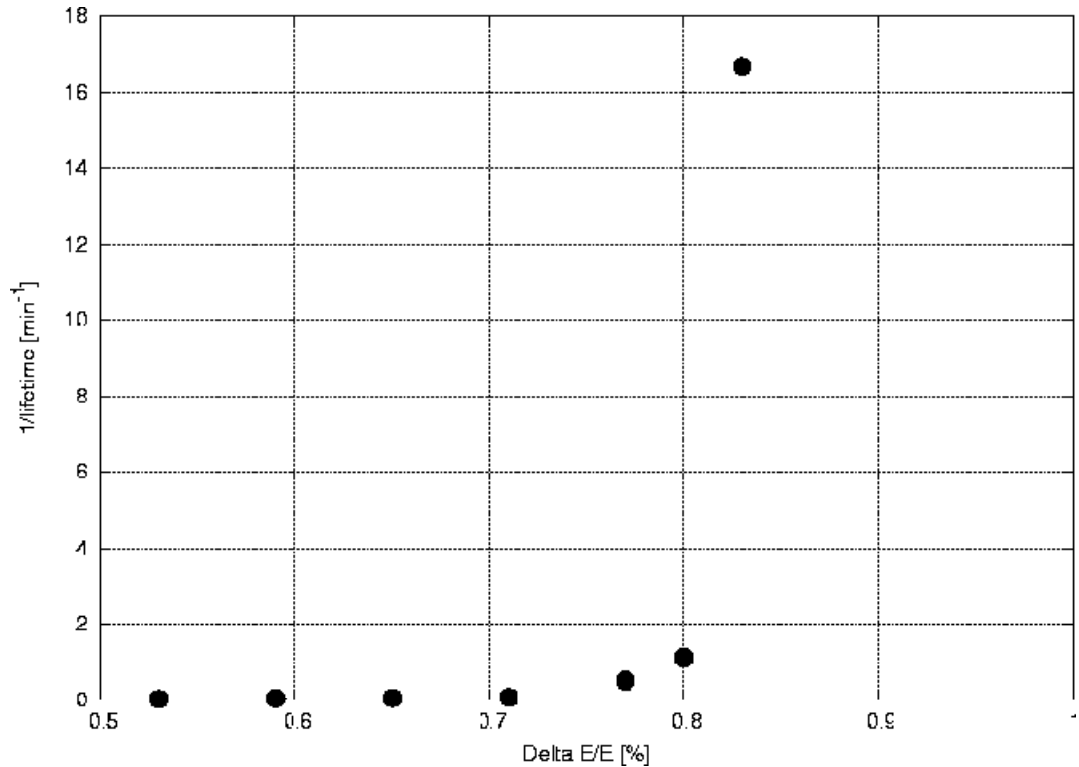




Xray Beam Size Monitor

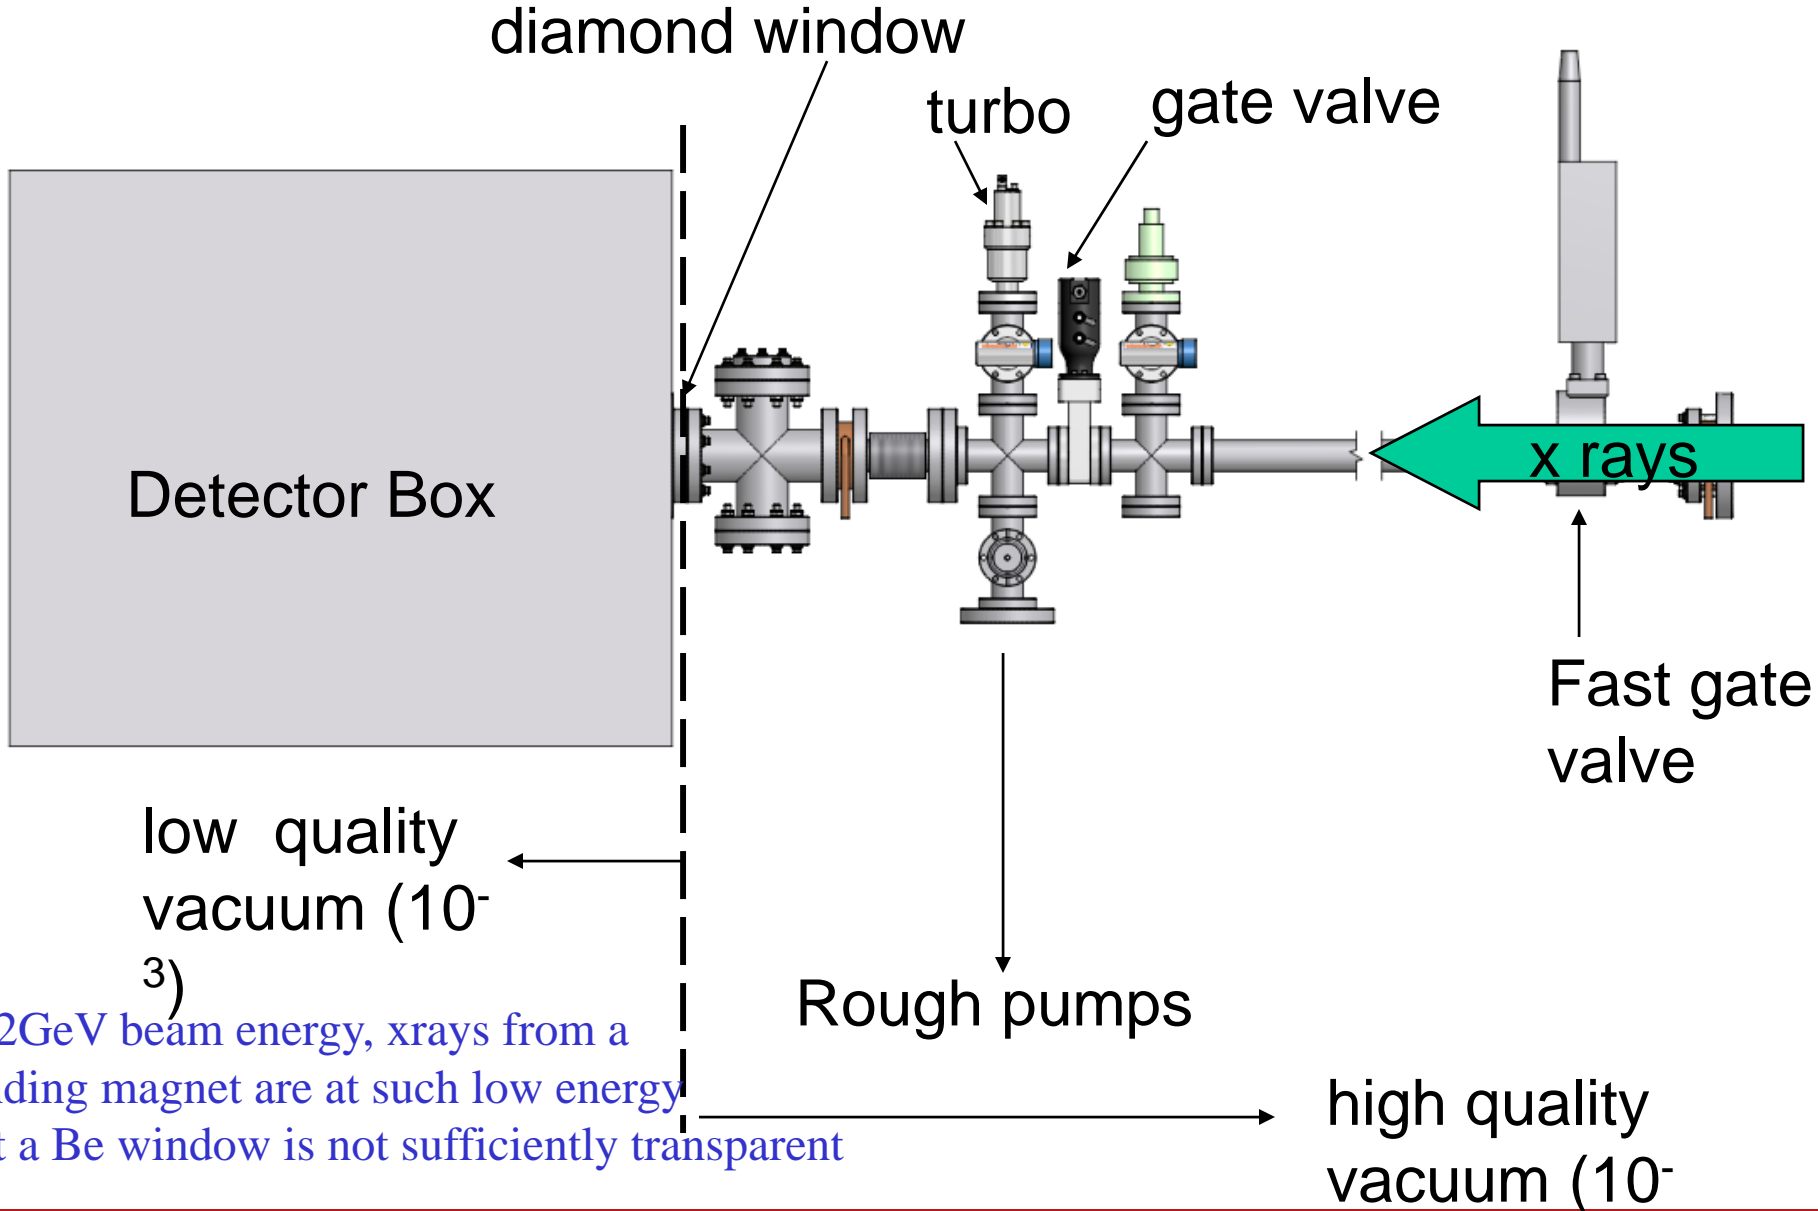

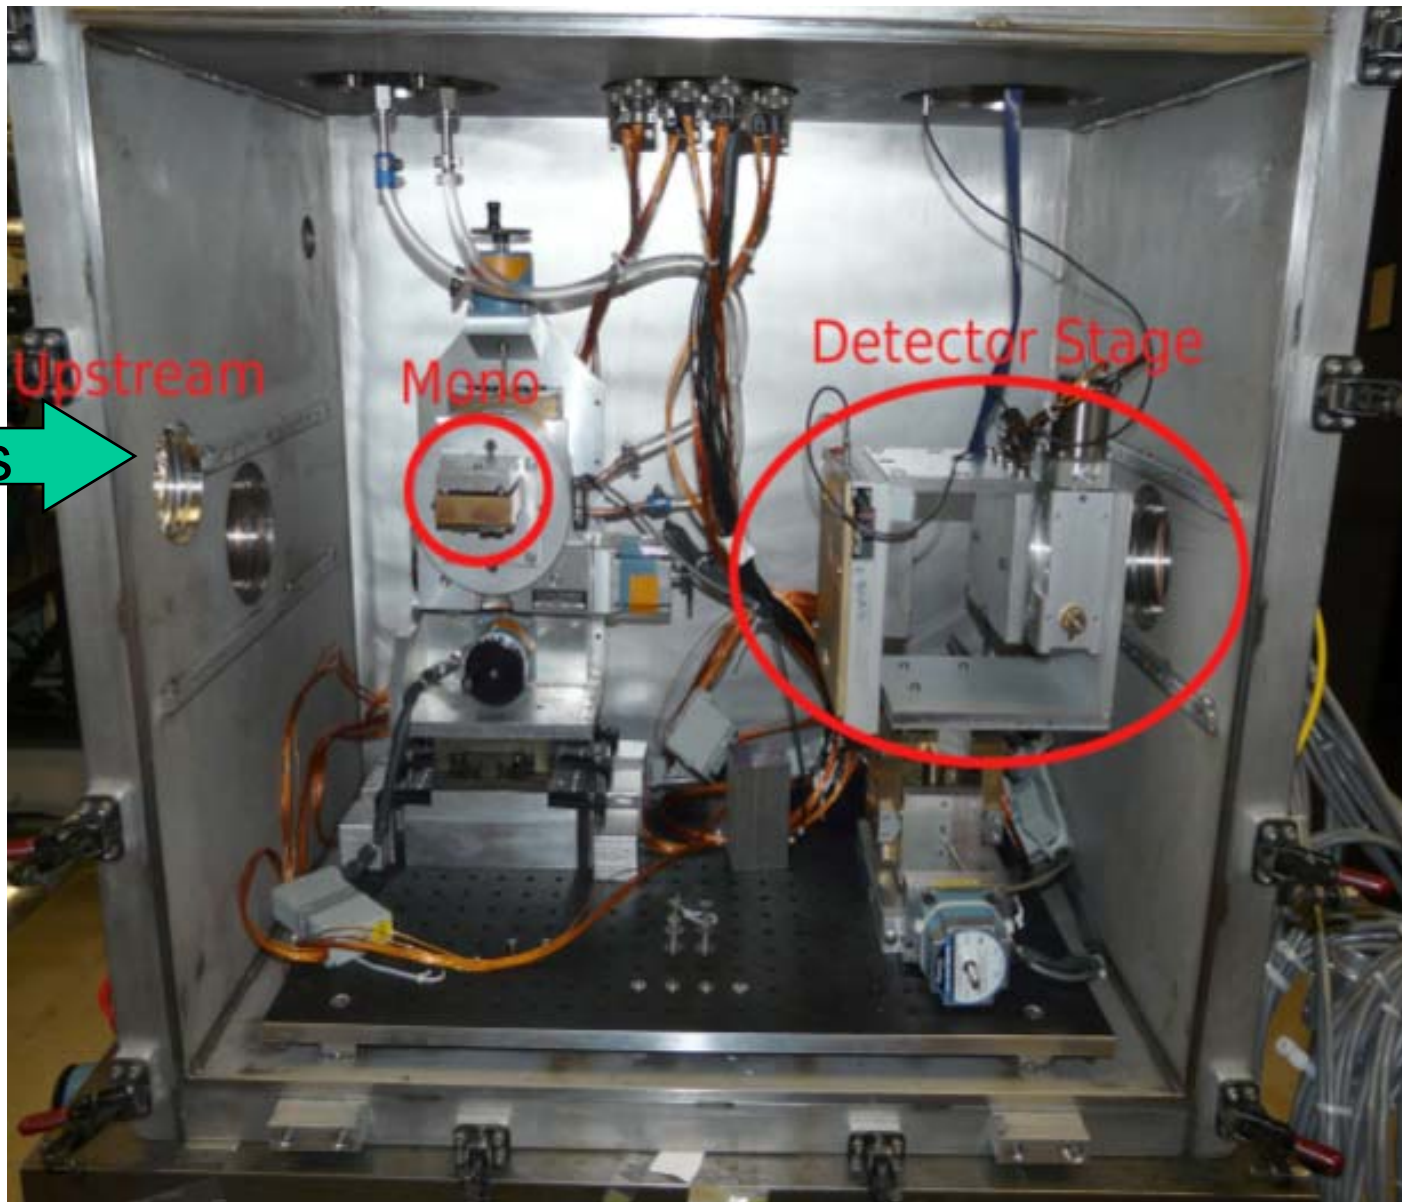





- Scan of coupling knob
- Coded aperture measurements
- Smallest recorded size:
 $\sim 15 \mu\text{m} \rightarrow \epsilon_v \sim 37\text{pm}$ (preliminary)

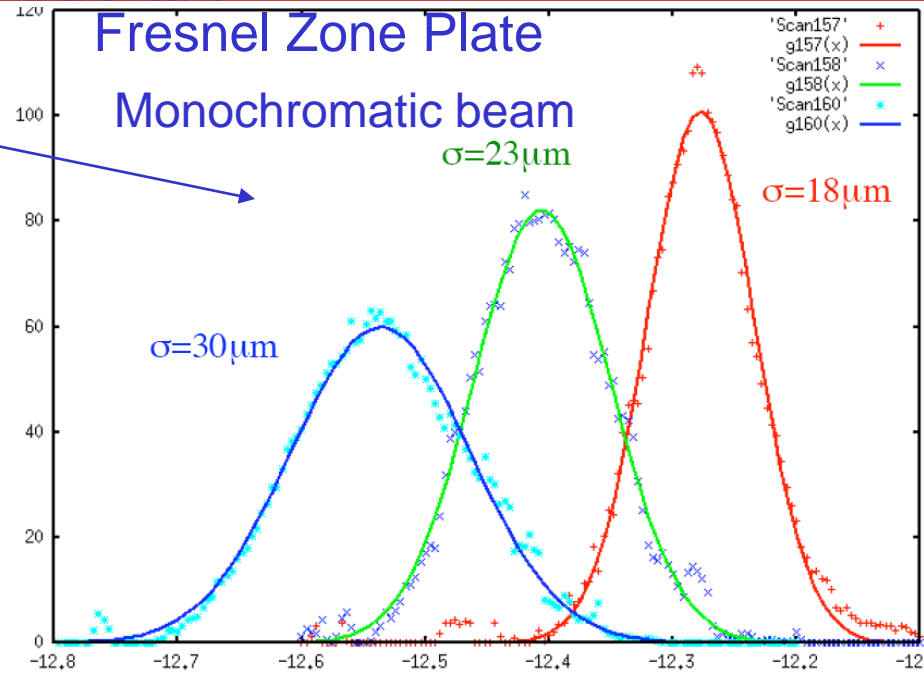


Simulations

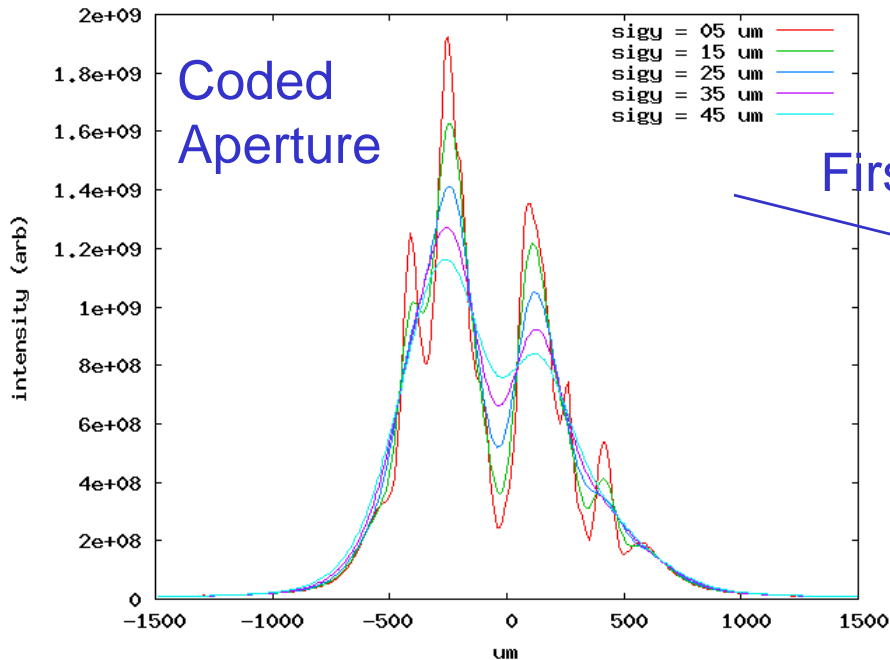


First measurement

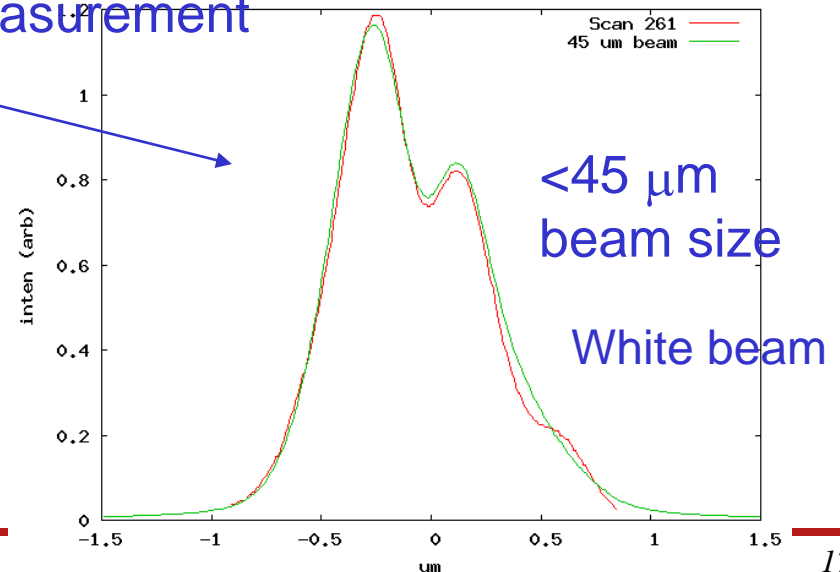

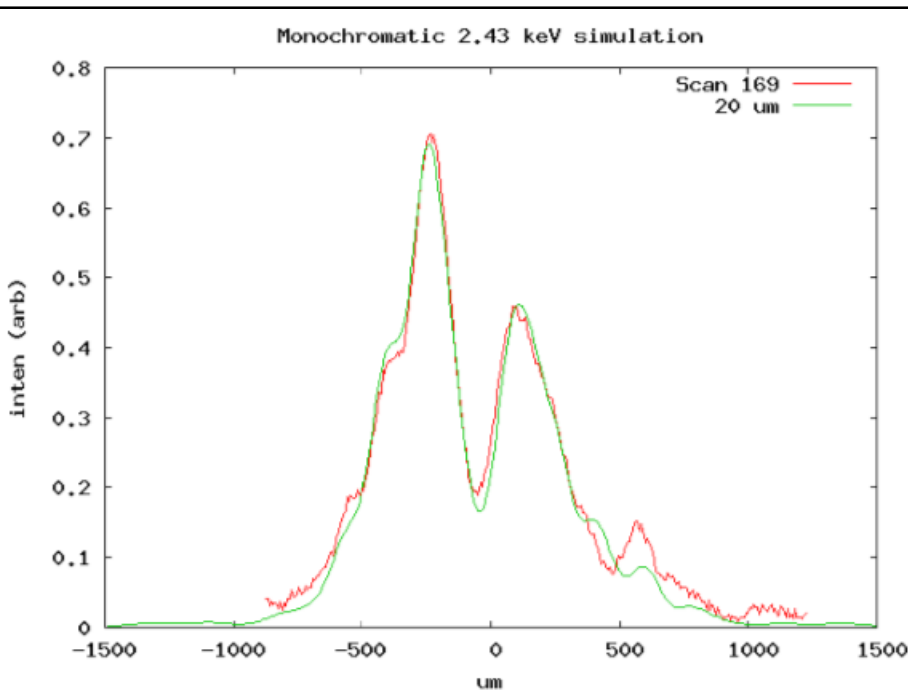

CESR condition
same as for 18um
FZP

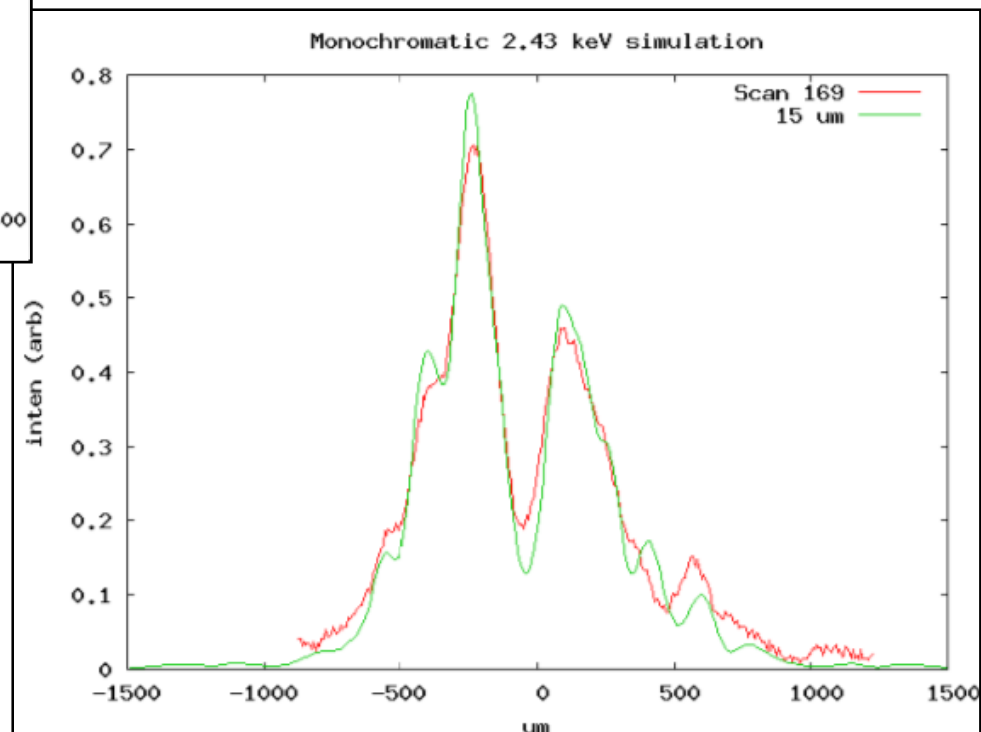

All measurements with single diode
Diode array will provide “real” time
beam size measurement



Measure beam size vs coupling/dispersion knobs

Linear combinations of skew quad correctors yield closed dispersion/coupling bumps in the damping wigglers and are used to tune vertical emittance

Betasing 1/2 - L0 wigglers


Betasing 3/4 - East arc wigglers

Betasing 5/6 - West arc wigglers

Beam size is measured with the Xray beam size monitor

Knob setting = 0 corresponds to conditions after low emittance tuning procedure.

The spread ($37\text{pm} < \epsilon_v < 60\text{pm}$) in *minimum* beam size is presumably due to knob hysteresis

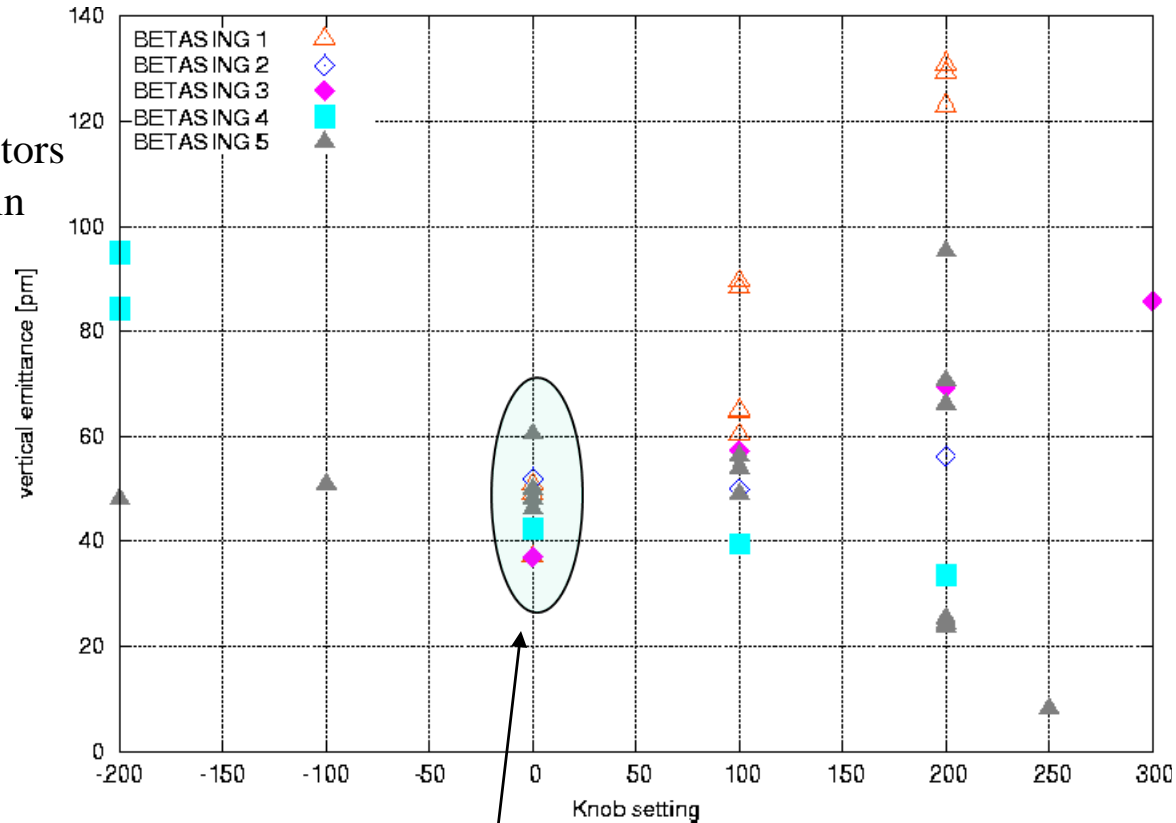

~minimum




Consider the dependence of beam size on *Betasing 1* (the knob that effects η, η' in the L0 wigglers)

Model dependence of vertical emittance on *Betasing 1* is indicated by the black circles in the plot.

We assume *Betasing 1* = 0 corresponds to zero vertical emittance. (The model machine)

$$(\epsilon \sim \eta_v^2)$$

The measured beam size is indicated by the triangles

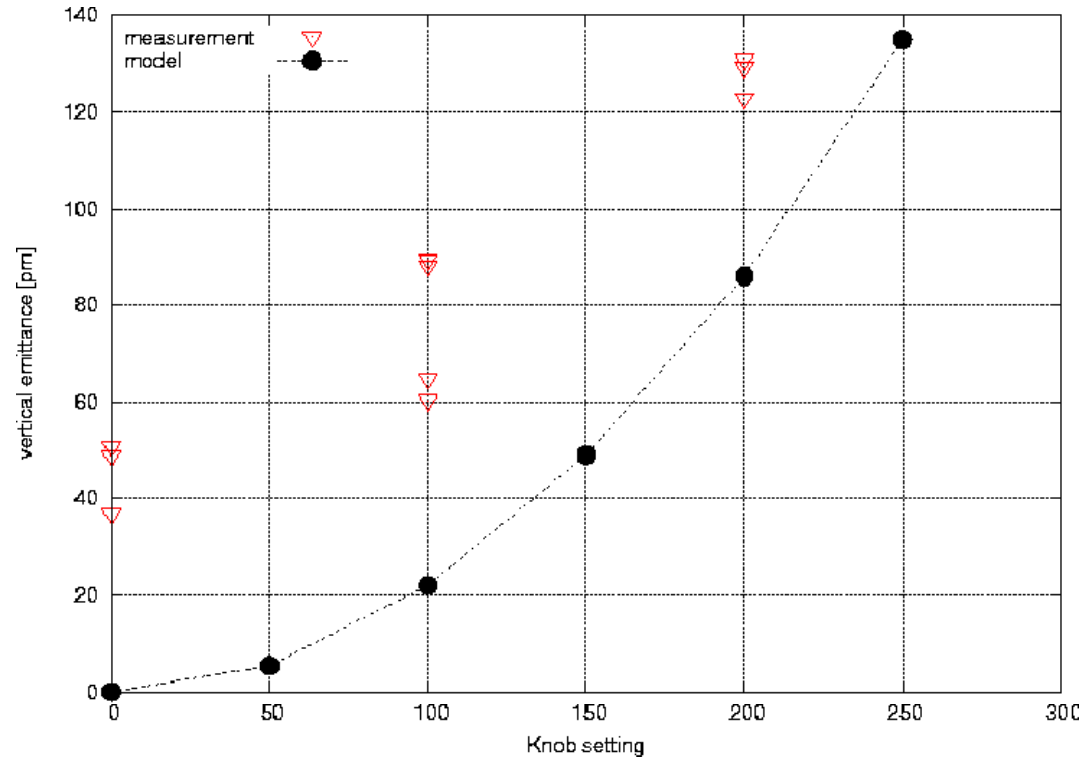




If we assume a residual $\eta_v \sim 1.7\text{cm}$
then $\epsilon_v(0) \sim 35\text{pm}$
(we measure residual $\eta_v \sim 2\text{cm}$)

Again, according to the model
calculation, dependence of ϵ_v on
Betasing 1 is black circles

Model and measurement are
in reasonable agreement

Conclusion from lifetime and
Xbsm measurements is that
 $\epsilon_v \sim 35\text{pm}$

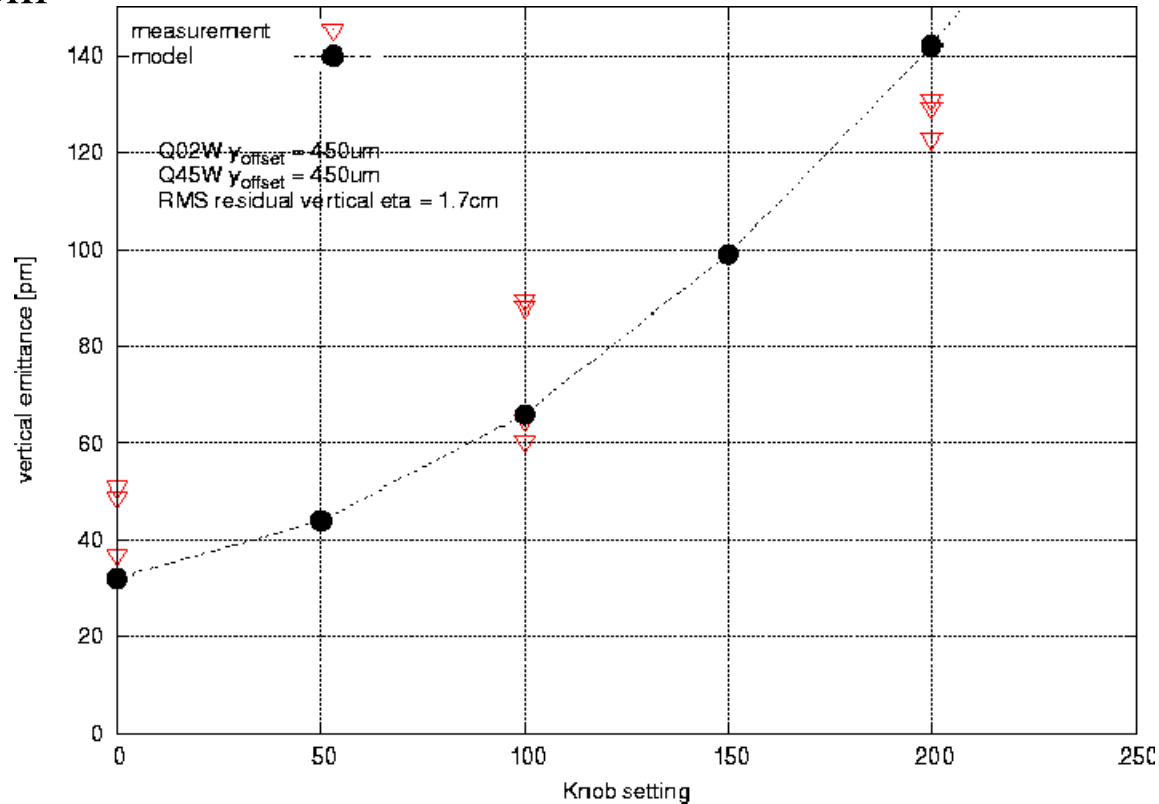



Low emittance tuning

- limited by finite η_v
- Identification of the source requires better measurement

Consider the effect of sextupole misalignment

The measurement

1. Correct (flatten) orbit
2. Correct coupling with skew quads
3. Measure β -phase and coupling
4. Turn off all sextupoles and re-Measure β -phase and coupling


The RMS phase difference is $\sim 1^\circ$

The RMS coupling difference is $\sim 4.2\%$

The measured coupling corresponds to systematic sextupole vertical offset of $\sim 1\text{mm}$

Direct measurement suggest some such offset!

Data: sextupoles off
Ref: sextupoles on

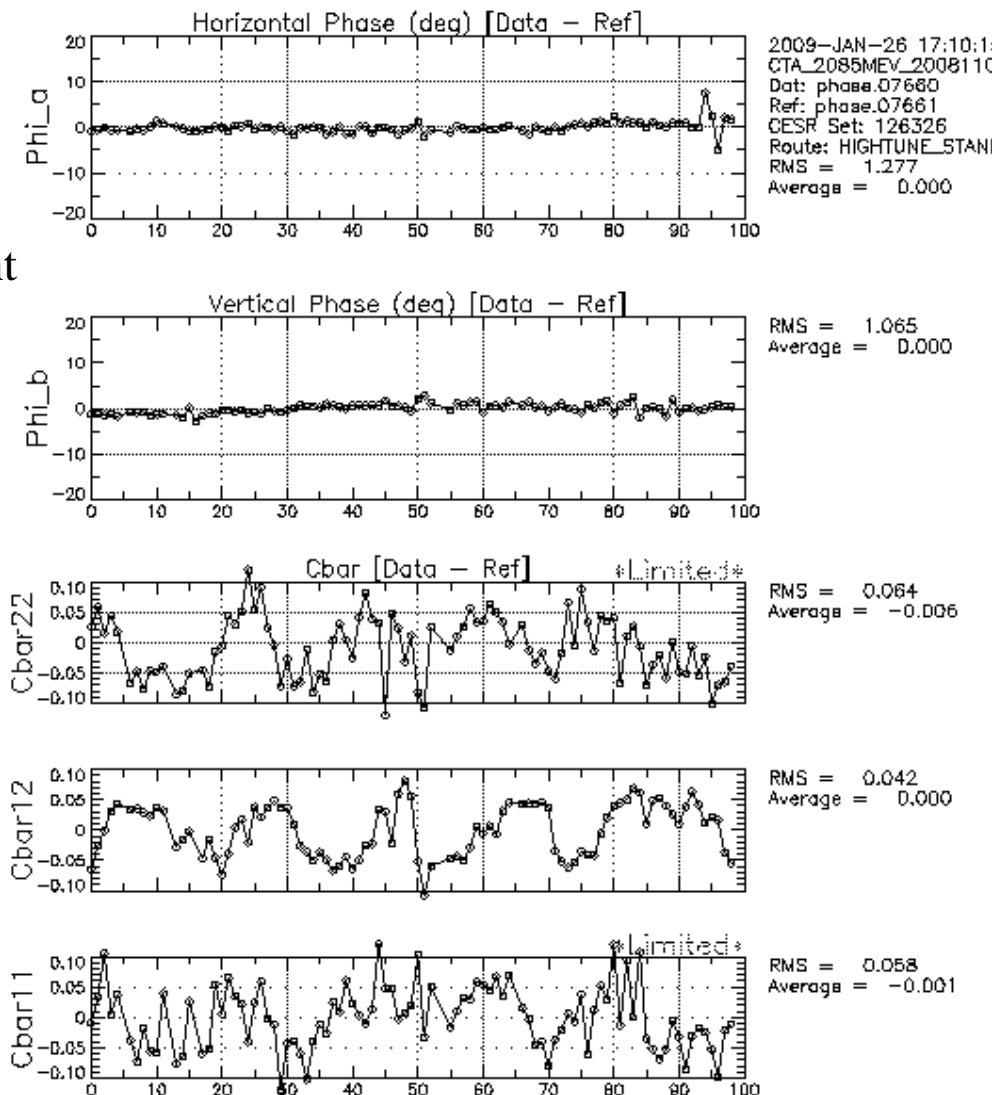



Analysis tools

CESRV is the code that provides

- access to control system to make measurements of orbit, β -phase, transverse coupling, dispersion
- analysis of measurements
(wave analysis, fitting [model to measurement], calibration, etc.)
- access to the control system to load corrections to steerings, quadrupoles, skew quads, sextupoles ...
- data manipulation - plotting, comparison, bookkeeping, etc.

CESRV runs on linux (as well as VMS)

- Linux / control system communication is transparent to user

> Real time measurement/analysis/correction



- Survey and alignment
 - Quadrupole offsets and rolls, and bend rolls within tolerances
- Quadrupole focusing errors corrected
- Coupling corrected $< 1\%$
- Vertical dispersion $\sim 2\text{cm}$ (the goal is 1cm)
- Measured vertical emittance (lifetime and XBSM) $\sim 35\text{pm}$
(\rightarrow corresponds to $\eta_v(\text{RMS}) \sim 1.8\text{cm}$)
- \rightarrow Residual vertical dispersion dominates vertical emittance
- Our ability to correct vertical dispersion limited by BPM resolution
- Implementation of digital BPM electronics (May-June 09 run) will provide required resolution/reproducibility
[Candidate source of dispersion is sextupole misalignment
(Developing a plan for measuring and correcting offset errors)]
- Analysis software and infrastructure is flexible, well tested, and mature



J. Alexander, M. Billing, J. Calvey, S. Chapman, G. Codner, J. Crittenden, J. Dobbins, G. Dugan, M. Forster, R. Gallagher, S. Gray, S. Greenwald, D. Hartill, W. Hopkins, J. Kandaswamy, D. Kreinick, Y. Li, X. Liu, J. Livezey, V. Medjidzade, R. Meller, S. Peck, D. Peterson, M. Rendina, D. Rice, N. Rider, D. Sagan, J. Sexton, J. Shanks, J. Sikora, K. Smolenski, C. Strohman, A. Temnykh, M. Tigner, W. Whitney, H. Williams, S. Vishniakou, T. Wilksen
(*CLASSE, Cornell University*)

K. Harkay (*Argonne National Lab*)

R. Holtzapple (*California Polytechnic Institute*)

E. Smith (*CCMR, Cornell University*)

C. Connolly, E. Fontes, A. Lyndaker, P. Revesz, J. Savino, R. Seeley (*CHESS, Cornell University*)

J. Jones, A. Wolski (*Cockcroft Institute*)

Y. He, M. Ross, C. Y. Tan, R. Zwaska (*Fermi National Accelerator Laboratory*)

J. Flanagan, P. Jain, K. Kanazawa, K. Ohmi, Y. Suetsugu (*KEK Accelerator Laboratory*)

J. Byrd, C. M. Celata, J. Corlett, S. De Santis, M. Furman, A. Jackson, R. Kraft, D. Munson, G. Penn, D. Plate, A. Rawlins, M. Venturini, M. Zisman (*Lawrence Berkeley National Laboratory*)

D. Kharakh, M. Pivi, L. Wang (*SLAC National Accelerator Laboratory*)



AC dispersion measurement


$$\eta_v(\text{AC})$$

Achieving emittance target depends on reducing vertical dispersion to $< 1\text{cm}$. Presently limited by marginal quality of measurement


AC technique may give Requisite resolution but not yet

$$\eta_v(\text{DC})$$


ac and dc eta

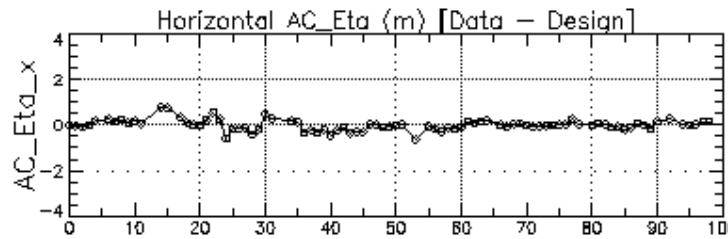


2009-JAN-24 14:43:31
CTA_2085MEV_20081107
Dat: ac_eta.00059
Ref: NONE
CESR Set: 126309
Route: HIGHTUNE_STANDARD
RMS = 0.237
Average = 0.000

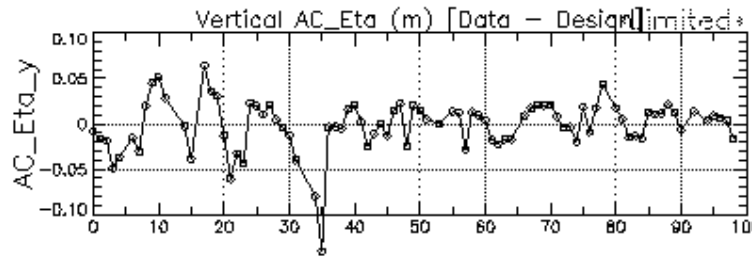

RMS = 0.028
Average = -0.001

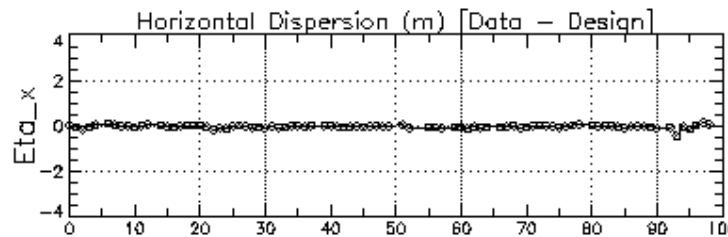

2009-JAN-24 14:47:23
CTA_2085MEV_20081107
Dat: eta.00824
Ref: NONE
CESR Set: 126309
RMS = 0.078
Average = -0.037

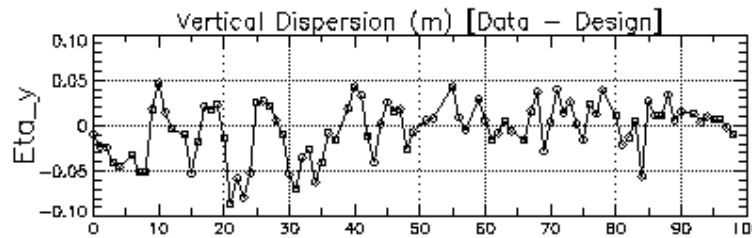

RMS = 0.030
Average = -0.004

