


# The ILD concept from linear to circular colliders



I.Laktineh, UCBL-IP2I

# Prelude

- International Large Collider (ILD) was born within the ILC project
- ILD was optimized for ILC duty cycle mode and for the different expected CM energies of ILC (250, 500 and 1000 GeV)
- ILD was used as the starting point for the first CEPC baseline detector
- Last year ILD collaboration decided to study the possibility to propose ILD for other colliders, namely the FCCee with the main challenges coming from the Tera-Z run scenario.

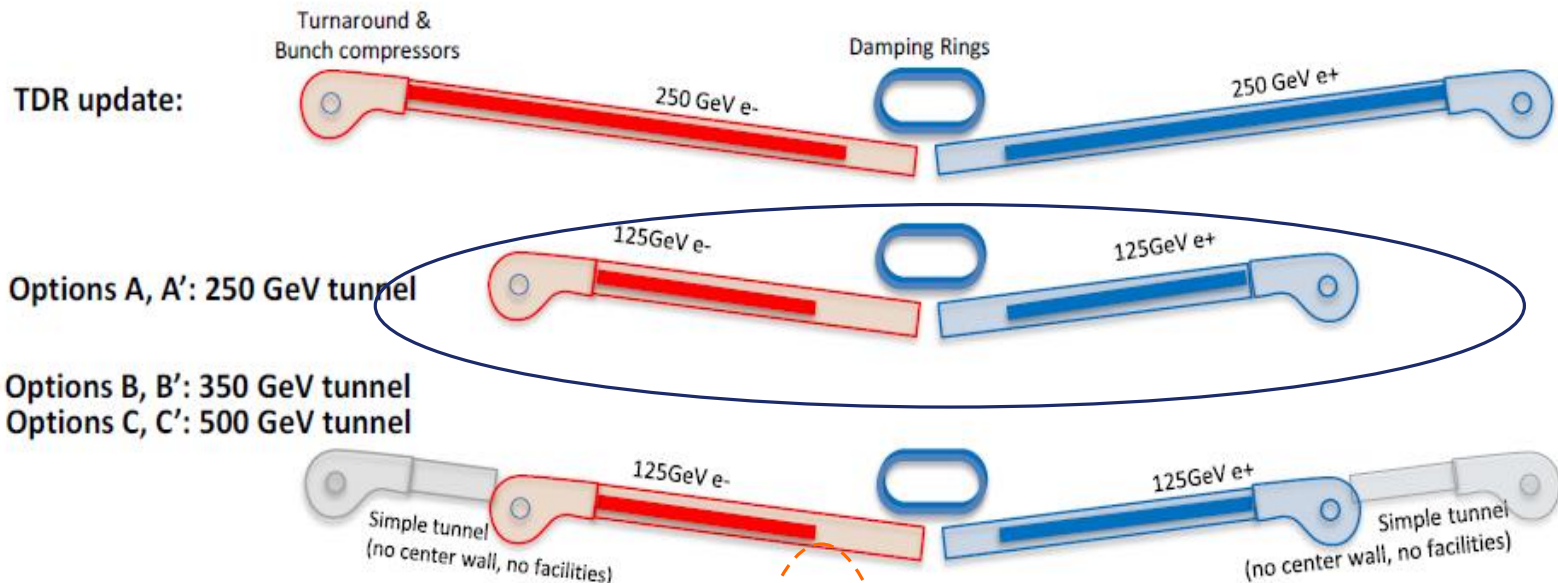

Quantity	Symbol	Unit	Initial	$\mathcal{L}$ Upgrade	TDR	Upgrades	
Centre of mass energy	$\sqrt{s}$	GeV	250	250	250	500	1000
Luminosity	$\mathcal{L}$	$10^{34} \text{cm}^{-2} \text{s}^{-1}$	1.35	2.7	0.82	1.8/3.6	4.9
Polarisation for $e^-$ ( $e^+$ )	$P_-$ ( $P_+$ )		80 % (30 %)	80 % (30 %)	80 % (30 %)	80 % (30 %)	80 % (20 %)
Repetition frequency	$f_{\text{rep}}$	Hz	5	5	5	5	4
Bunches per pulse	$n_{\text{bunch}}$	1	1312	2625	1312	1312/2625	2450
Bunch population	$N_e$	$10^{10}$	2	2	2	2	1.74
Linac bunch interval	$\Delta t_b$	ns	554	366	554	554/366	366
Beam current in pulse	$I_{\text{pulse}}$	mA	5.8	5.8	8.8	5.8	7.6
Beam pulse duration	$t_{\text{pulse}}$	$\mu\text{s}$	727	961	727	727/961	897
Average beam power	$P_{\text{ave}}$	MW	5.3	10.5	10.5	10.5/21	27.2
Norm. hor. emitt. at IP	$\gamma\epsilon_x$	$\mu\text{m}$	5	5	10	10	10
Norm. vert. emitt. at IP	$\gamma\epsilon_y$	nm	35	35	35	35	30
RMS hor. beam size at IP	$\sigma_x^*$	nm	516	516	729	474	335
RMS vert. beam size at IP	$\sigma_y^*$	nm	7.7	7.7	7.7	5.9	2.7
Luminosity in top 1 %	$\mathcal{L}_{0.01}/\mathcal{L}$		73 %	73 %	87.1 %	58.3 %	44.5 %
Energy loss from beamstrahlung	$\delta_{\text{BS}}$		2.6 %	2.6 %	0.97 %	4.5 %	10.5 %
Site AC power	$P_{\text{site}}$	MW	129		122	163	300
Site length	$L_{\text{site}}$	km	20.5	20.5	31	31	40

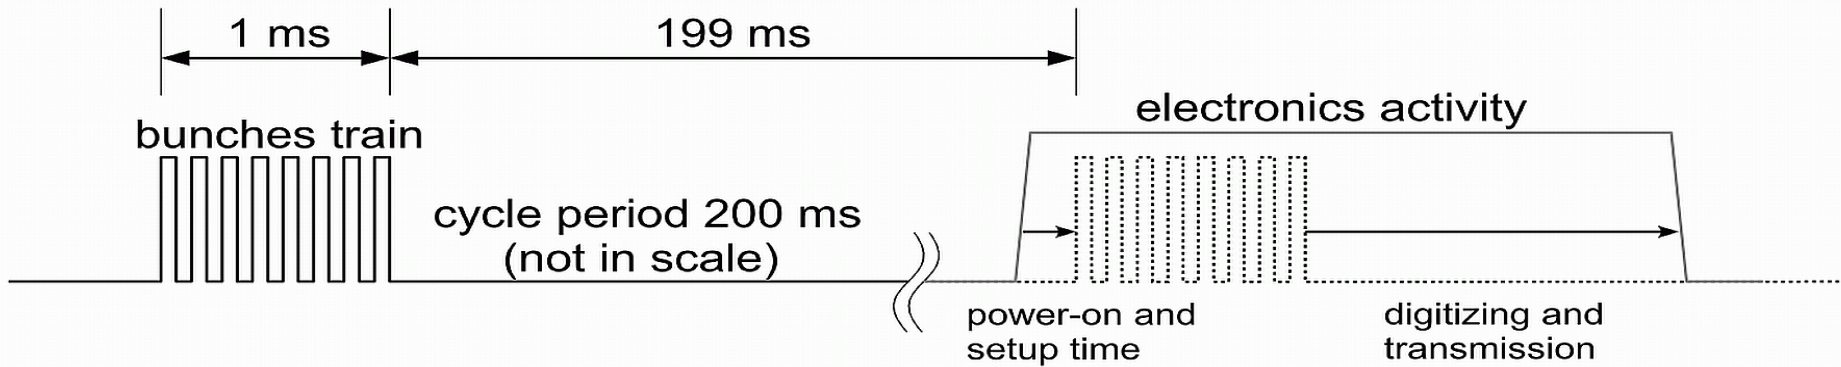
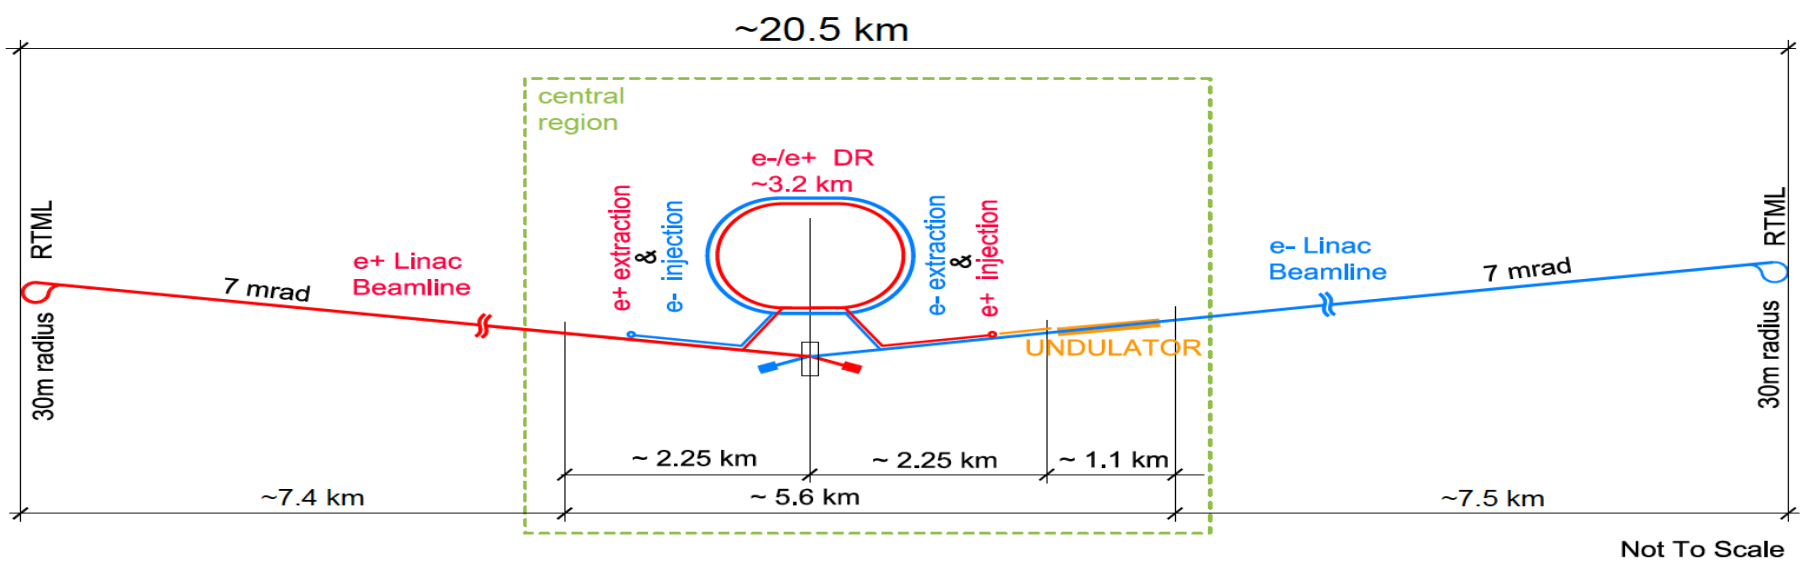


Train of 1ms duration every 200 ms (**5 Hz**), **1312 BC/train**


- Readout electronics is conceived to read out all the events (triggerless mode) during the bunch crossings, store them and then transfer them just after.
- Electronics is switched off after data transfer until a new train (**a factor 100 of power reduction**)
  - almost no cooling → low material budget

# Philosophy of ILD

- ❑ Detectors should be a **precision** and **discovery** tool beyond the LHC scope.
- ❑ Relevant Physics phenomena in the TeV energy range are associated to multi jet final states  
 → **Jet energy measurement** is the most important item.

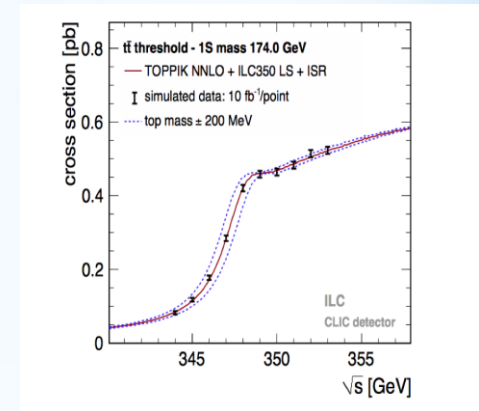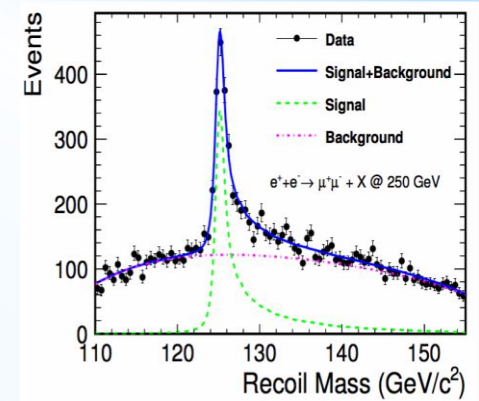


Energy	Reaction	Physics Goal
250 GeV	$e^+e^- \rightarrow Z\bar{\nu}$	precision Higgs couplings
350-400 GeV	$e^+e^- \rightarrow t\bar{t}$	top quark mass and couplings
	$e^+e^- \rightarrow WW$	precision $W$ couplings
	$e^+e^- \rightarrow \nu\bar{\nu}h$	precision Higgs couplings
500 GeV	$e^+e^- \rightarrow f\bar{f}$	precision search for $Z'$
	$e^+e^- \rightarrow t\bar{t}h$	Higgs coupling to top
	$e^+e^- \rightarrow Zh\bar{h}$	Higgs self-coupling
	$e^+e^- \rightarrow \tilde{\chi}\tilde{\chi}$	search for supersymmetry
	$e^+e^- \rightarrow AH, H^+H^-$	search for extended Higgs states
700-1000 GeV	$e^+e^- \rightarrow \nu\bar{\nu}hh$	Higgs self-coupling
	$e^+e^- \rightarrow \nu\bar{\nu}VV$	composite Higgs sector
	$e^+e^- \rightarrow \nu\bar{\nu}t\bar{t}$	composite Higgs and top
	$e^+e^- \rightarrow t\bar{t}^*$	search for supersymmetry

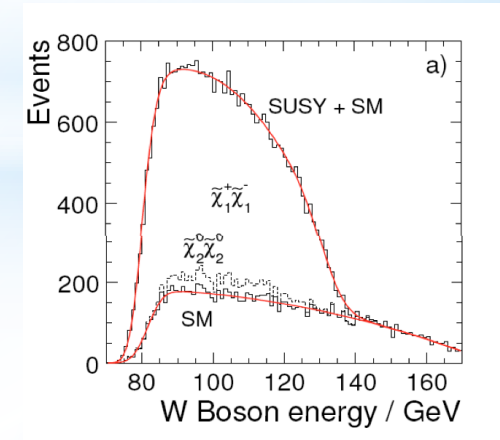



## Philosophy of the ILD detectors

- ❑ Detectors should be **precision** and **discovery** tools beyond the LHC scope.
- ❑ Relevant Physics phenomena in the TeV energy range are associated to multi jet final states → **Jet energy measurement** is the most important item.
- ❑ **Particle Flow Algorithm** is adopted in both SiD and ILD concepts. **PFA**: Construction of individual particles and estimation of their energy/momentum in the most appropriate sub-detector.


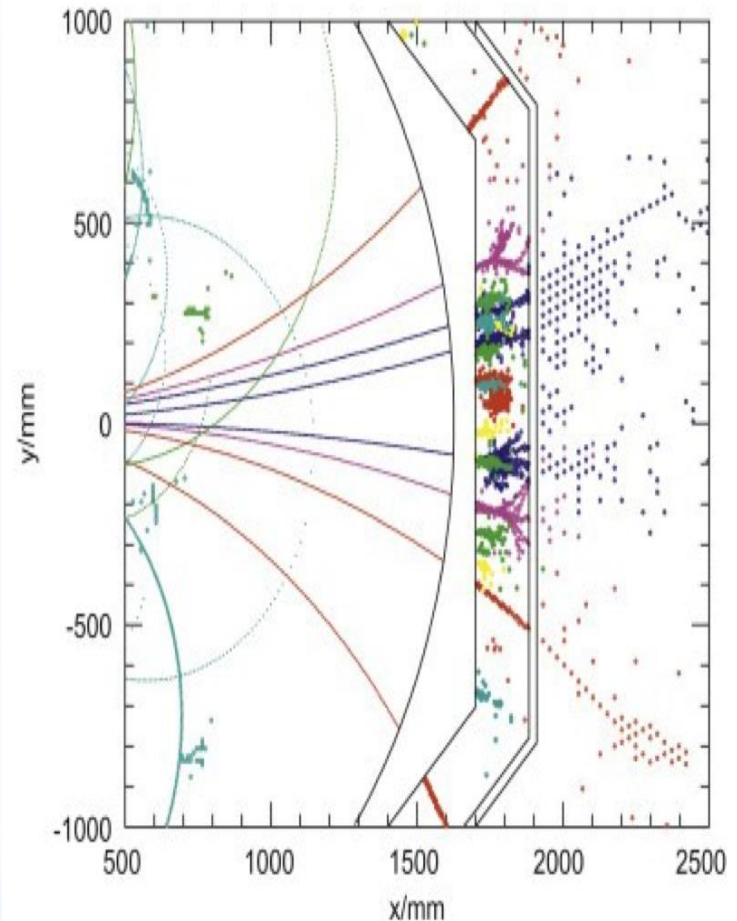


PFA requires the different sub-detectors including calorimeters to be highly granular. PFA uses their granularity to separate **neutral** from **charged** contributions and exploits the **tracking system** to measure with precision the energy/momentum of charged particles.


# Philosophy of ILD : Requirements

- ❑ Vertex detector : **excellent resolution**  
 $\sigma_{IP}(r\phi) = 5+10/(p \sin^{2/3}(\theta)) \mu\text{m}$   
b-tag, c-tag,... for  $H \rightarrow bb, cc, \tau\tau$  studies
- ❑ Tracker : **excellent precision** measurement of  $p_t$   
 $\sigma(1/p_t) = 10^{-5} \text{ GeV}^{-1}$   
H mass recoil,  $e^+ e^- \rightarrow H Z \rightarrow \mu^+ \mu^- + \text{anything}$
- ❑ Calorimeters : **highly granular** but still providing good measurement of neutrals  
 $\sigma_E/E = 30\%/\sqrt{E}$

The whole detector should be hermitic, compact with moderate power consumption

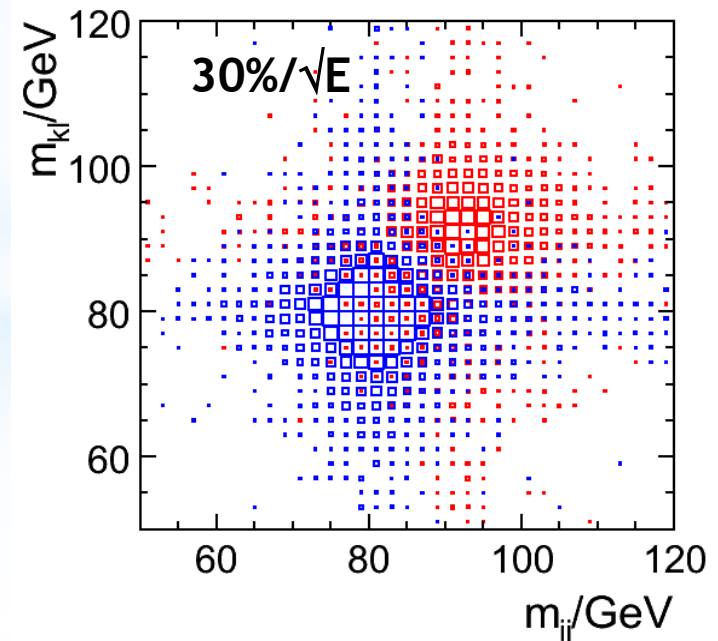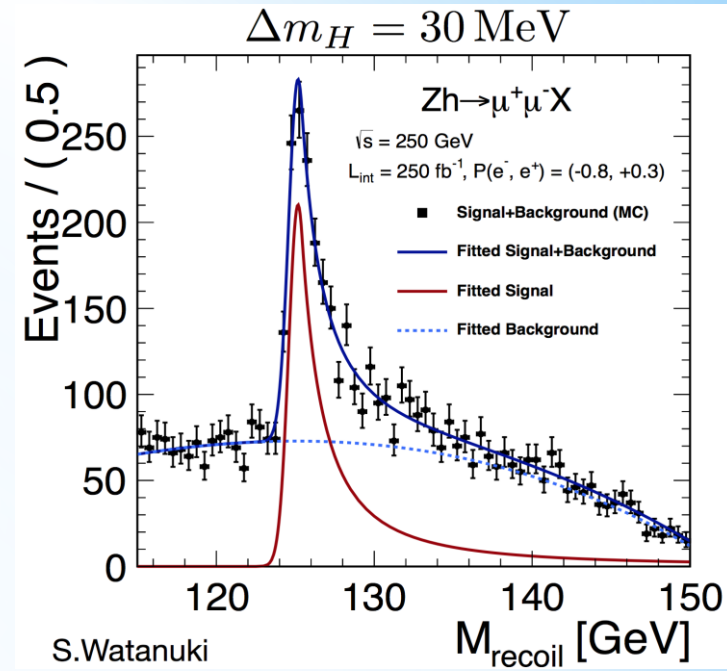

# ILD

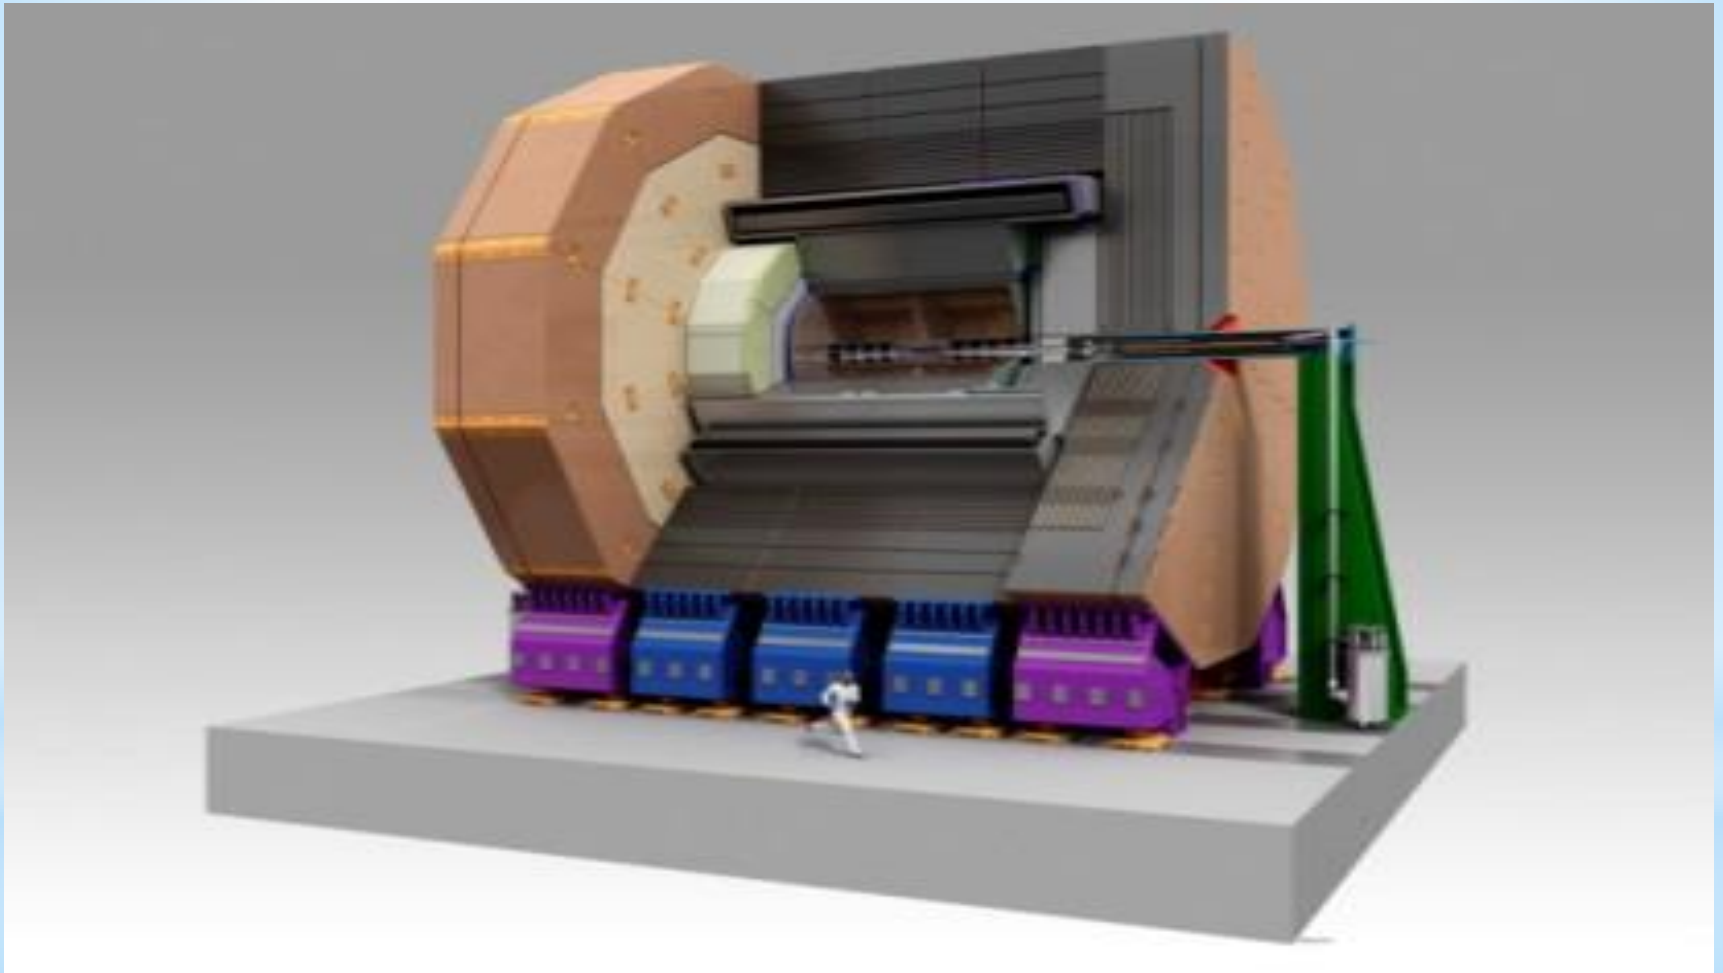



# ILD

## **Precision vertex detectors**

CMOS MAPs, FPCCD, DEPFET

## **Tracker**

TPC (GEM,MMEGAS,MAPs)  
many measurement points

## **Calorimeters**

Forward Calorimeter: Si-W, GaAs-W..  
ECAL: Si-W, Sc-W  
AHCAL: Sc-Steel, SDHCAL-GRPC,..

## **Size&Magnet**



Large/Small size options, 3.5 Tesla

	ILD
R(in) Vertex	16 mm
R(out) tracker	1808 mm
N(tracker hits)	<228>
X(0) until ECAL	12% (barrel), 42% (EC)
R(out) HCAL	3973 mm
$\Lambda$ (until end of HCAL)	7 (min), 8.5 (max)
Coil inner radius	3440 mm
B(coil)	3.5 T
Outer Radius	7755 mm
Total length	6620 mm

# Tracker Silicon detectors : ILD

## Central Si Tracker System (vertex detector)


- 3 ladders of double layers (6 pixel layers)
- $|\cos(\theta)| < .97$  for inner layer,  $|\cos(\theta)| < .9$  for outer layer
- Inner radius  $\sim 1.6$  cm, outer radius  $\sim 6$  cm
- **$3\mu\text{m}$**  resolution in the inner layer
- Material budget  $\sim 0.3 X_0/\text{ladder layer}$  : light support and air-based cooling system.
- **A pixel occupancy not exceeding a few %**

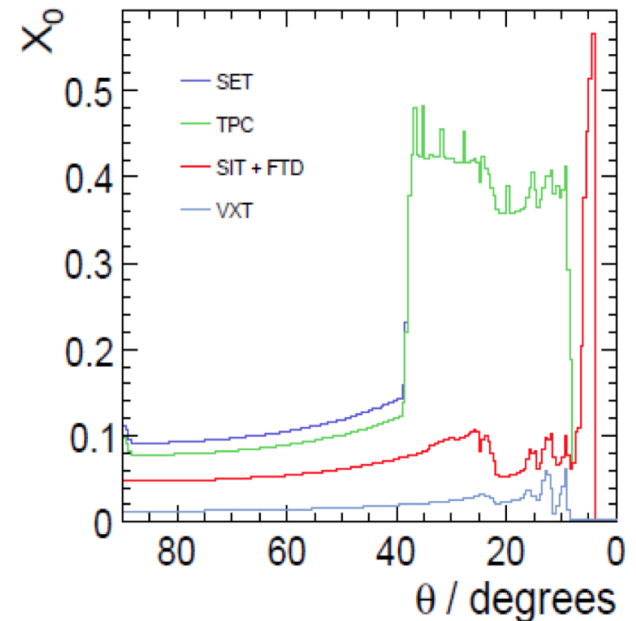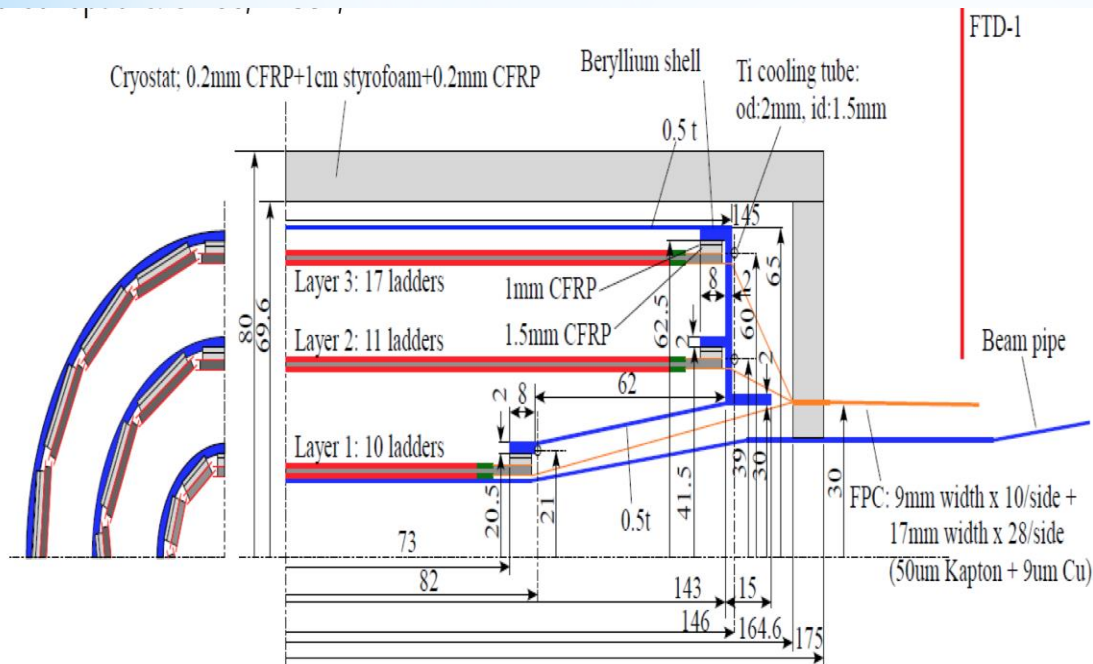


## ILD TPC tracker

Time Projection Chamber (TPC) is chosen as the central tracker of ILD



- ❖ 3D tracks ( $r\phi z$ ) can be built thanks to many **hits ( $\sim 200/\text{Track}$ )**
- ❖  $\sigma(r\phi)$  of **100  $\mu\text{m}$**  (60  $\mu\text{m}$  at  $z=0$ ) is expected
- ❖  $\sigma(z)$  of **1400  $\mu\text{m}$**  (400  $\mu\text{m}$  at  $z=0$ ) is expected
- ❖  $\sigma(1/p_t) \sim 10^{-4} \text{ GeV}^{-1}$
- ❖  $dE/dx$  information is provided (particle identification)
- ❖ Readout pad size  $\sim 1 \times 6 \text{ mm}^2 \rightarrow 10^6$  pads/side
- ❖ Material budget : 5% $X_0$  in central region and less than **0.25  $X_0$**  in the endplate region
- ❖ Cooling is needed: two-phase  $\text{CO}_2$  is a possibility.
- ❖ Two main options for gas amplification are considered : GEM, Micromegas and more granular one (GridPix)

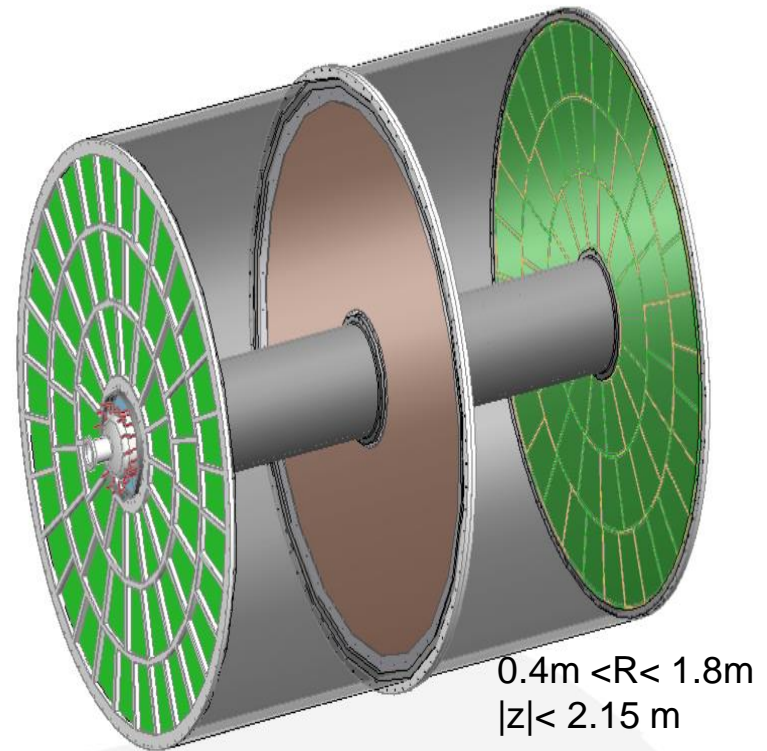

**MicromEGAS**

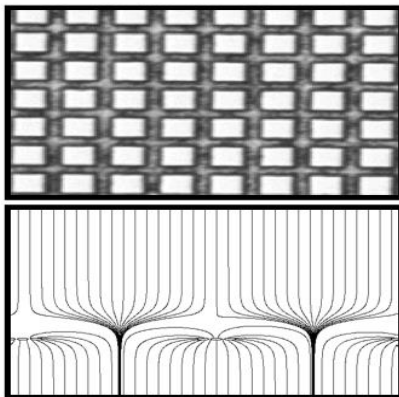

**GEM**

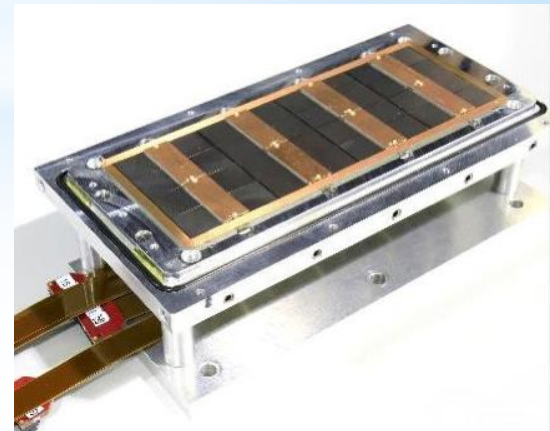
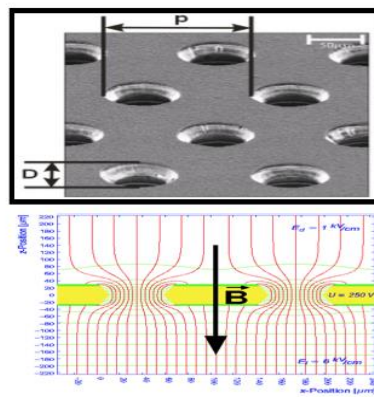





## ECAL for ILD

30 layers of tungsten with three different thickness representing ( $24X_0$ ) interleaved with

-Pixellated Silicon of  $5 \times 5 \text{ mm}^2$  with silicon wafer thickness (300-500  $\mu\text{m}$ )

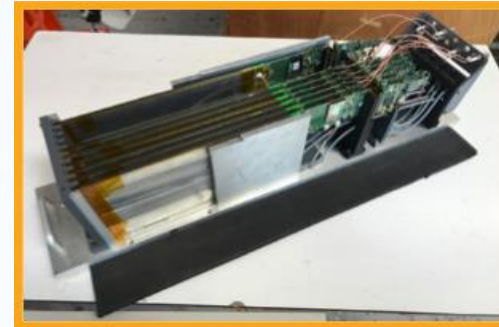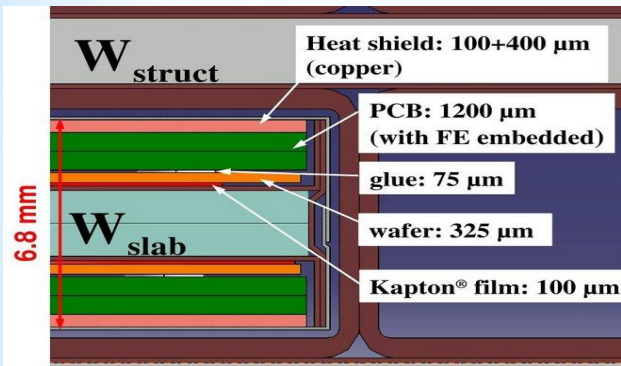


-Doublets each made of two layers of scintillator bars of  $45 \times 5 \times 2 \text{ mm}^3$  with in horizontal position for one and vertical position for the other

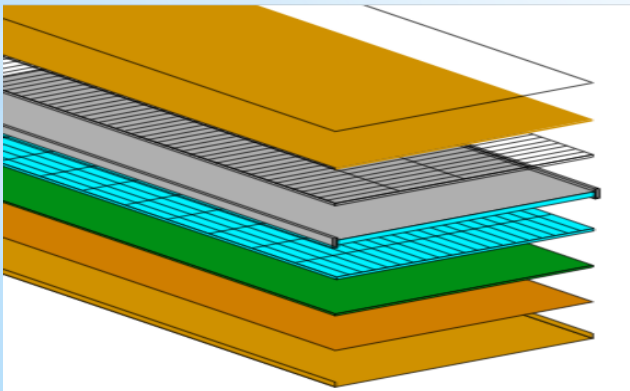





## HCAL for ILD

48 layers of 2 cm stainless steel ( $6 \lambda$ ) interleaved with planes made of  $3 \times 3 \times .3 \text{ cm}^3$  tiles read out with SiPM

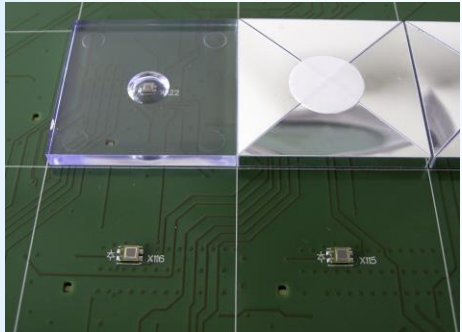

of Glass RPC and their embedded readout 2-bit electronics allowing a lateral segmentation of  $1 \text{ cm}^2$

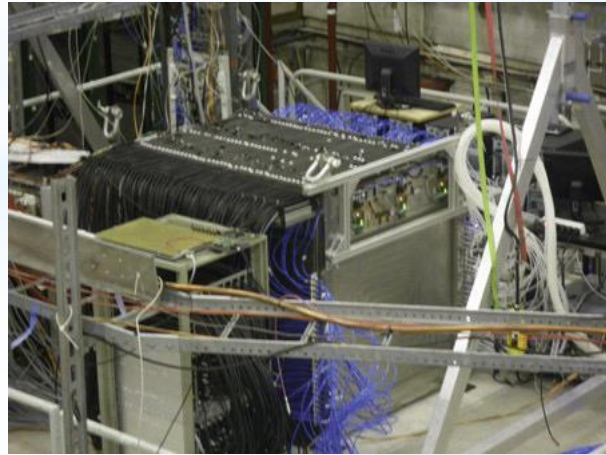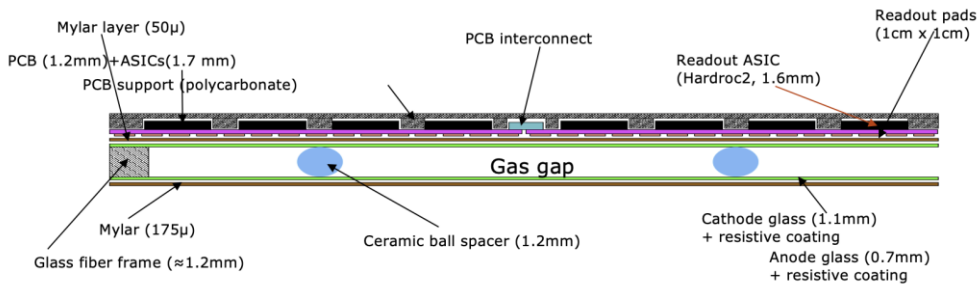

L2



L1

R1

R2

Outer active radius  $R = 195.2$  mm



pads: 1 - 64



## What one should do to adapt ILD detectors to circular colliders

- Vertex Detector
- Tracker: Inner and outer
- Calorimeters

# FCCee vs ILC MDI

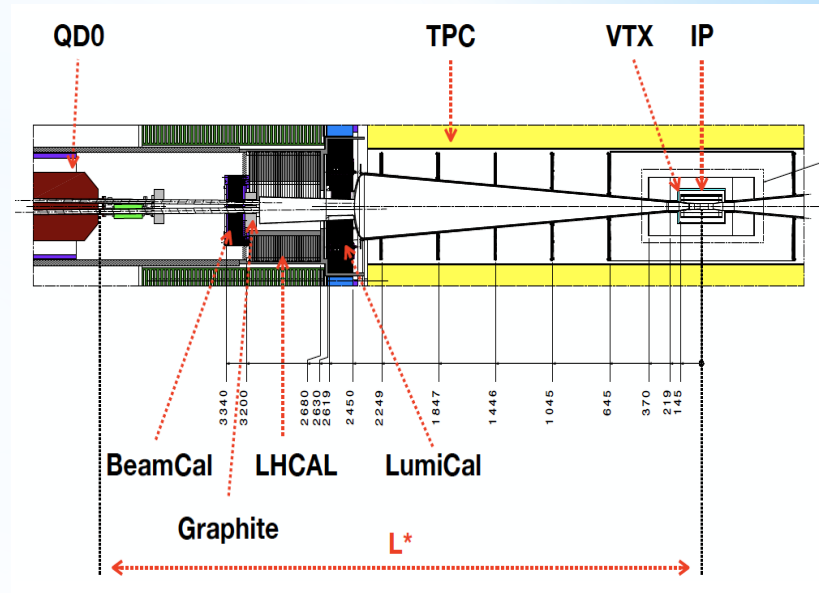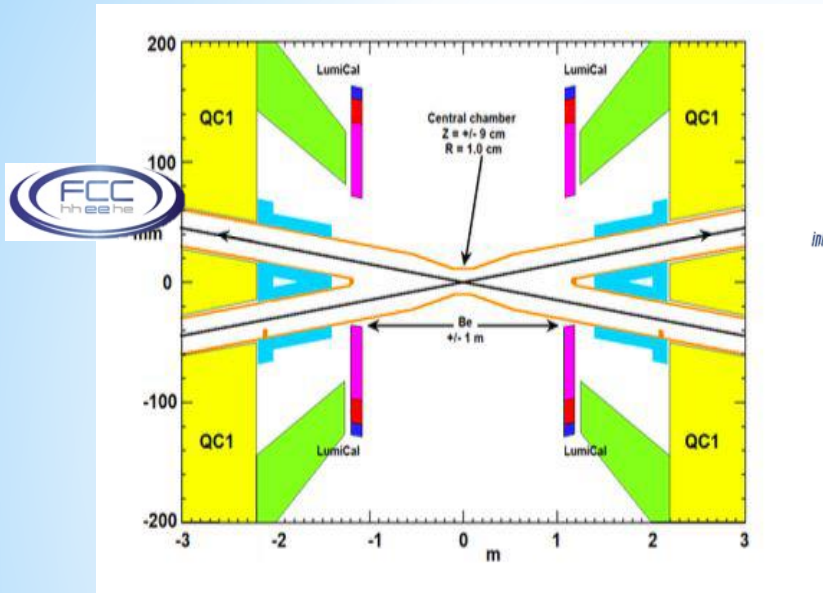

Crossing angle **30mrad**  
 $L^*$  **2m**: Final Quadrupole **inside** the detector  
 Solenoid magnetic field restricted to **2T** maximum  
 Lumical at **~1m** from IP  
 → Tracker acceptance:  $\cos\theta \sim 0.984$   
 Inner beam pipe radius **10mm**


Crossing angle **14 mrad**  
 $L^*$  **4.1 m**: Final Quadrupole **outside** the detector  
 Solenoid magnetic field **3.5 - 4 T**  
 Lumical at **~2.5m** from IP  
 Conical → Tracker acceptance:  $\cos\theta \sim 0.996$   
 Inner beam pipe radius **16 mm**




## Vertex detectors & Tracker


Collider	ILC		CLIC	FCCee			CEPC	
Bunch separation (ns)	330/550		0.5	20/990/3000			25/680	
Power Pulsing	yes		yes	no			no	
beamstrahlung	high		high	low			low	
Detector concept	SiD	ILC	CLICdet	CLD	IDEA	Lar	Baseline	IDEA
B Field (T)	5	3.5	4	2	2	2	3	2
Vertex	Si-Pixel	Si-Pixel	Si-Pixel	Si-Pixel	Si-Pixel	Si-Pixel	Si-Pixel	Si-Pixel
Vertex Rmin (mm)	16	16	31	12	12	12	16	16
Tracker	Si-strips	TPC	Si-Pixel	Si-Pixel	DC/Si-strips	DC/Si-strips or Si-Pixels	TPC or Strips	DC/Si-strips
Tracker Rmax (m)	1.25	1.8	1.5	2.2	2.0	2.0	1.8	2.1
Disks layers	4 + 4	2 + 5	6 + 7	3 + 7	3 (150 mrad)		2+6	



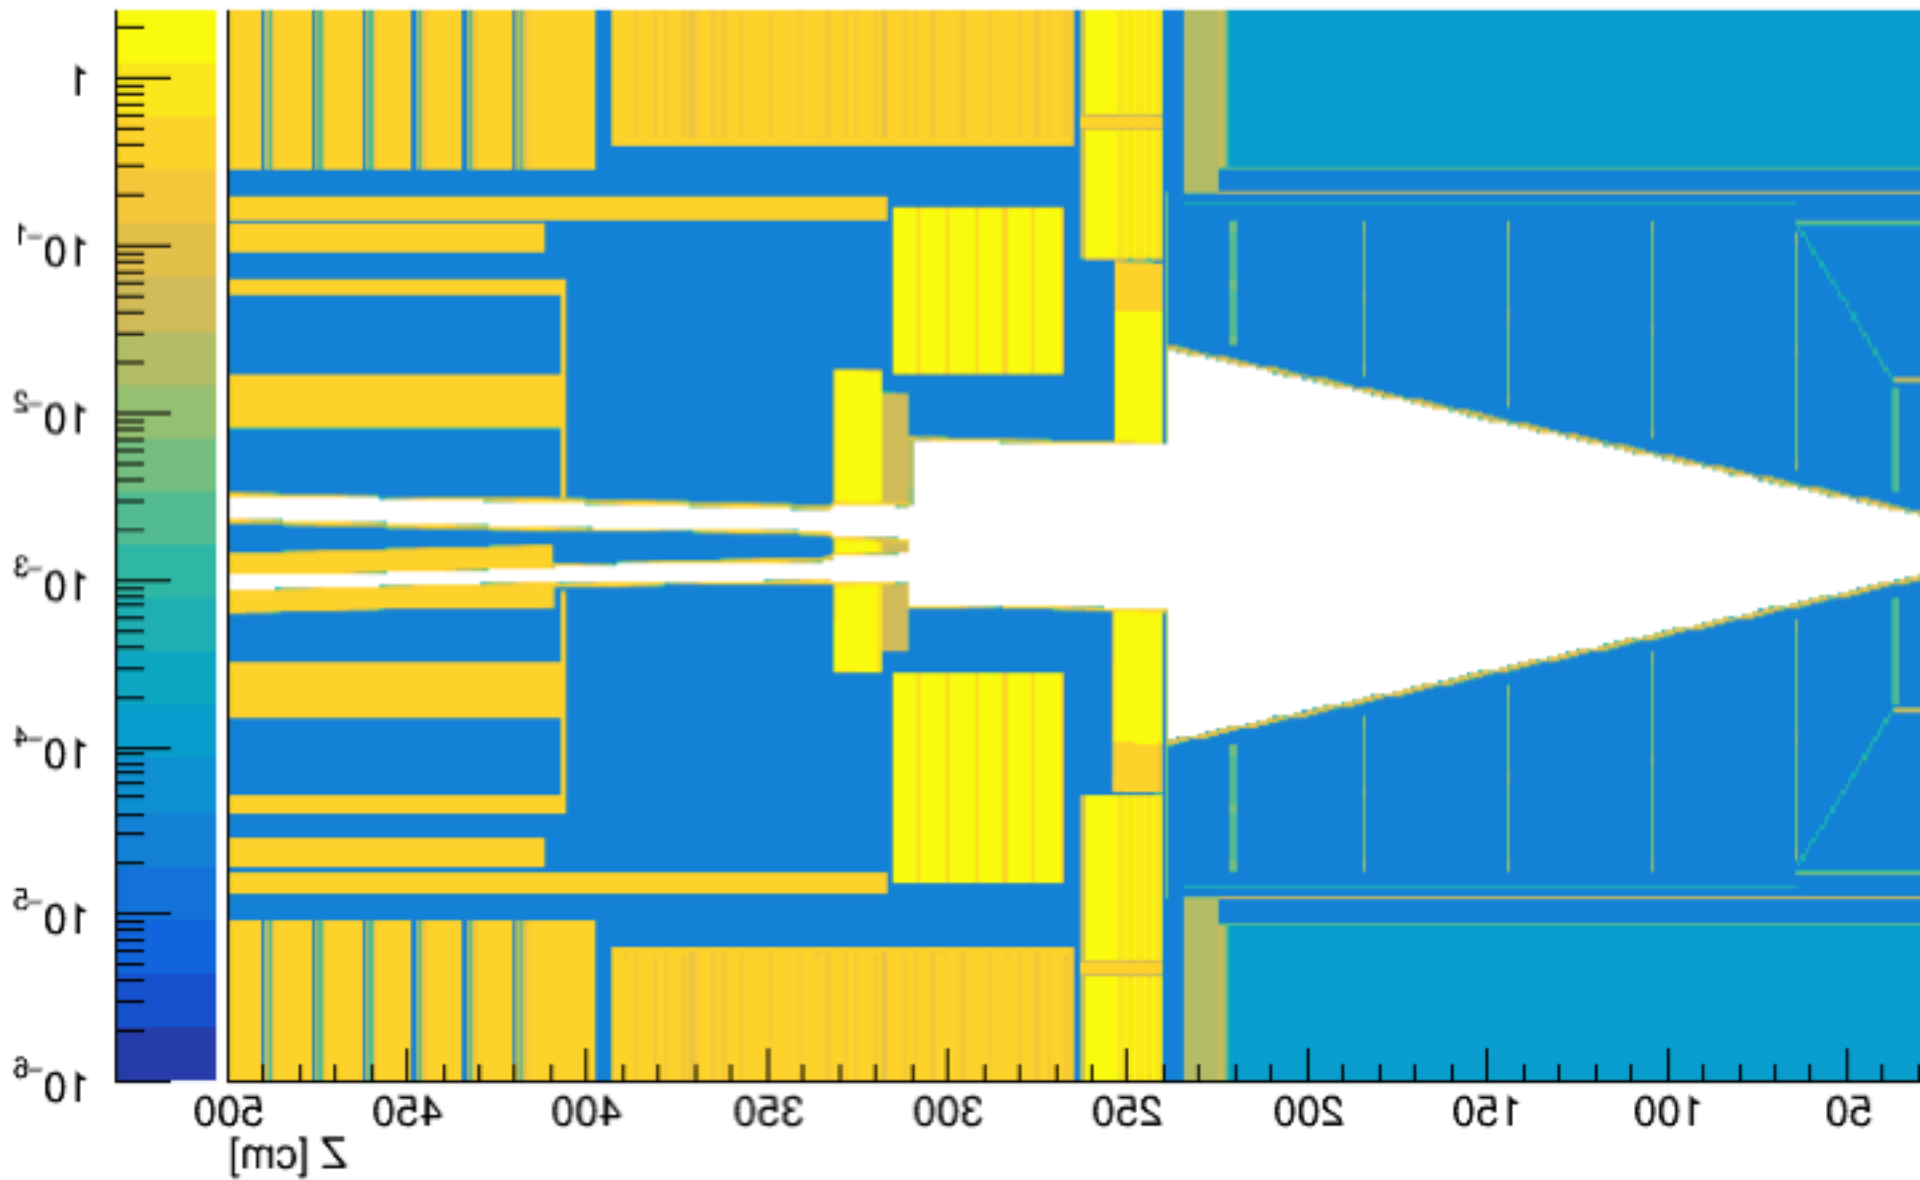

X0 y= 0.100 [cm]

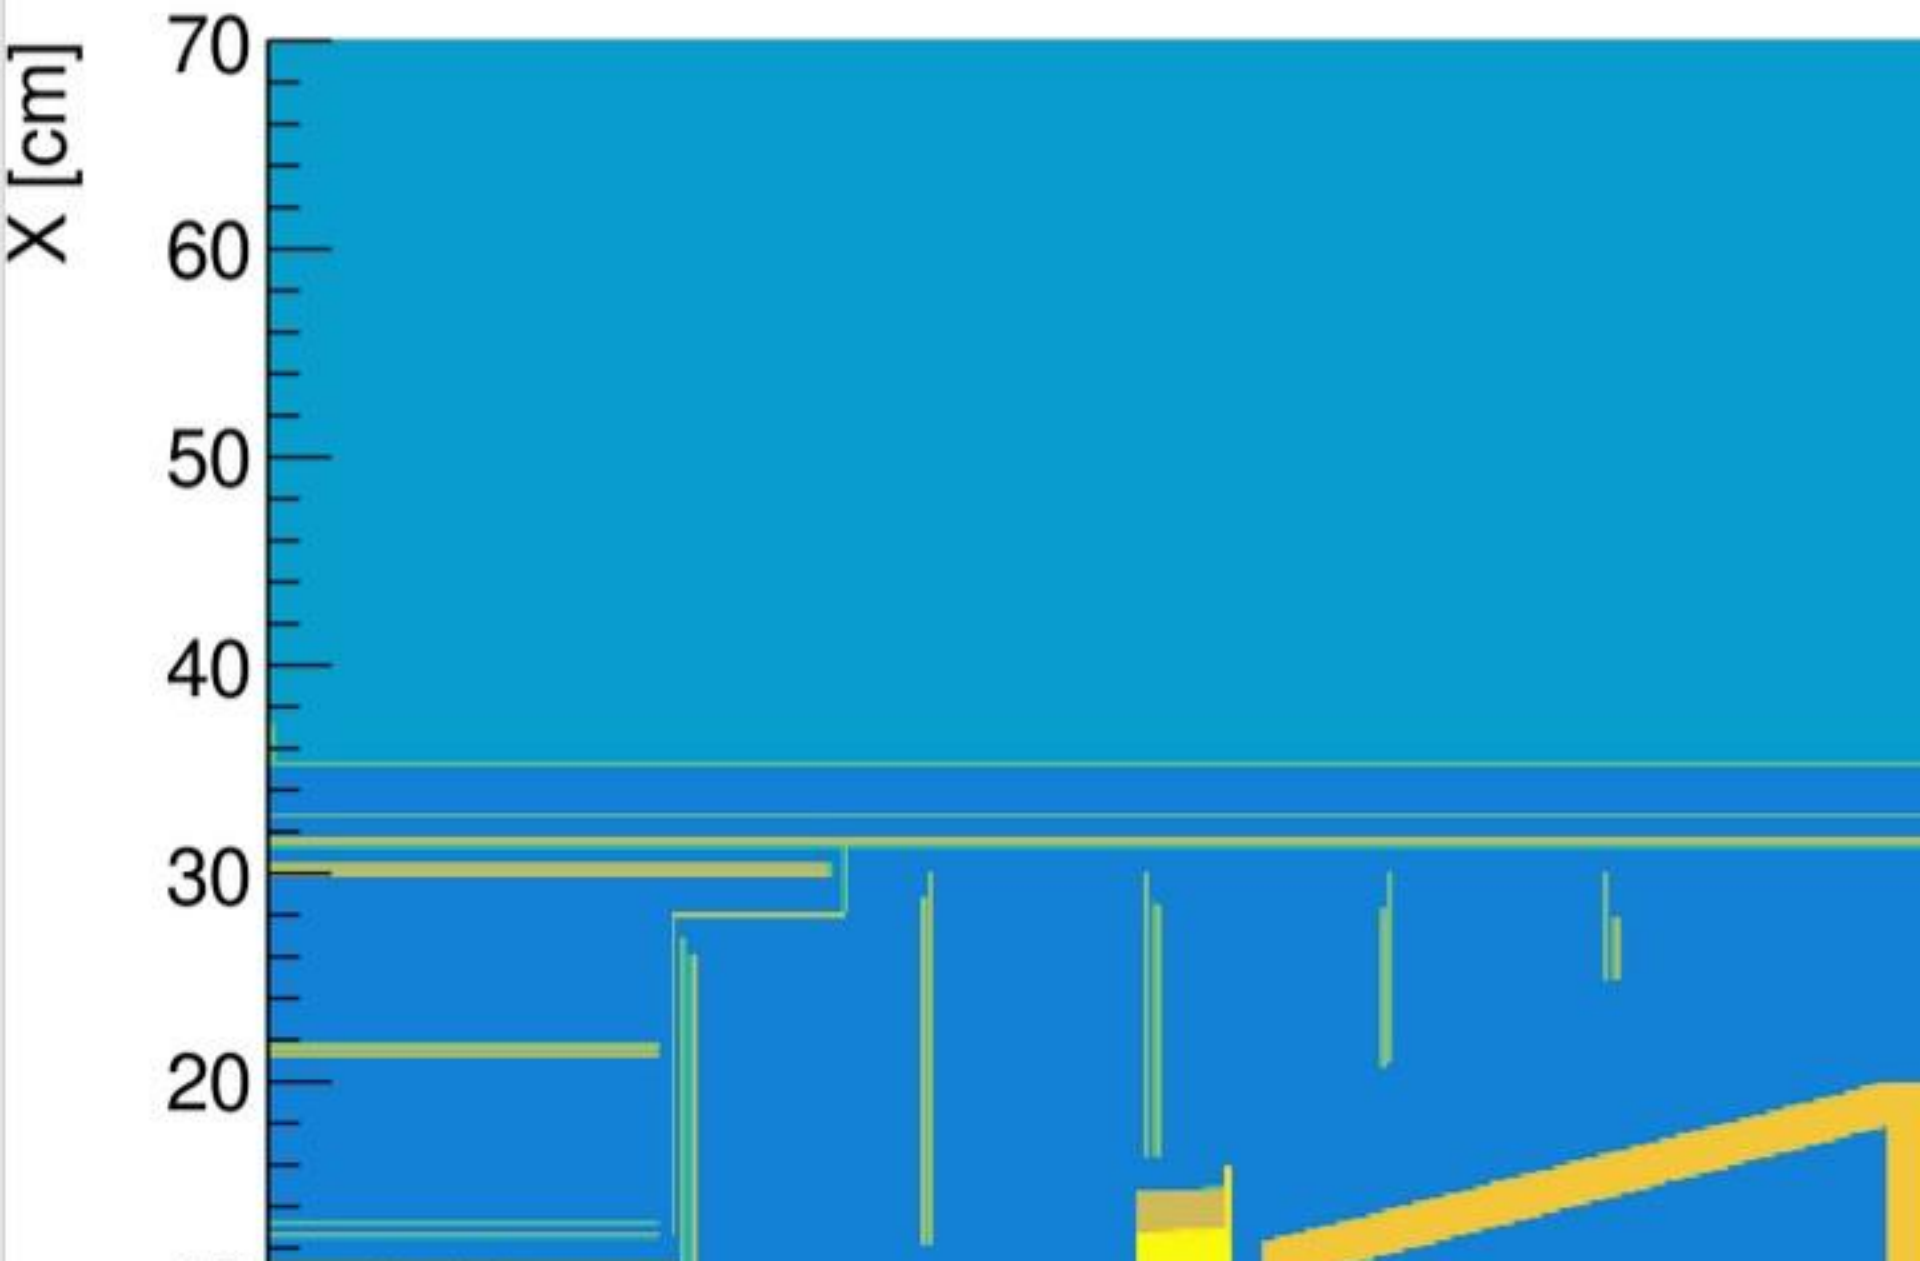

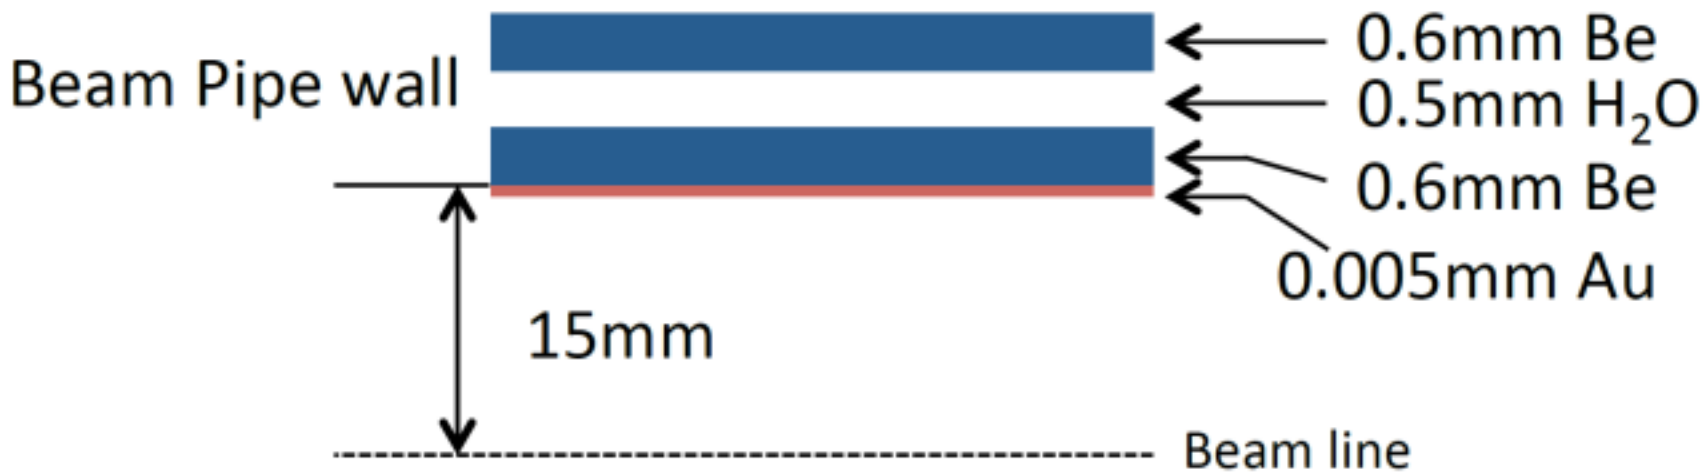

- Backscattered background is different due to difference in  $L^*$
- Time resolution** ( $< 10$  ns) could reject much of the background but the price should be paid in terms of power consumption


### Power:


**The duty cycle of FCCee results in continuous data taking**

- Power depends on # channels, data flux and time information
- Air cooling is ok up to  $20\text{mW}/\text{cm}^2$  but more complex structure renders such solution more difficult.
- For power consumption  $> 20\text{ mW}/\text{cm}^2$  active cooling may be needed resulting in more material budget and less precision

**A compromise should be found**

# CMOS pixel resolution vs pitch

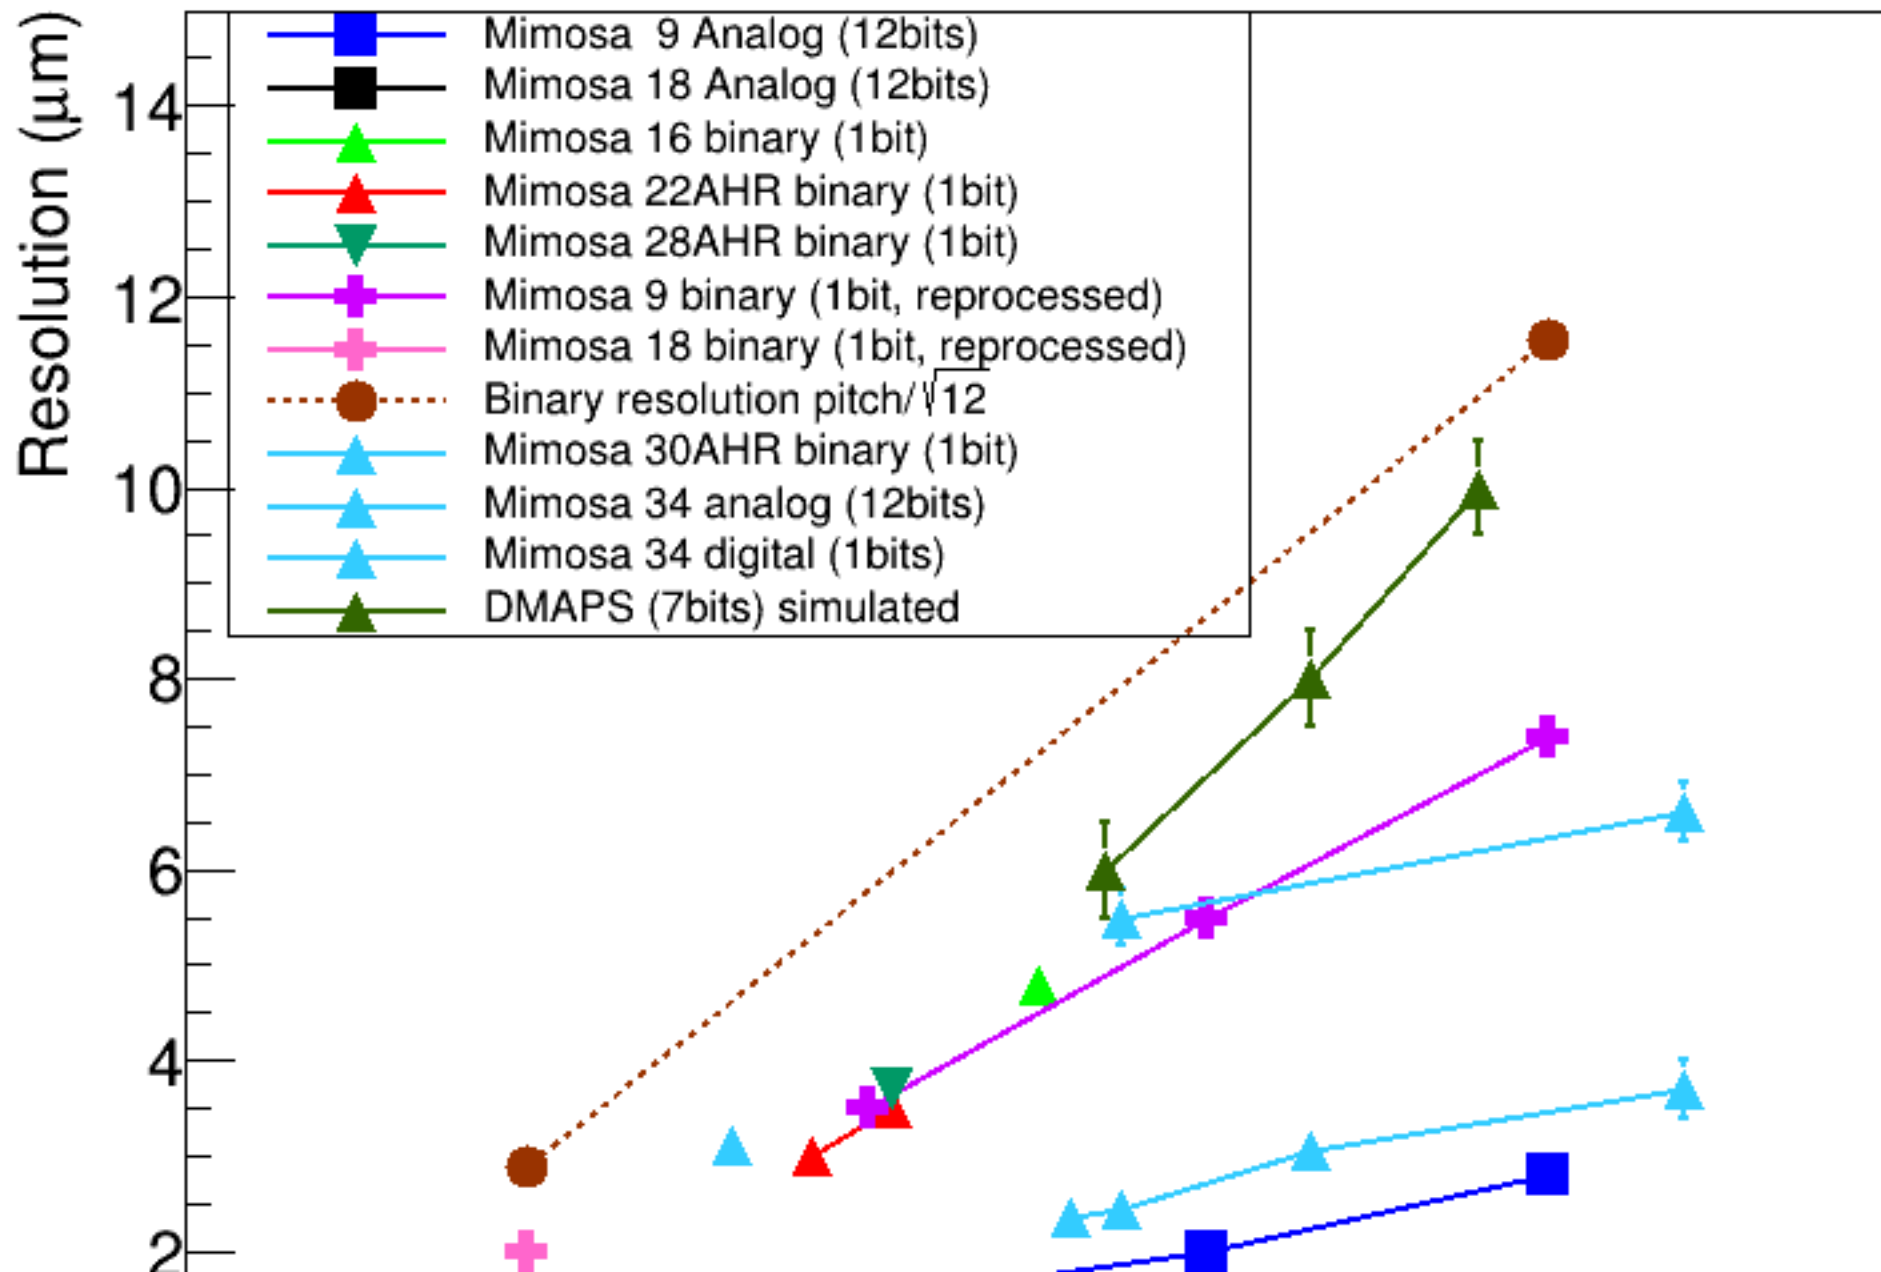

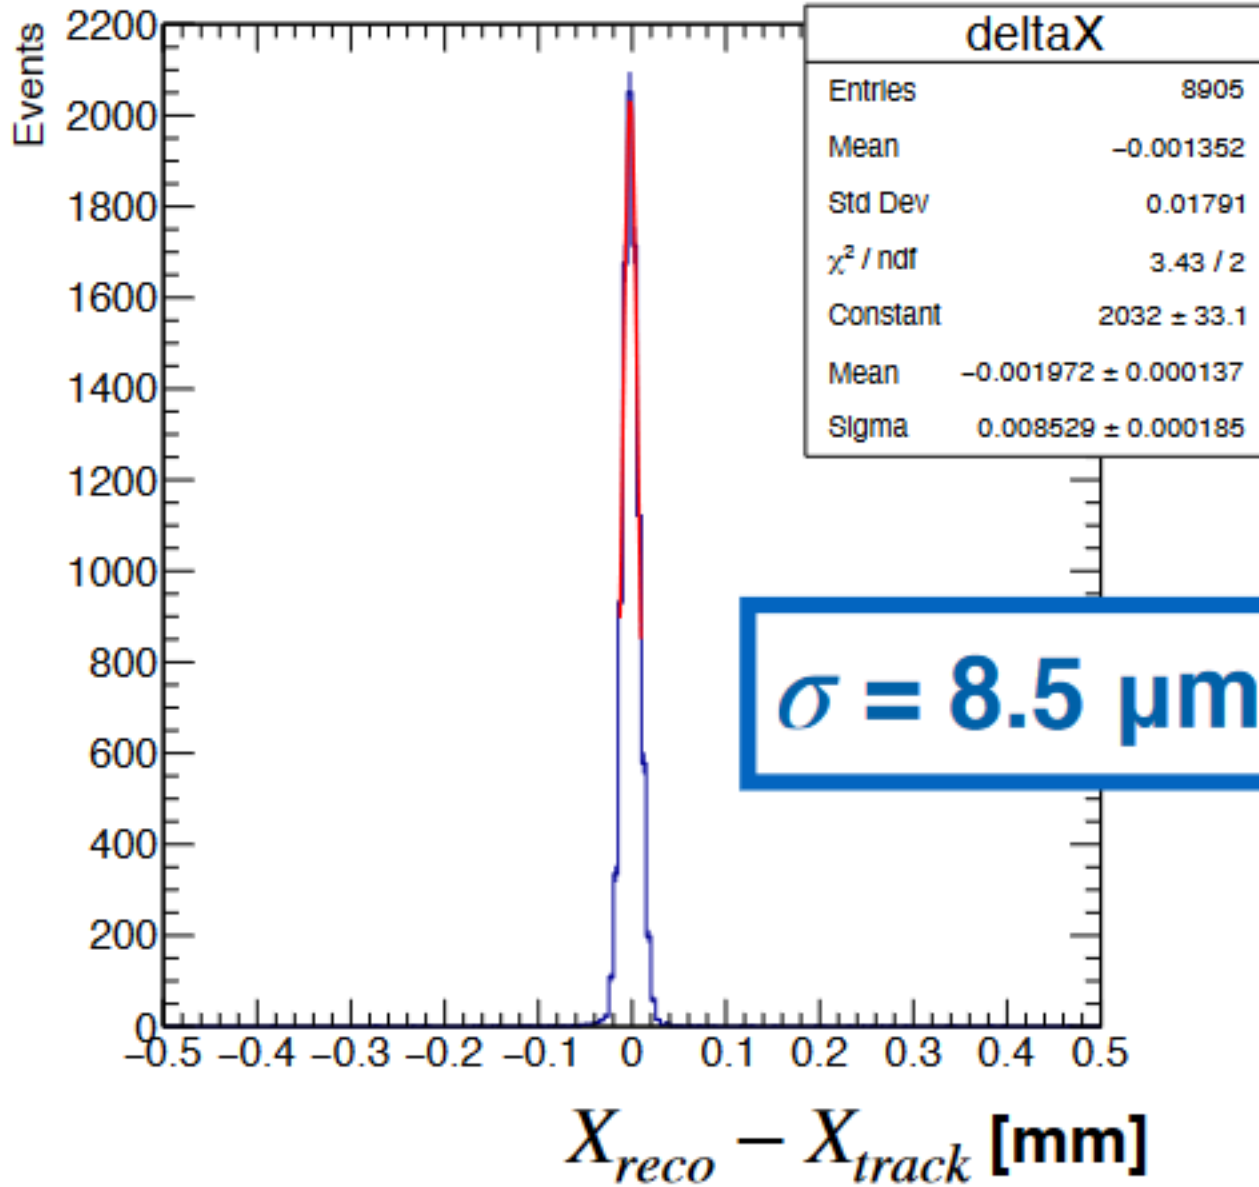


$\sigma = 8.5 \mu\text{m}$

also being


ling system and thus high

-LGAD  
Mandurrino et

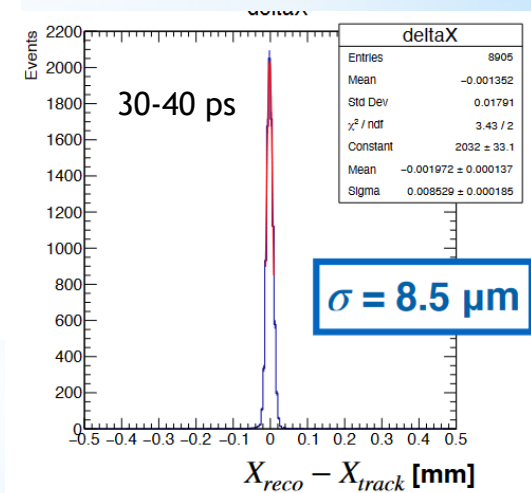

30-40 ps

$\sigma = 8.5 \mu\text{m}$



LGAD (Low-Gain Avalanche Diode)



AC-LGAD (AC-coupled LGAD)



# TPC

TPC is an important sub-detector of ILD:

- 200 hits → remarkable P measurement
- $dE/dX$  → PID
- Low material budget


TPC is impacted by two sorts of ions

- Primary ions
- Flow Back ions

The ions produced in the TPC gas amplification drift through the gas volume for  $\sim 0.44$  s




In case of ILC this results in **3 localized disks of ions** drifting through the TPC each made from a ions produced by a train of **1.3k BC**. This has almost no consequence on the momentum resolution

In the case of FCCee-pole ( $\sim 33$  MHz) it is **14 M BC** producing a cloud of ions that introduces a big distortion of the electric field of the TPC

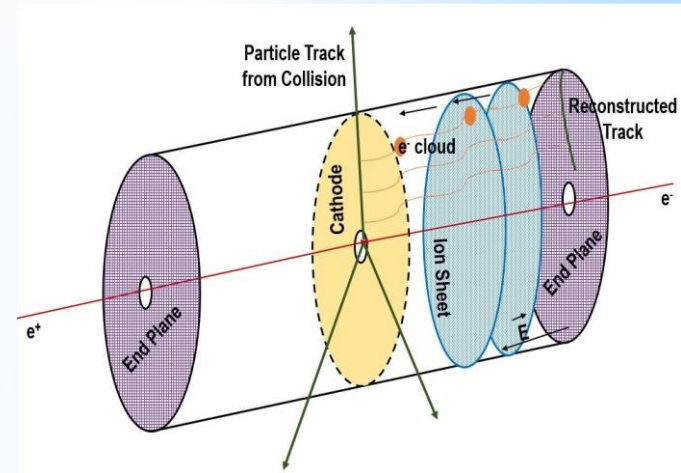

# TPC

By placing ILD TPC within FCCee MDI structure and a 2T magnetic field the impact of ions produced by the tracks of the 22 kHz hadronic Z decays that take place during the TPC clearing time (0.44 s) was studied and their impact on the field distortion is found to be quite important (up to 1 mm).

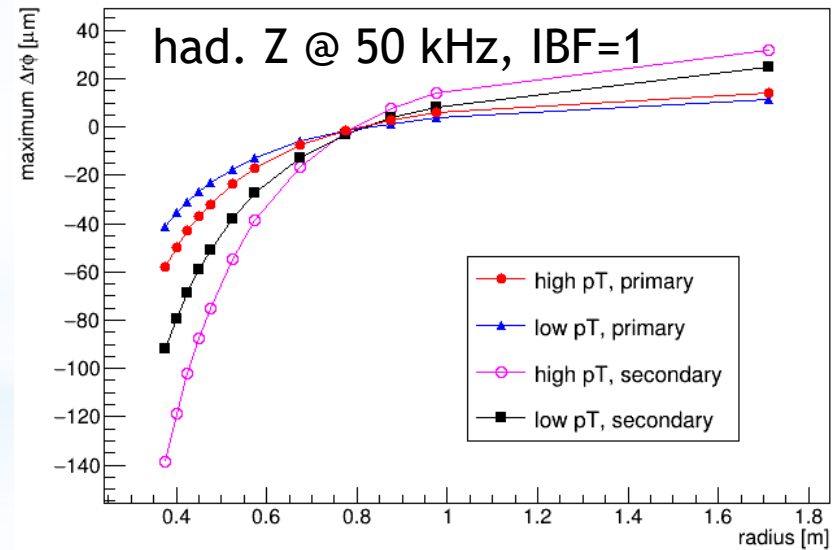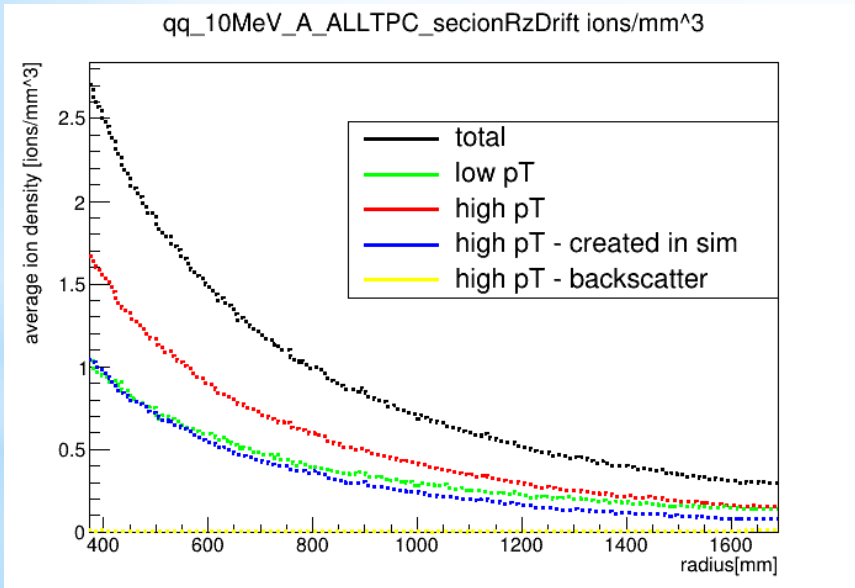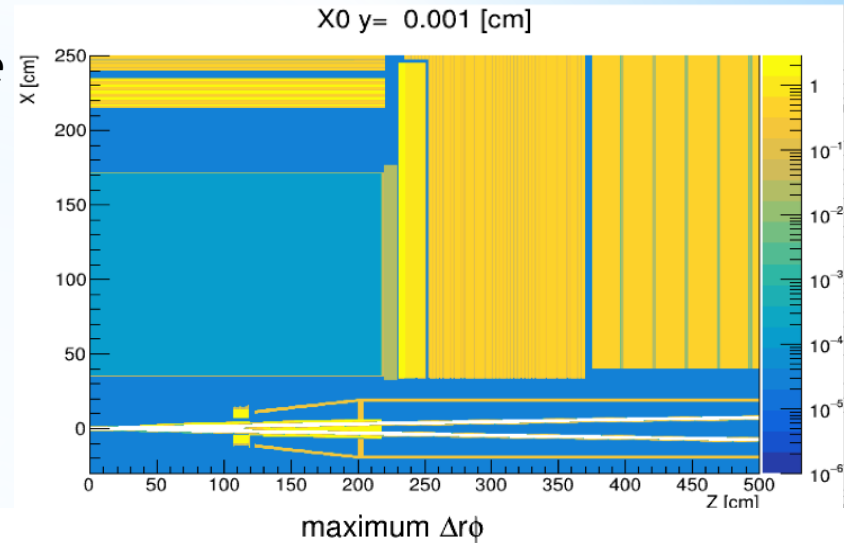

~1.3 M primary ions / event

maximum distortion~ (100 + 230\*IBF)  $\mu\text{m}$   
IBF=1-5





# TPC

Reducing IBF is rather mandatory to be able to reduce the distortion and then to correct for.

Several methods are proposed to reduce the IBF:  
-Active gating proposed for ILC seems not possible in CC but passive gating (E field configurations) could help.


-Using a combination of different MPGD (MM+GEM) can reduce the IBF.

-Most promising solution is to use Graphene to stop IBF since graphene allows the passing of electrons with but not ion.

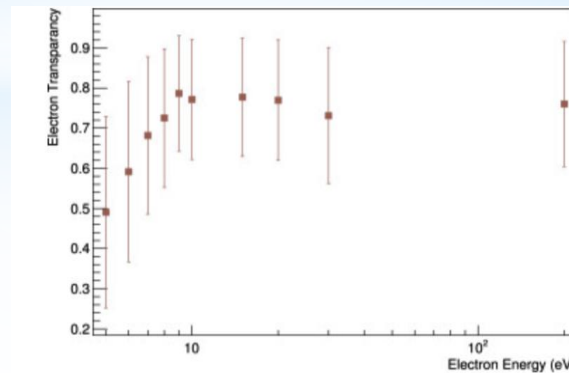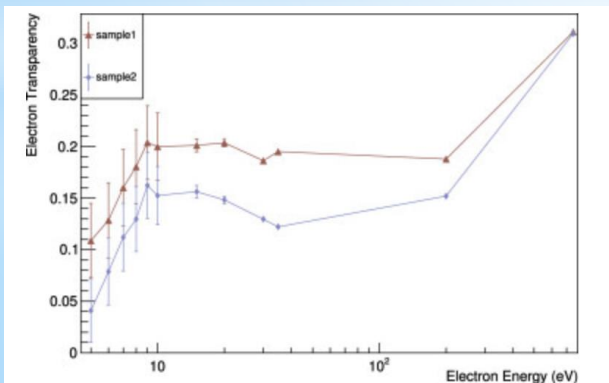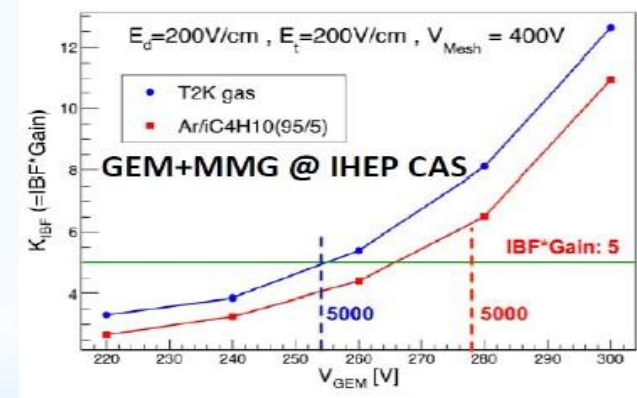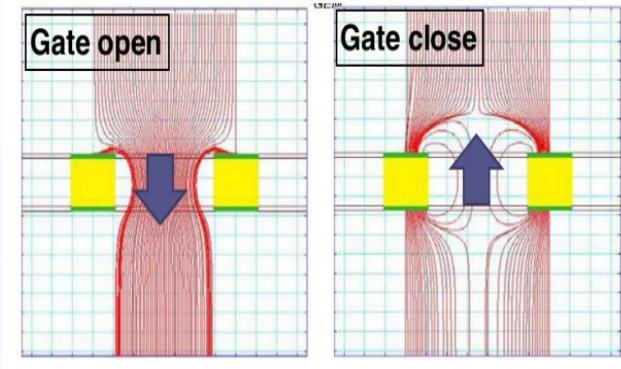



*J. Kang et al*  
*NIMA 1031 (2022) 166521*

# Graphene deposition on GEM foil is being developed by CERN group using a wet transfer procedure

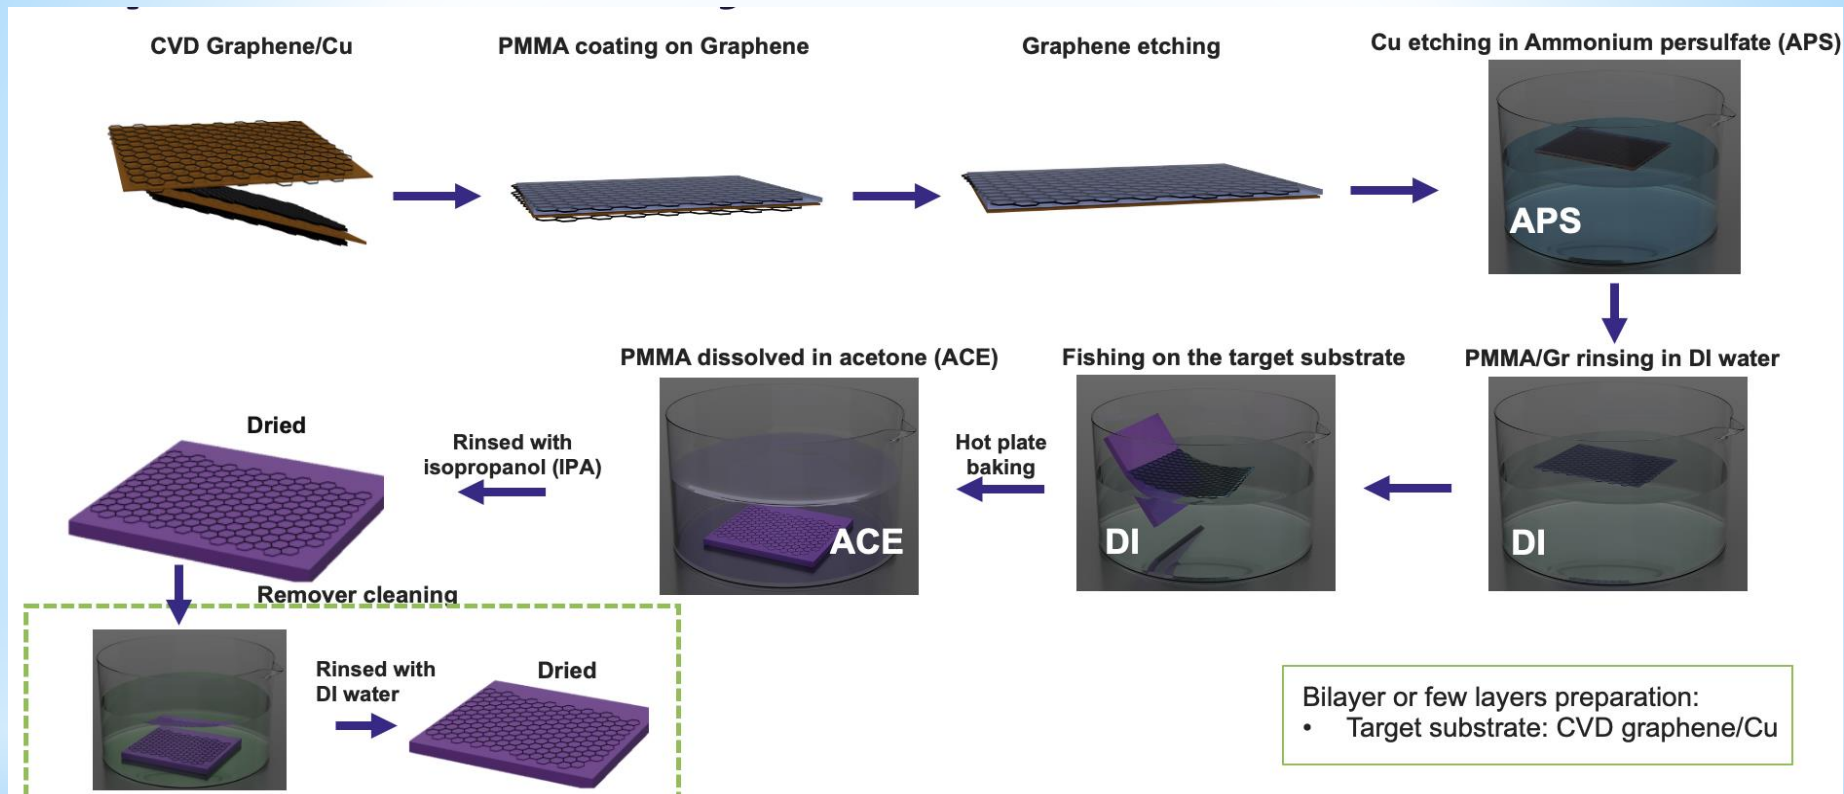

Coverage estimation with bilayer: ~90% after the first cleaning in ACE

Coverage estimation: ~30% after the second cleaning w/ Remover

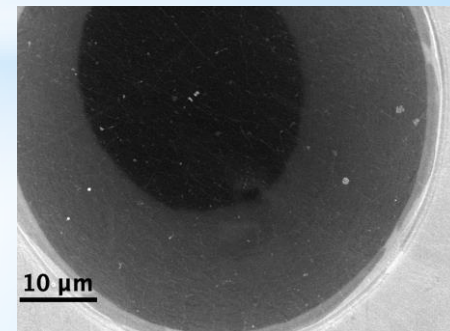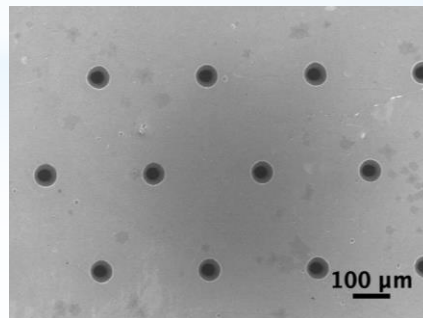






# Calorimeters

The most important issue to face when proposing PFA calorimeters for future CC is the power consumption in the absence of LC power-pulsing scheme. This represents 100 more power consumption that needs to be addressed. Several solutions are under scrutiny:

## -Active cooling:

Similar in spirit to the one proposed for HGCAL for SiW ECAL


By adding a Cu plate containing hollow tubes in which 2-phase CO<sub>2</sub> circulates

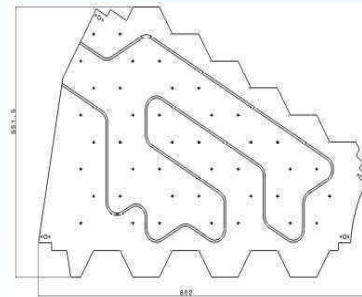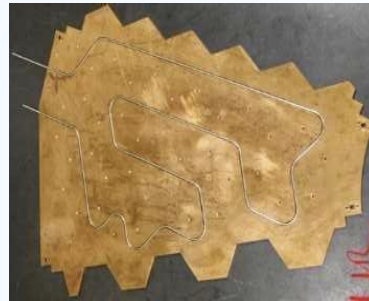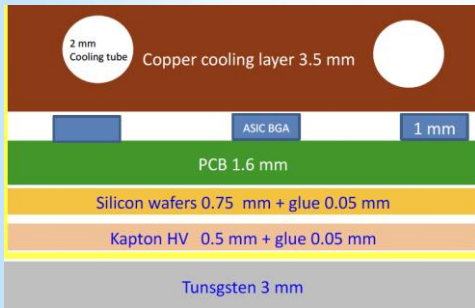

Or by adding a thin copper plate in thermal contact with the electronics and a water cooling circuit that could be cast in the absorber layer

## SDHCAL

### water circulation in copper pipes

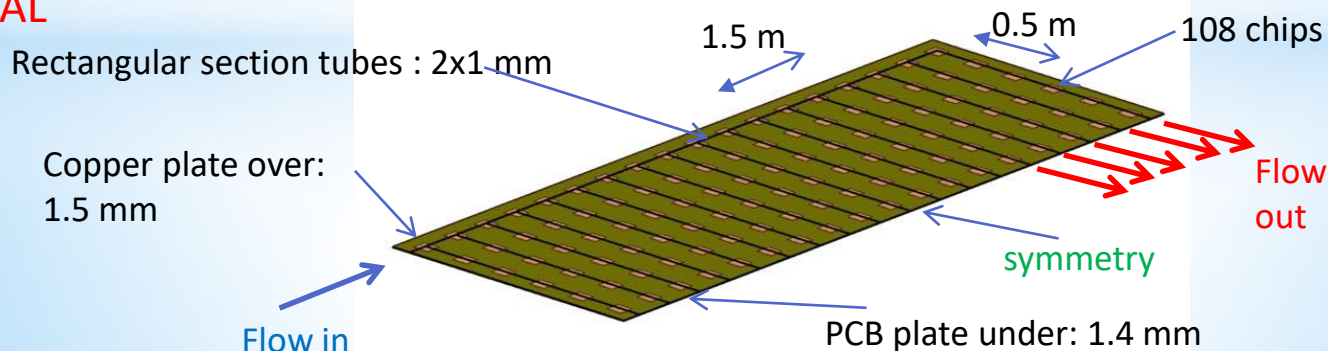



## Calorimeters

The most important issue to face when proposing PFA calorimeters for future CC is the power consumption in the absence of LC power-pulsing scheme. This represents 100 more power consumption that needs to be addressed. Several solutions are under scrutiny:

**-Electronics with less power consumption and/or less granularity:**

### First option

-Use finer technologies → less power consumption (**factor of 2 or more**)

350 nm → 130nm → 65 nm →

-Work out the ASIC design and optimize the power consumption of each component

### Second option

Reduce the granularity

Going from pads of 5 mm x 5 mm to 1 cm x 1 cm reduced the ASIC related power consumption by a **factor of 4**.

here the consequence on performances needs to be carefully studied


**Probably combining both and compare with realistic performance obtained with active cooling to decide for the future**

# Calorimeters

The most important issue to face when proposing PFA calorimeters for future CC is the power consumption in the absence of LC power-pulsing scheme. This represents 100 more power consumption that needs to be addressed. Several solutions are under scrutiny:




## -New ideas:

Reduction of number of channels by interconnecting pads/pixels as far as the occupancy/ambiguity is under control

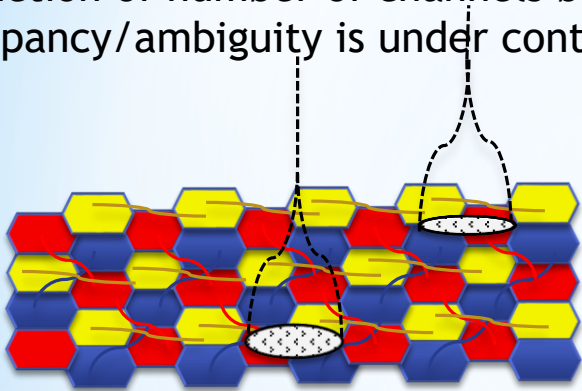

$N \times N \rightarrow 3N$  reduction

For large area detectors like calorimeters this may as efficient as PP reduction

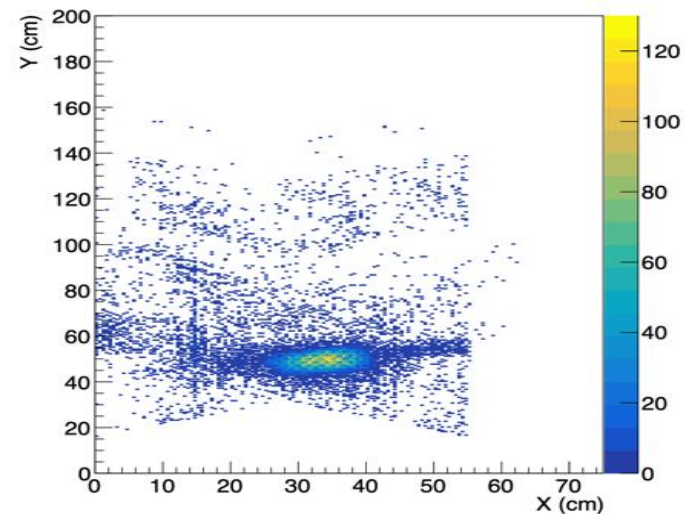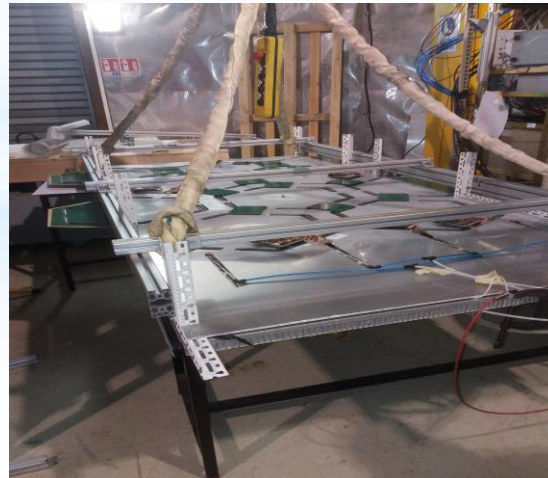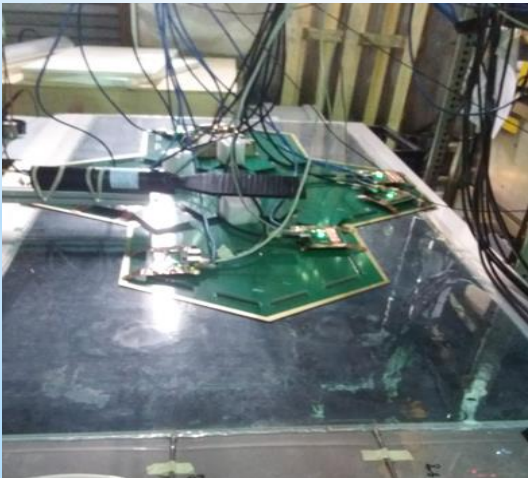

## Calorimeters

High rate capability of some technologies is questioned in particular at FCCee@Zpole

-

For instance GRPC-based SDHCAL in its present status could not be efficiently used

Hopefully, development of new low resistive materials such as the low-resistivity glass (Tsinghua) and low-resistivity thermoplastic (Lyon) will allow to increase the rate capability from  $O(10^2)$  Hz/cm to a  $O(10^4)$  Hz/cm

Results from Tsinghua

## Timing@ILD

Adding time information to ILD detectors will provide them with additional tools to reject background and also to improve on PID and jet reconstruction

A few points that need to be considered before to switch for T-detectors:

- Time information comes however with a price, namely increasing power consumption that we are trying to reduce
- Trackers equipped with time information could not compete with detectors like TPC as PID detectors unless they reach a few ps of time resolution which is not yet affordable

Calorimeters with time information could be very useful for PID and PFA but this should be in balance with the degradation of energy resolution due to active cooling

# Conclusion

- ILD collaboration intends to play a major role in any future  $e^+ e^-$  colliders
- ILD@ILC has reached the required maturity even though improvements could always be brought in
- ILD@CC studies has started
  - ❑ Adaptation of ILD detector within the constraints of CC
  - ❑ Adequacy of some sub-detectors with CC conditions and solutions
  - ❑ Physics performance study (not shown in this talk)
- ILD collaboration is eager to build bridges with other collaborations to face the challenges the CC environment pose