

1 MPGDs for TPCs at future lepton colliders

2 A. BELLERIVE

3 *Department of Physics, Carleton University, Ottawa, ON, K1S 5B6, Canada*

4 ABSTRACT

5 This submission will focus on advancements and advantages of Micro Pattern
6 Gas Detector (MPGD) technologies together with their applications for the con-
7 struction of a dedicated Time Projection Chambers (TPC) that can serve as an
8 excellent main tracker for any multipurpose detector that can be foreseen to
9 operate at a future leptons collider. The first portion of the report will be the
10 1.5 page executive summary. It will be followed by sections detailing on appli-
11 cations of MPGDs specifically for the construction of the LCTPC for the ILD
12 at ILC, for a possible upgrade of the Belle II detector and for the design of a
13 TPC for a detector at CEPC. MPGD technologies offers synergy with other de-
14 tector R&D's and several application domains; a few examples will be provided
15 in the context of the long range planning exercise in the USA. Link to industrial
16 partnership and work with institutions in the USA will be highlighted when
17 appropriate.

18
19

20 Submitted to the Proceedings of the US Community Study
21 on the Future of Particle Physics (Snowmass 2021)
22

23

24 Advances in our knowledge of the structure of matter during the past century have
25 been made possible largely through the development of successive generations of high en-
26 ergy particle accelerators, as well as a continued improvement in detector technologies. The
27 physics goals of future high-luminosity lepton colliders set for the next generation of particle
28 accelerators at the energy-frontier for the deployment of a Higgs factory, and also at the
29 flavour-precision frontier, have put stringent constraints on the need to develop novel instru-
30 mentation. Time Projection Chambers (TPC) operating at e^+e^- machines in the 1990's
31 reached their sensitivity limit and new approaches needed to be developed to overcome the
32 need for improved resolution. The spatial and timing resolution goals needed nowadays rep-
33 resents an order of magnitude improvement over the conventional proportional wire/cathode
34 pad TPC performance, which is limited by the intrinsic $\mathbf{E} \times \mathbf{B}$ effect near the wires, and
35 approaches the fundamental limit imposed by diffusion. Other detrimental effects such as
36 material budget, cost per readout channel and power consumption also represent serious
37 challenges for future high-precision tracking detectors. One of the most promising area of
38 R&D in subatomic physics is the novel development of gas detectors. Micro Pattern Gas
39 Detector (MPGD) technologies have become a well-established advancement in the deploy-
40 ment of gaseous detectors because those will always remain the primary choice whenever
41 large-area coverage with low material budget is required for particle detection. MPGDs
42 have indeed a small material budget, which is important in a high background or a high-
43 multiplicity environment, and naturally reduce space charge build up in the drift volume
44 by suppressing positive ion feedback from the amplification region. Of greatest importance
45 however, is that the $\mathbf{E} \times \mathbf{B}$ effect is negligible for an MPGD because the micro holes have
46 $\sim 100 \mu\text{m}$ spacing, which offers a rotationally symmetric distribution and thus no preferred
47 track angle.

48 MPGD, in particular the Gas Electron Multiplier (GEM), the Micro-Mesh Gaseous
49 Structure (Micromegas), and other micro pattern detector schemes, offers the potential to
50 deploy new gaseous detectors with unprecedented spatial resolution, high rate capability,
51 large sensitive area, operational stability and radiation hardness. Many foreseen detectors
52 for future leptons colliders contemplates the usage of MPGD devices. This report mainly
53 focuses on future proposed MPGD-based TPCs at leptons colliders. Namely: (i) the In-
54 ternational Large Detector (ILD) at the International Linear Collider (ILC), (ii) the Belle
55 II detector upgrade at the SuperKEK B-Factory, and (iii) the TPC for a detector at the
56 Circular Electron Positron Collider (CEPC).

57 Overall, MPGD-based TPC is offering excellent tracking ability, while enabling continu-
58 ous or power-cycled readouts. Historically, TPCs were the main central tracking chambers
59 of ALEPH and DELPHI at the electron-positron collider LEP, where many Americans
60 were active collaborators. The T2K Near Detector with Micromegas represents another
61 area where TPC technology was deployed with engagement with participants from North
62 America. The refurbishing of the ALICE TPC is a more recent example of the usage of
63 MPGD with participation from institutions from the United States (Oak Ridge National
64 Laboratory, The University of Texas at Austin, University of Houston, University of Ten-
65 nessee, Wayne State University, Yale University). The ALICE main central-barrel tracking
66 used to rely on multi-wire proportional chambers, which have since been replaced by GEM
67 designed in an optimized multilayer configuration, which stand up to the technological chal-

68 lenges imposed by continuous TPC operation at high rate. The requirement to keep the
69 ion-induced space-charge distortions at a tolerable level leads to an upper limit of 2% for the
70 fractional ion backflow has been achieved. The upgraded TPC readout will allow ALICE
71 to record the information of all tracks produced in lead-lead collisions at rates of 50 kHz,
72 while producing data at a staggering rate of 3.5 TB/s. For both T2K and ALICE, TPCs
73 partnership with CERN allows the fabrication of anodes boards os size of order of 50 cm
74 x50 cm.

75 The TPC concept is viewed in particle physics like the ultimate drift chamber since it
76 provides 3D precision tracking with low material budget and enables particle identification
77 through dE/dx measurements or cluster counting techniques. At ILC and CEPC, as well
78 as Belle II upgrades, MPGD TPC technologies and viewed to be the topmost main track-
79 ing system for some conceptual detectors. There are synergy with other MPGD detector
80 activities (as summarized here) that offers clear motivation for gaseous tracking at leptons
81 colliders. Gaseous tracking devices have been extremely successful in providing precision
82 pattern recognition. They provide hundreds of measurements on a single track, with an
83 extremely low material budget in the central region of the detector. This results in accurate
84 track reconstruction and hence high tracking efficiency. The continuous measurements of
85 charged particle tracks also allows for precise particle identification capabilities, which has
86 the possibility not only to achieve excellent continuous tracking, but also to improve jet en-
87 ergy resolution and flavour-tagging capability for an experiment at a future lepton collider.
88 These are two essential advantages for experiments at a lepton collider. The main challenges
89 for the design of a large TPC are related to the relative high magnetic field , in which some
90 foreseen detectors are planned to operate. For accurate measurements of the momenta of
91 charged particles, the electromagnetic field has to be known with high precision. Final and
92 sufficient calibration of the field map can be achieved using corrections derived from the
93 events themselves, a procedure which has been demonstrated. While the event rate of an
94 lepton colliders detector can easily be accommodated by current TPC readout technology,
95 R&D to mitigate the effects of secondary processes from bunch-bunch interactions is ongo-
96 ing. MPGD technologies offer a wide-range of applications and calls for synergy in detector
97 R&D at future leptons colliders. The availability of highly integrated amplification system
98 with readout electronics allows for the design of gas-detector systems with channel densities
99 comparable to that of modern silicon detectors. This synergy with silicon detector ASIC
100 development is very appealing for MPGD TPCs since resent wafer post-processing enables
101 the integration of gas-amplification structures directly on top of a pixelized readout chip.

102 The ILD TPC is in fact based on mature hardware and software contributions from mul-
103 tiple partners and in particular from the United States (*e.g.* Cornell University and Wilson
104 Laboratory - now the Cornell Laboratory for Accelerator-Based Sciences and Education).
105 The LCTPC is conceptually ready as it meets design specifications and is engineeringly
106 possible. It spans decades of research and innovation in MPGDs. Single-hit transverse
107 resolution results from testbeam at 1 T magnetic field extrapolated at the 3.5 T filed of
108 ILD clearly demonstrate that single point resolution of 100 μm over about 200 points is
109 achievable with several MPGD technologies (GEM, MM or GridPix). This translates from
110 simulation to two-hit separation of $\sim 2\text{mm}$ and a momentum resolution $\delta(1/p_T) \simeq 10^{-4}/$
111 GeV/c (at 3.5 T), which are the required performance of the TPC as a standalone tracker at

112 ILD for ILC. Other areas of MPGD developments are ongoing on ion gating, dE/dx, power-
113 pulsed electronics and cooling. Similar simulations were performed by members of the Belle
114 II Collaboration showing that a GridPix-based TPC could be the ultimate central tracking
115 for an upgrade detector at a future Hyper B-Factory. The readout choice will need to be
116 adapted to the high-luminosity beam structure of HyperKEK-B and probably a buffer that
117 can handle discrete readout of multiple concurrent events will be required. The baseline de-
118 sign of CEPC detector is an ILD-like concept, with a superconducting solenoid of 3.0 Tesla
119 surrounding the inner silicon detector, TPC tracker detector and the calorimetry system.
120 The CEPC TPC detector will operate in continuous mode on the circular machine. As for
121 the ILD TPC, MPGD technologies is applicable and desirable for a detector at CEPC.

122 Reference [1].

123 1 LCTPC for ILD at ILC

124 The International Large Detector (ILD) is one of two proposed all-purpose detectors for the
125 future International Linear Collider (ILC). To meet the stringent resolution requirements
126 for a detailed exploration of the physics at the TeV scale, the ILD proposes a gaseous
127 detector as the central tracking. Considerable R&D on novel gas detectors for the ILC has
128 been carried out during the last two decades. The ILC is the most advanced concept-ready
129 accelerator to be deployed as a Higgs Factory. The detector technology associated with
130 ILC are quite mature. The ILD is one detector concept at the ILC where calorimetry
131 and tracking systems are combined. The tracking system consists of a silicon inner vertex
132 detector, forward tracking disks and a large volume Time Projection Chamber (TPC). A
133 TPC using gaseous MPGD technology is being planned for ILD. The ILD TPC will fill
134 a large volume about 4.7 m in length, spanning radii from 33 cm to 143 cm (at 4 T) or
135 180 cm (at 3.5 T). In this volume the TPC provides up to 220 three dimensional points
136 for continuous tracking. This high number of points allows for a reconstruction of the
137 charged particle component of the event with high accuracy, including the reconstruction of
138 secondaries, long lived particles, and potentially kinks. The ILD TPC requires transverse
139 ($r - \phi$) and longitudinal (Z) single-hit space-point resolutions of less than 100 μm and
140 1400 μm , respectively, for all tracks over the full 2.35 m drift region. The readout electronics
141 for the TPC has to be adapted to the design of the tracking chamber and the beam structure
142 of the collider. The physics goals of the drives track reconstruction resolution and MPGD
143 pad sizes as ILC detectors requires momentum resolution $\delta(1/p_T) \simeq 10^{-4}/\text{GeV}/c$ (at 3.5
144 T), dE/dx resolution of about 5% or better, and two-track separation of ~ 2 mm and ~ 6
145 mm in the $r - \phi$ and Z plane, respectively. A tracking efficiency of greater than 99%, for
146 track momenta above 100 MeV within the angular acceptance was proven to be achievable
147 with events simulated realistically with full backgrounds. At the same time the complete
148 TPC system will introduce only about 10% of a radiation length into the ILD allowing
149 particle flow algorithm technique for global event reconstruction.

150 Within the framework of the LCTPC Collaboration, a large prototype TPC has been
151 built as a demonstrator. Its endplate can accommodate up to seven modules of MPGD

152 representative of the near-final proposed design of the TPC endplate for ILD for the recon-
153 struction hits over a track-length of about 100cm. LCTPC is a collaboration of physicists,
154 engineers, technicians, students and support staff from 25 institutes from 12 countries with
155 23 other institutes as observers. The LCTPC observer institutes for the USA are: Iowa State
156 University, MIT, Purdue University, Yale University, Cornell University, Indiana University,
157 Stony Brook, Louisiana Tech, LBNL and BNL. The MPGD technologies being developed
158 for the LCTPC are Gas Electron Multiplier (GEM), Micromegas (MM) and GridPix. All
159 technologies have been studied with an electron beam in a 1 Tesla magnet at DESY. Suc-
160 cessful test beam campaigns with multiple modules of MPGD readouts have been carried
161 out in the last few years. Major advancements has indeed been accomplished by the LCTPC
162 Collaboration to establish MPGD's as a solid baseline for a TPC at ILC. Results demon-
163 strate that the required hit reconstruction efficiency, field inhomogeneity, spatial resolution
164 and stand alone momentum resolution are achievable.

165 TPC has been successfully deploy at LEP in the 1990's. The advantages of a TPC
166 at lepton colliders are its ability to reconstruct track from charged particle in 3 dimen-
167 sions, while introducing very small amounts of dead material. It allowed for powerful way
168 to perform continuous pattern recognition with precise energy lost measurement for parti-
169 cle reconstruction and identification, respectively. A limitation of conventional wire-based
170 TPC's that operated at LEP was the appearance of some field distortions due to $\mathbf{E} \times \mathbf{B}$ near
171 the wires and field inhomogeneity created by ion backflow. It is clear that the advantages
172 of the MPGDs were promptly acknowledge with the ion backflow being very limited by a
173 suitable choice of the field configuration, as well as the $\mathbf{E} \times \mathbf{B}$ effects being nearly illuminated
174 with the microscopic structure of a MPGD. However, it was also recognized that, to profit
175 from the excellent resolution allowed by a limited diffusion and a very localized avalanche,
176 either sufficiently small pads would be needed, to share the charge among several pads, or
177 a mechanism for spreading the avalanche was needed. Without such a sharing, the only
178 information obtained would have been which pad received the charge, and the hit position
179 would have a flat probability over the pad width, limiting the resolution along a pad row to
180 be $w/\sqrt{12}$, w being the pitch-width over a pad row. Thus, multi-stage GEM were developed
181 to allow for natural spreading by diffusion in the multilayer gas amplification itself, where
182 about $\sim 300 \mu\text{m}$ r.m.s., was sufficient to obtain enough charge spreading with ~ 1 mm wide
183 pads. For Micromegas, where the avalanche has typically a $\sim 15 \mu\text{m}$ r.m.s., an additional
184 charge-spreading mechanism was necessary. A resistive layer using a superposition of an in-
185 sulator and a resistive cover provides a continuous Resistor-Capacitance (RC) network over
186 the surface which spreads the charge around the avalanche. Such construction technique
187 is applicable to MM and GEM to allow pad widths of 2 mm or 3 mm. The pixel-based
188 TPC, where single primary ionization can be detected, is now a realistic option for ILD. To
189 make the most of the fine pitches of an MPGD, the GridPix readout structure is adapted
190 to the same feature size. Readout ASICs of silicon pixel detectors, such as the Timepix3
191 chip, is placed directly below the gas amplification stage. In this setup, the bump bond
192 pads normally used to connect the readout chip to the silicon-sensor are used as the charge
193 collection anodes. Such principal can be applied to triple-GEM or MM. The latter MM in-
194 carnation is refer to as GridPix and is produced by using a post-processing technique, which
195 guarantees a high quality grid perfectly aligned with the readout pixels. This alignment

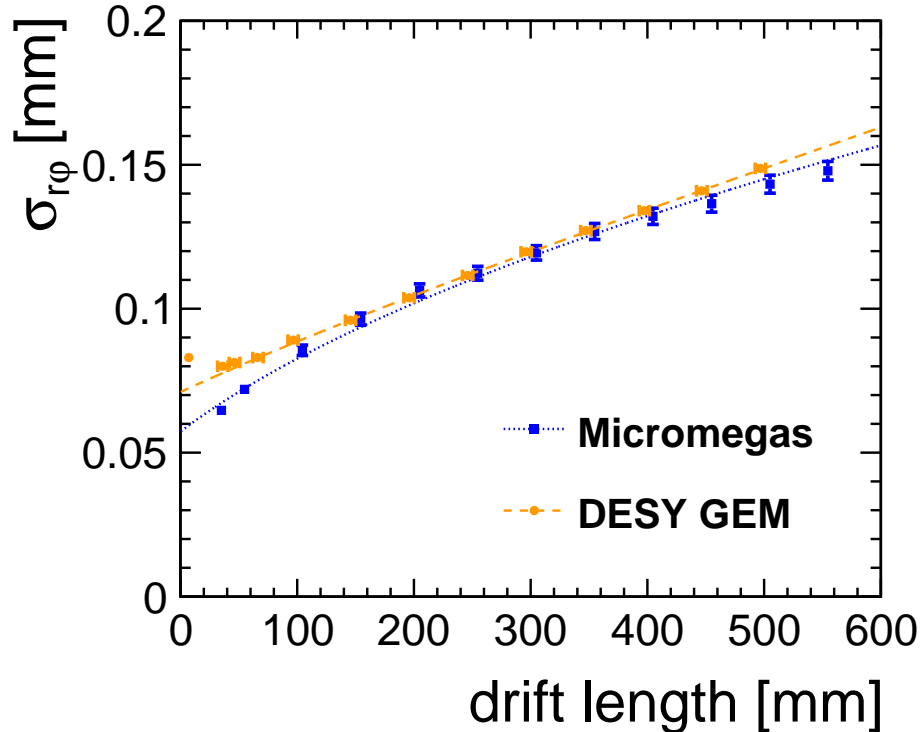


Figure 1: Single-hit space-point $r - \phi$ transverse resolution plotted against drift distance for both GEM and Resistive Micromegas at 1.0 Tesla.

196 ensures that the complete charge avalanche initiated by a primary electron within the MM
 197 gap is collected on one pixel. Because of the high signal-to-noise ratio tracking and dE/dx
 198 measurement with GridPix both benefit from distinguishing and detecting single primary
 199 electrons with a high efficiency.

200 The LCTPC Collaboration strives to create an infrastructure for developing and testing
 201 new and advanced detector technologies to be used at a future linear collider. The aim was to
 202 make possible experimentation and analysis of data for institutes, which otherwise could not
 203 be realized due to lack of resources. The LCTPC Collaboration welcomes participants from
 204 North-America. The shared-infrastructure comprised an analysis and software network; as
 205 well as instrumentation setups for tracking detectors and calorimetry. A rather complete
 206 setup has been established at the DESY test beam, providing an environment for a world-
 207 wide effort in the development of a large TPC to be used as main tracking device at the
 208 ILC. It consists of the following items: 1) large scale (about 1 m) and low mass field cage;
 209 2) modular end plate system for large surface GEM and Micromegas systems; 3) MPGD
 210 detector modules; 4) prototype readout electronics; 5) magnet, supporting devices, HV,
 211 gas and cooling systems, and slow controls; 6) silicon envelope detectors; and 7) software
 212 developed within the MarlinTPC framework for simulation, calibration and reconstruction
 213 of TPC data. The LCTPC Large Prototype (LP) has a diameter of 770 mm and a length

214 of 610 mm and fits into the 1 Tesla superconducting magnet PCMAG. Tracks measured
 215 within the LP can have up to 125 space points, using anode pad readout, depending on
 216 the number of modules and pad size. The aim of these tests is not only to confirm the
 217 anticipated single-point resolutions, but also to address issues related to the large size of
 218 this TPC, like alignment, calibration, pulsed-electronics, cooling, electric and magnetic field
 219 distortions, dE/dx , and ions backflow. Over the years analyses of data were performed from
 220 test beam measurements with the LCTPC LP equipped with: (i) wet-etched triple GEM
 221 and (ii) Micromegas with charge dispersion readout. Inhomogeneities of the electric field
 222 close to the MPGD borders caused distortions of the recorded tracks. These distortions
 223 were corrected in upgraded modules and the residual distortions are treated by common
 224 software package for both GEM and Micromegas pad-based readouts. After alignment
 225 calibration and correction have been applied, the hit residuals line up around zero for both
 226 technologies. In Figures 1, the measured transverse (xy -plane) space-point resolutions are
 227 plotted as a function of the drift distance for data collected in a 1 T magnetic field with
 228 GEM and Micromegas. In all cases, the transverse resolutions were measured using the
 229 geometric mean of inclusive and exclusive residual distributions from track fits and fitted to
 230 the analytical form $\sigma_T(z) = \sqrt{\sigma_T^2(z=0) + D_T^2 z}$, where D_T is the coefficient of transverse
 231 diffusion.

232 Based on these results at 1 T with the LP, an extrapolation to the parameters of the ILD
 233 TPC has been done using the attachment rate determined at the beam test. The results
 234 are shown in Figure 2. With a small attachment rate compatible with zero, the resolution
 235 requirement at the ILD experiment can be achieved. TPCs in running experiments as T2K
 236 or ALICE demonstrated that the necessary control of the gas conditions is possible. The
 237 expected single-point hit resolution in a magnetic field of 3.5 T confirms that pad-based
 238 GEM and Micromegas technologies meet the requirements of the proposed ILD-TPC for the
 239 future ILC, which is a single-hit resolutions of $\sigma_{r\phi}(z=0) \sim 60 \mu\text{m}$ and $\sigma_{r\phi} < 100 \mu\text{m}$ in the
 240 transverse plane for all tracks after 2.35 m of drift. Similar measurement and extrapolation
 241 on longitudinal Z , or time, single-hit resolution show that the ILD TPC requirements can
 242 be also achieve.

243 Figure 3 shows a fully equipped LP module with 96 GridPix detectors ($\sim 2 \text{ cm}^2$ cell) are
 244 being mounted in the LP. The readout structure consists of 160 GridPixes with a total of
 245 10.5 million pixels, each of a size of $55 \mu\text{m} \times 55 \mu\text{m}$. Preliminary results on the performance
 246 of GridPix readout shows great promise. Single electron diffusion measurements for GridPix
 247 points to similar, or better, performance as obtained with GEM or Resistive Micromegas.
 248 This indicates that the GridPix novel technology has great potential and is worth further
 249 investment in R&D.

250 One critical issue concerns potential field distortions due to ion accumulation within the
 251 drift volume of the chamber. At ILC, this can be mitigated by implementing an ion gating
 252 between bunch trains, using large aperture GEM foils. During bunch trains, the voltage
 253 difference between the GEM sides is configured to allow drift electrons cross the GEM and
 254 reach the amplification region. Outside bunch trains, the voltage difference is reversed so
 255 that ions produced in the gas amplification region stay confined and are guided to the GEM
 256 surface where they are absorbed. This GEM ion gating system has been assembled and

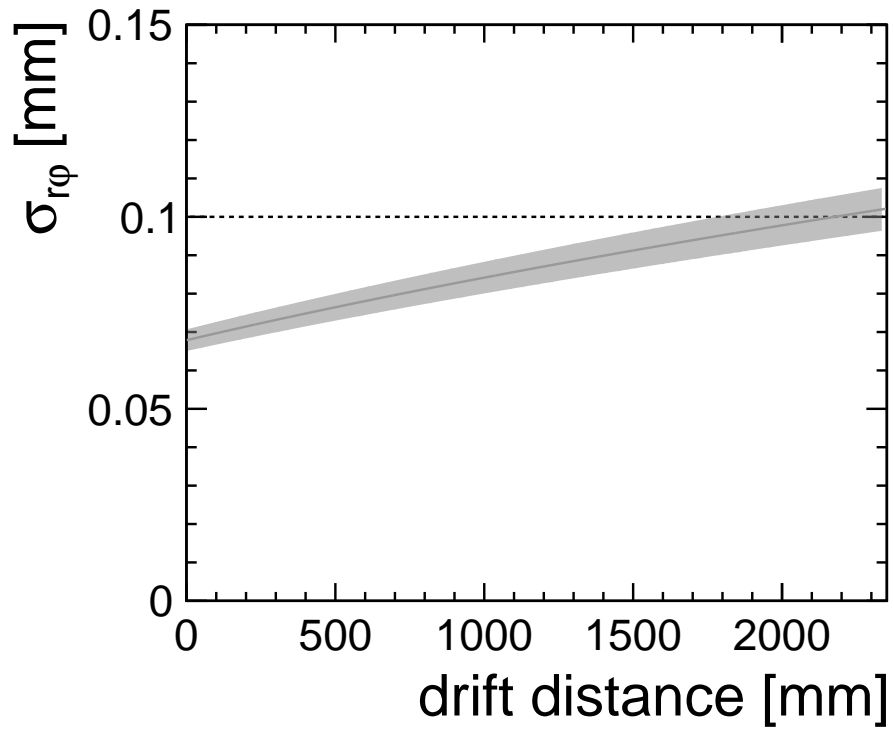


Figure 2: Single-hit point $r - \phi$ transverse resolution extrapolation to a magnetic field of 3.5 T based on parameters measured with the LCTPC prototype at 1.0 T. The resolution is plotted over the full ILD TPC drift length of 2.35 m including 1σ band without any attachment for a perfectly controlled gas. The extrapolated resolution at 2.35 m drift is $< 100 \mu\text{m}$, which fulfils the designed ILD-TPC transverse resolution requirement.

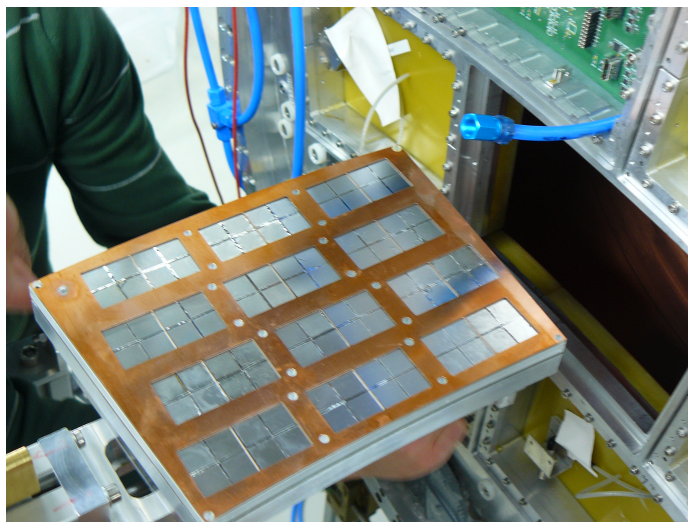


Figure 3: Fully equipped LP module with 96 GridPix detectors is being mounted in the LP.

257 tested. It is designed to operate on top of both a triple-GEM or a resistive Micromegas. The
 258 electron transparency of the GEM gating has been determined with different measurements
 259 and corresponds to 82% as expected from simulations. The ion blocking power is deemed
 260 adequate, but still has to be further elaborated and quantified. First measurements have
 261 been initiated with a fast HV switching circuit that has to be established and tested in
 262 B-field of 3.5-4 T. New electronics for R&D purposes based on the programmable ASICs is
 263 being developed within the LCTPC Collaboration. Despite the pulsed mode of data taking
 264 with power-pulsing, the readout electronics and the endplates will require a cooling system.
 265 A fully integrated solution has been already tested on seven modules during a testbeam.
 266 This two-phase CO₂ cooling is a very promising candidate. The new work on modules,
 267 update ion gating, cooling and electronics are to consolidate and improve an already proven
 268 results that a MPGD TPC can meet the ILD requirement for physics exploitation at the
 269 ILC.

270 The three options for the ILD TPC under consideration for the MPGD signal ampli-
 271 cation and readout are:

- 272 • GEM: the ionization signal is amplified by passing through a multi-layered structure
 273 with avalanche in the holes of the GEM foil and the charges collected on pads.
- 274 • Resistive Micromegas: the ionization signal is amplified between a mesh and the pad
 275 plane. The charge is induced on the pads under a resistive coating.
- 276 • GridPix: the ionization signal is amplified as for the Micromegas case, but collected
 277 on a fine array of silicon pixels providing individual pixel timing using Timepix ASICs.

278 For the GEM and Micromegas options, the typical pad sizes are a few mm² and spatial
 279 resolution is improved by combining the track signals of several adjacent pads. For the Grid-

280 Pix option, the pixel size of 55 microns matches the size of the mesh holes, providing pixel
 281 sensitivity to single ionization electrons. The GridPix spatial resolution is improved and the
 282 dE/dx PID enhanced by counting pixels or clusters. Overall, the LCTPC is conceptually
 283 ready as it meets design specifications and is engineeringly possible. Here, the single-hit
 284 transverse resolutions were shown from multiple testbeam campaigns at 1 T magnetic field
 285 and the extrapolated result at 3.5 T clearly demonstrate that single point resolution of 100
 286 μm over about 220 points is achievable with MPGD technology (GEM, MM or GridPix).
 287 This translates from simulation to the desired two-hit separation of $\sim 2\text{mm}$ and a momen-
 288 tum resolution $\delta(1/p_T) \simeq 10^{-4}/\text{GeV}/c$ (at 3.5 T), which is the required performance of
 289 the TPC as a standalone tracker at ILD for ILC. Measurements on dE/dx and ion gating
 290 also confirms the needed performance at ILC. Those results and conclusions are based on
 291 an established experimental R&D program.

292 The framework set by the LCTPC international Collaboration and with the Interna-
 293 tional Development Team (IDT) for the realization of the ILC in Japan offer a window of
 294 opportunities for a significant engagement of the LCTPC American observer institutions
 295 with dedicated funding for advancement in instrumentaion. MPGD TPC technologies can
 296 be linked with other application domains where MPGD are bringing benefits and synergy
 297 with other areas of applied physics reported at the Instrumentation Frontier that relies on
 298 microscopic structure devices. North America has infrastructures in place at national labo-
 299 ratories and universities to enhanced and guide the development of instrumentation based
 300 on micro pattern detectors for ILC.

301 2 Belle II Upgrade

302 Intensity frontier experiments, particularly those at the B Factories, require high-precision
 303 tracking for fairly low-momentum tracks in the presence of high event and beam-induced
 304 background rates. Such experiments typically rely on drift chambers to measure helical
 305 segments of charged tracks with a minimal material budget. Operational experience in the
 306 early stages of Belle II, the current state-of-the-art B Factory experiment, has shown that
 307 the drift chamber technology may be reaching its limit due to high occupancy. To address
 308 this issue, the Belle II Collaboration has developed and simulated a first conceptual design
 309 for a TPC-based tracking system for a hypothetical future Hyper- B factory experiment.
 310 For convenience and concreteness, it is supposed that SuperKEKB and Belle II will be
 311 superseded by "HyperKEKB" and "Belle III", operating with the same beam energies but
 312 with five times the maximum instantaneous luminosity ($5.0 - 6.5 \times 10^{35}\text{cm}^{-2}\text{s}^{-1}$), and
 313 assume that the proposed tracking system is surrounded by existing Belle II components.
 314 However, in principle the concept is equally suitable for a Belle II upgrade or a future,
 315 unrelated intensity-frontier experiment.

316 In the Belle III scenario, the geometry is constrained by the existing PID and elec-
 317 tromagnetic calorimetry systems. With this constraint, three competing proposals were
 318 considered. The first is an upgraded drift chamber. This solution is challenged and al-
 319 most unsuitable given the current challenges of operating Belle II's drift chamber (CDC) at

320 SuperKEKB current instantaneous luminosity. The second option is a full silicon tracker.
 321 Preliminary simulations of such a system is found to significantly degrades the p_T resolu-
 322 tion of tracks due to increased multiple scattering. This, coupled with the intrinsic cost and
 323 structural difficulties of such a system, suggests that such a system might not be suitable.
 324 The third option is a TPC-based tracker, which should provide a significant reduction in
 325 occupancy because it is a true three-dimensional detector, while drift chambers are effec-
 326 tively two-dimensional. However, a TPC tracker has some intrinsic limitations: it cannot
 327 provide a trigger signal as the CDC does, and event pileup can be very high due to the
 328 long electron drift time. Other questions raised by the tracking TPC concept, include (i)
 329 reliable association of tracks with unique events despite a high degree of event overlap (ii)
 330 beam-induced background hits (iii) ion backflow mitigation with possible continuous read-
 331 out design (without gating) at high physics event rates. Overall, can a TPC match the
 332 tracking performance of a CDC by using a high number of space-time points to overcome
 333 the limitations of diffusion? These problems can be overcome based on a conceptual design
 334 that addresses such challenges.

335 For the preliminary results presented here, the current Belle II CDC is replaced by a
 336 TPC with a single drift volume and readout on the backward endcap. Second, the current
 337 silicon vertex detector (VXD) is replaced with a new detector, which is based off the VTX
 338 upgrade proposal [REF: VTX EOI?]. In order to maintain an annular cylinder geometry
 339 for the TPC, we extend the VTX from to a radius of 44 cm. Third, a multilayer fast timing
 340 detector, possibly silicon, placed at $r = 25$ cm or $r = 45$ cm is used in order to replace
 341 the triggering role of the CDC and additionally provide particle identification (PID) via
 342 time-of-flight (TOF) for low- p_T tracks.

343 In order to focus on these key challenges instead of more basic technical design optimiza-
 344 tions, Belle II preliminary study borrow heavily from work already done by the LCTPC
 345 Collaboration for the ILD TPC. The basic conceptual design consists of a single gas vol-
 346 ume of length 242 cm with high-resolution readout tiling the backward endcap without
 347 ion gating with continuous data taking mode. It is assumed assume that the TPC uses
 348 atmospheric pressure T2K gas with a drift field (289 V/cm) that minimizes the drift time
 349 of electrons ($v_D = 7.89$ cm/ μ s, leading to a maximum drift time of roughly 30 μ s for a
 350 maximum drift length of 242 μ m). From the simulation, the longitudinal and transverse
 351 diffusion coefficients are $\sigma_L = 200$ μ m/ $\sqrt{\text{cm}}$ and $\sigma_T = 84$ μ m/ $\sqrt{\text{cm}}$. For charge amplifica-
 352 tion and readout, the GridPix system proposed for use in LCTPC is used with an array of
 353 $55\mu\text{m} \times 55\mu\text{m}$ pixels with a Micromegas mesh mounted onto the surface. As for the ILC
 354 TPC, this technology presents a number of advantages: first, the small pixels and direct
 355 mapping between amplification cells and pixels constitute essentially a best-case resolution
 356 scenario. Second, in theory such a sensor can be operated in binary readout mode in which
 357 each individual hit represents exactly one electron and consists only of the pixel ID and
 358 a threshold-crossing time ID. This can dramatically reduce the data throughput, which is
 359 anticipated to be a significant technical challenge at ultrahigh luminosities and with con-
 360 tinuous readout. Thirdly, the total number of ions produced during amplification can be
 361 far smaller, perhaps leading to a reduction in the number of backflowing ions. Finally, it is
 362 relatively easy to implement such a detector in the actual Belle II digitization simulation.

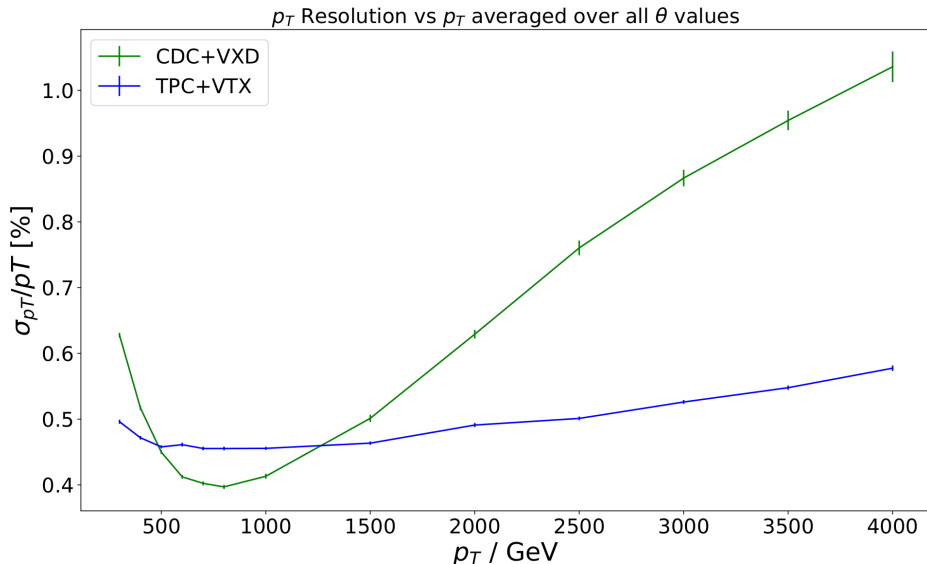


Figure 4: A comparison of the average p_T resolution for the CDC+VXD and TPC+VTX tracking systems.

363 The key question concerning tracking performance is whether the increase in the number
364 of spatial hit points (up to the theoretical maximum of number of ionizations) can win
365 out over thermal diffusion when determining tracking parameters. Here the focus of the
366 result presented is primarily on the transverse momentum p_T . A set of simulated muons in
367 discrete bins of p_T and distributed uniformly in θ over the acceptance of the TPC. Figure
368 4 shows the simulated p_T resolution for the current (CDC+VXD) versus the proposed
369 (TPC+VTX) tracking systems averaged over all track polar angles θ . The vertical offset
370 is due to multiple scattering, which is largely determined by the material budget of the
371 vertex detectors, which for the VTX is highly speculative. In principle, due to significant
372 thinning of each layer, the TPC+VTX should be able to achieve comparable or lower levels
373 of multiple scattering compared to the CDC+VXD. The linear slope in p_T , due to position
374 measurement resolution, is far shallower for the TPC compared to the CDC. This is due
375 to the large number of hit points in the TPC, rendering its effective point resolution far
376 superior to the hit resolution in the CDC. In conclusion, the simulated TPC result shows
377 that it is possible to match and even surpass the tracking resolution of the CDC. However,
378 the tracking performance in the critical range $p_T < 1$ GeV depends more strongly on the
379 amount of material in the VTX than it does on the differences between the CDC and TPC.
380 It is also found that binary readout with relatively larger pixels ($200\mu\text{m} \times 200\mu\text{m}$) is also
381 sufficient to meet the performance objectives of the tracking system of Belle III, which
382 decreases the channel count and data throughput of the system, perhaps offsetting some of
383 the costs.

384 Based on these studies, a gas TPC-based tracking system seems viable for an intensity
385 frontier experiment like the hypothetical Belle III. This conceptual design relies heavily on
386 the capabilities of the GridPix sensor, particularly the association of a single pixel with a
387 single electron with low ion backflow and excellent 3D resolution. The primary difficulty

388 of such a system is the tiling these sensors over the $> 3\text{m}^2$ endplate. However, it offers an
389 amazing opportunity for groups in the US interested in R&D for MPGD for future upgrade
390 with the Belle II detector.

391 **3 TPC for CEPC**

392 The Circular Electron Positron Collider (CEPC) has been proposed as a Higgs/Z factory
393 in China. The baseline design of CEPC tracking system consists of a vertex detector with
394 three concentric double-sided pixel layers, a high precision (about $100\ \mu\text{m}$) large volume time
395 projection chamber (TPC) and a silicon tracker on both barrel and end-cap regions. The
396 tracking system has similar performance requirements to the ILD detector in ILC detectors
397 but without power-pulsing, which leads to additional constraints on detector specifications,
398 especially for the case of machine operating at Z-pole energy region with high luminosity.
399 Until a decision on a tracker for a future circular collider in China can be reached, a
400 number of tasks are still remaining regarding the TPC research. Such tasks include the
401 full simulations of the TPC performance in the CEPC environment, cooling, further design
402 of the readout electronics, and calibration methods. Some of the key challenges to be
403 addressed in the near future is the physics requirements for the TPC performance towards
404 the inclusive CEPC physics program. MPGD technology, though quite far advanced in
405 some aspects, still needs a significant effort from key partners. Nonetheless, the CEPC
406 TPC requirements and challenges for the detector are very similar than the ones described
407 for the ILD TPC, and thus achievable with existing possible MPGD technologies. R&D
408 activities in actively ongoing in China and could potentially lead to partnership with the
409 USA.

410 Overall, the TPC at CEPC has been inspired by the ILC-TPC development. Contrary
411 to the ILC, Z-pole running at CEPC with luminosity of about $10^{36}\ \text{cm}^{-2}\ \text{s}^{-1}$ prevents gating
412 mode TPC operation. Hence, one area of research specific to CEPC is a high-gain, low ion-
413 backflow double micro-mesh gaseous structure which shows good promise. In this situation,
414 GridPix is also an attractive option, which provides the high granularity needed to resolve
415 individual electron clusters and to determine energy loss by the cluster counting technique.
416 The CEPC TPC requires transverse ($r - \phi$) single-hit space-point resolutions of less than
417 $100\ \mu\text{m}$ and longitudinal (Z) time resolution of about $100\ \text{ns}$. The physics goals requires
418 dE/dx resolution of less than 5% and particle identification separation at $\sim 2\%$ level with
419 cluster counting. Most conditions set by the CEPC tracking systems can be met by MPGDs
420 as proven by LCTPC effort. Such detector development offers a possibility for partnership
421 between the US and China.

422 **4 Other Applications and Synergy**

423 In the previous sections, the focus was on MPGDs for the International Large Detector
424 (ILD) at the International Linear Collider (ILC), (ii) the Belle II upgrade at SuperKEK
425 B-Factory, and (iii) the TPC for a detector at the Circular Electron Positron Collider

426 (CEPC). Despite the mention of only those initiatives, radiation detection through the
427 ionization in micro-pattern gas amplification devices has many fields of applications ranging
428 from particle, nuclear and astro-particle physics experiments with and without accelerators.
429 MPGDs are applicable as well in medical imaging and homeland security screening. Several
430 new micro-pattern gas amplification concepts, such Thick-GEMs (THGEM) or patterned
431 resistive-plate devices, are also under study for calorimeter and muon systems. To name only
432 two examples of synergy between TPC-tracking and other instrumentation development,
433 particle-flow algorithm from continuous detection in MPGD devices promises to deliver
434 calorimetry excellent jet energy resolution, while large sensitive area MPGDs serves as
435 natural logical choices for muon systems at future multi-purpose 4π spectrometers.

436 In some tracking applications coarse patterned readout can be used for experiments re-
437 quiring very large-area coverage with moderate spatial resolutions. Such conceptual design
438 of the newest micro-pattern devices are in fact quite suitable for production and devel-
439 opment with industrial partners as it was proven for recent deployment of LHC detector
440 upgrades from Run3 onwards. MPGD have indeed been proven to be a natural choice of
441 technologies for large sensitive area for muon systems as demonstrated by CMS and ATLAS
442 who recently upgraded part of their muon systems. CMS opted for GEM; while ATLAS
443 used Micromegas staggered with small-strip Thin Gap Chamber (sTGC). Both CMS and
444 ATLAS have numerous institutions from the United States funded by DOE or NSF who
445 participate in the deployment of the upgraded MPGD-based muon detectors. There have
446 been major recent MPGD developments for ATLAS and CMS muon system upgrades (from
447 Run 3 onwards) that established design concepts and technology goals; while addressing en-
448 gineering and integration challenges. The ATLAS resistive Micromegas are set to suppress
449 destructive sparks in the high rate environments, while the CMS GEM single-mask with
450 self-stretching techniques enable the reliable production of large-size foils and significantly
451 reduce detector assembly time. For examples, (i) the completion of the ATLAS New Small
452 Wheels for Run3 relied on the expertise of the TRILAB company in Nevada for the precise
453 machining, etching and pressing of anodes boards of meter-scale anode boards for sTGC
454 that shares and employs very similar attributes than MPGD readouts; while (ii) many
455 groups from the US participated in the GEM deployment of the stations GE1/1 and GE2/1
456 to complement Cathode Strip Chamber (CSC) in the CMS Muon endcaps. MPGD are
457 foreseen as a technology of choice for the future upgrades at HL-LHC operation from 2025
458 onwards. Indeed, MPGDs are planned for further upgrades of the muon systems of CMS
459 and ATLAS based on GEMs with high granularity spatial segmentation and small-pad re-
460 sistive Micromegas, respectively. The development of fabrication techniques of MPGDs for
461 LHC upgrades towards HL-LHC showed that large-scale applications is possible from design
462 to deployment with a cost-effective manufacturing where the US can potentially play a role.

463 Several groups in the world, who often collaborate with US groups, have developed the
464 ability to either produce large PCB boards or stretch large-area meshes for the construction
465 of MPGD devices. Researchers at the Florida Institute of Technology in Melbourne, Florida,
466 USA, are developing under a grant from the U.S. Department of Homeland Security GEM
467 detectors that utilize cosmic ray muons for homeland security. The readout electronics
468 needed for MPGDs share many common attributes than the electronics for silicon detectors;
469 so this this should be kept in mind when taking a global look at detector development.

470 MPGDs can also fulfill the stringent experimental constraints imposed by future nuclear,
471 hadron physics experiments, and heavy ion facilities. Another example would be GEM
472 or Micromegas operating at the Electron-Ion Collider (EIC), offering intrinsic high-rate
473 capability (10^6 Hz / mm^2), spatial resolution (down to $30 \mu m$), multi-particle resolution
474 ($\sim 500 \mu m$), and superior radiation hardness. Although normally used as planar detectors,
475 MPGDs can be bent to form cylindrically curved ultra-light inner tracking systems, without
476 support and cooling structures. Again, those attributes shows how effective MPGD can be
477 on flagship projects driven by the US P5 community.

478 **References**

479 [1] Here Reference, “Journals”. They are need for ALL sections. To come...