

Beam Tests of the First CMS HGCAL Tileboard Prototypes

Analysis of DESY Test Beam Data from 2020

Malinda de Silva

On behalf of the CMS collaboration


CALICE Collaboration meeting

25th February 2021

HELMHOLTZ RESEARCH FOR
GRAND CHALLENGES






UNIVERSITÄT
HEIDELBERG
ZUKUNFT
SEIT 1386



High Granularity for the High Luminosity LHC

Phase II Upgrade of the CMS End-Cap Calorimeter (HGCAL)


- The phase 2 upgrade of the CMS detector will replace the current endcap calorimeter with a high granularity calorimeter (HGCAL)
- The active area of CMS endcap calorimeter (HGCAL) will consist of:
 - silicon detector component : Silicon sensors
 - **scintillator component : SiPM-on-tiles**
- The Silicon and SiPM-on-Tile technology, originally developed for e+e- colliders by the CALICE collaboration

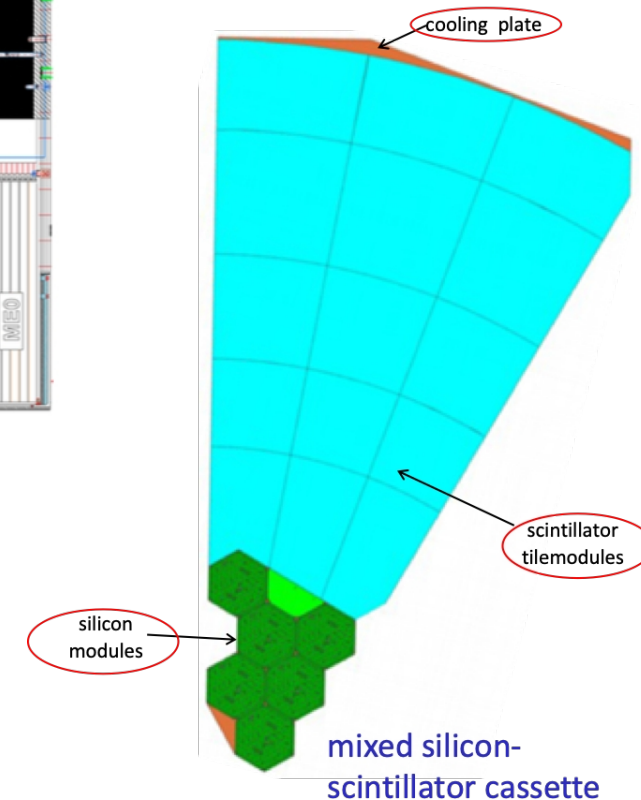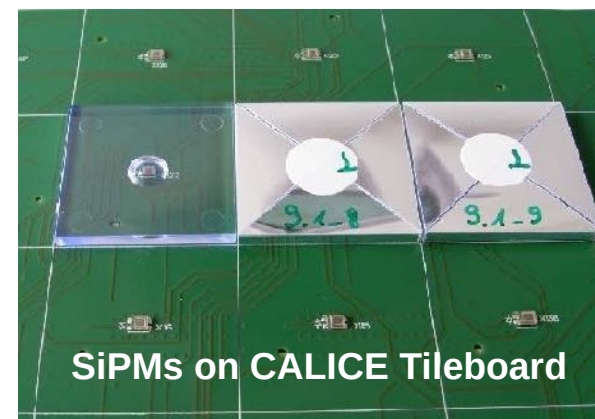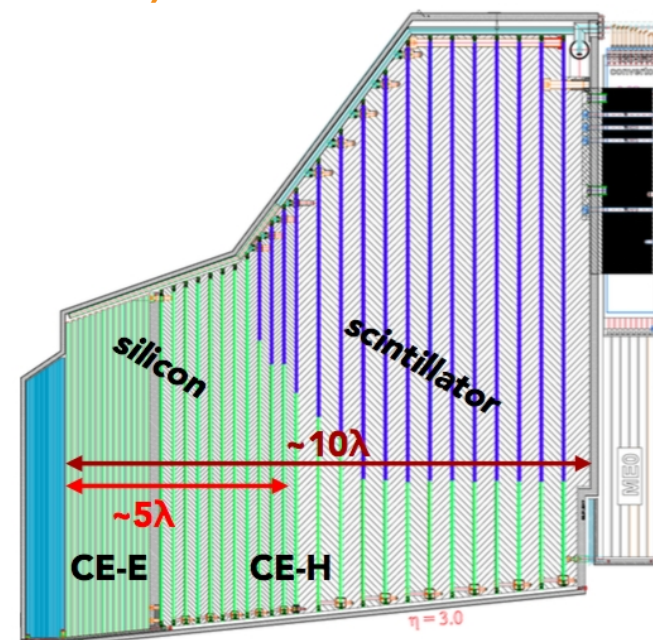

Scintillator Component of the Hadronic Endcap Calorimeter


Tileboard and Front End Electronics

- The signals from SiPM-on-tiles are read out by the HGCROC front end electronic ASIC
 - Final version under development
- Tileboards hold the SiPMs, scintillators, on-board electronics and LED system.
 - Increases in size when going away from the beamline

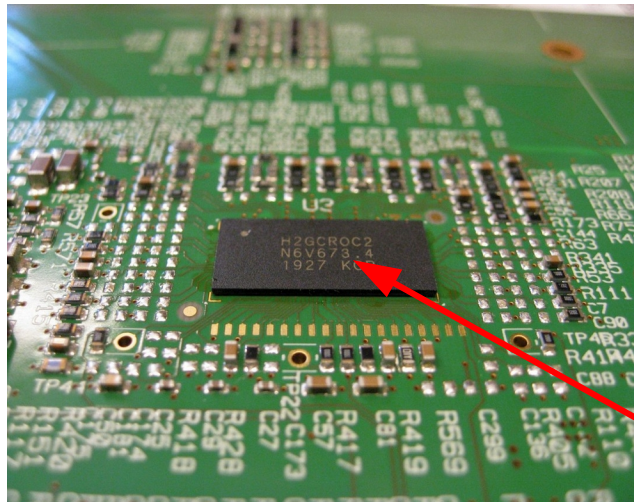

Scintillator tiles on the front side of the tileboard

HGCROC on the back side of the tileboard

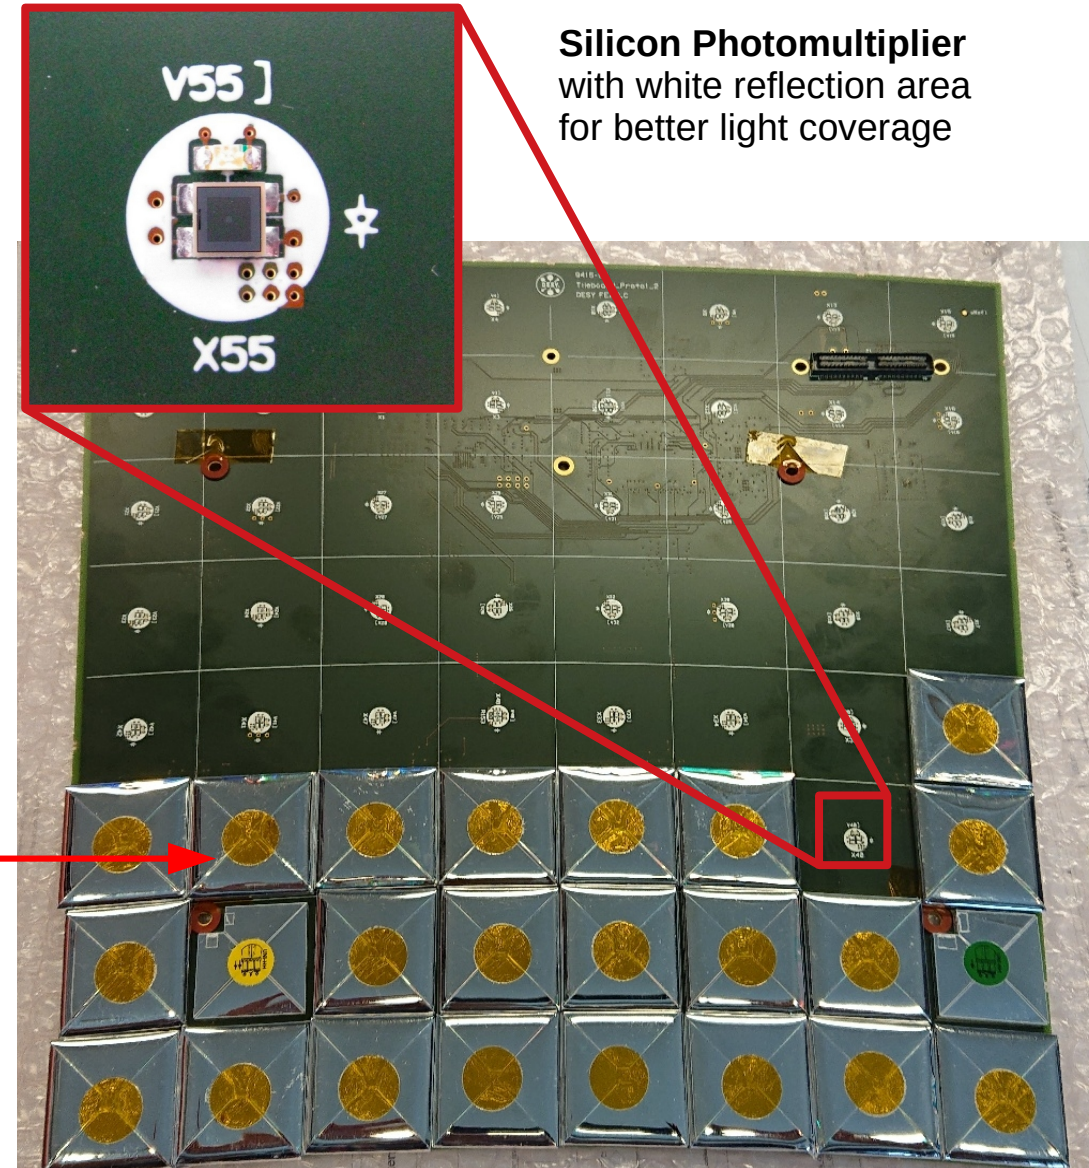


Silicon Photomultiplier with white reflection area for better light coverage

HGCROC(v2) Front End Read Out ASIC

Introduction

- HGCROC(v2): Latest prototype of the front end read out ASIC to be used in the CMS HGCAL
 - CMOS 130 nm (TSMC) technology
- Two versions:
 - Silicon version: HGCROC
 - **SiPM version: H2GCROC**
 - Additional current conveyor for amplification
- Integrates up to 72 channels to read out
- Measurements:
 - Charge:
 - **ADC (Pulse Amplitude)** : low gain
 - Time over Threshold (TOT) : high gain
 - Timing:
 - Time of Arrival (TOA)

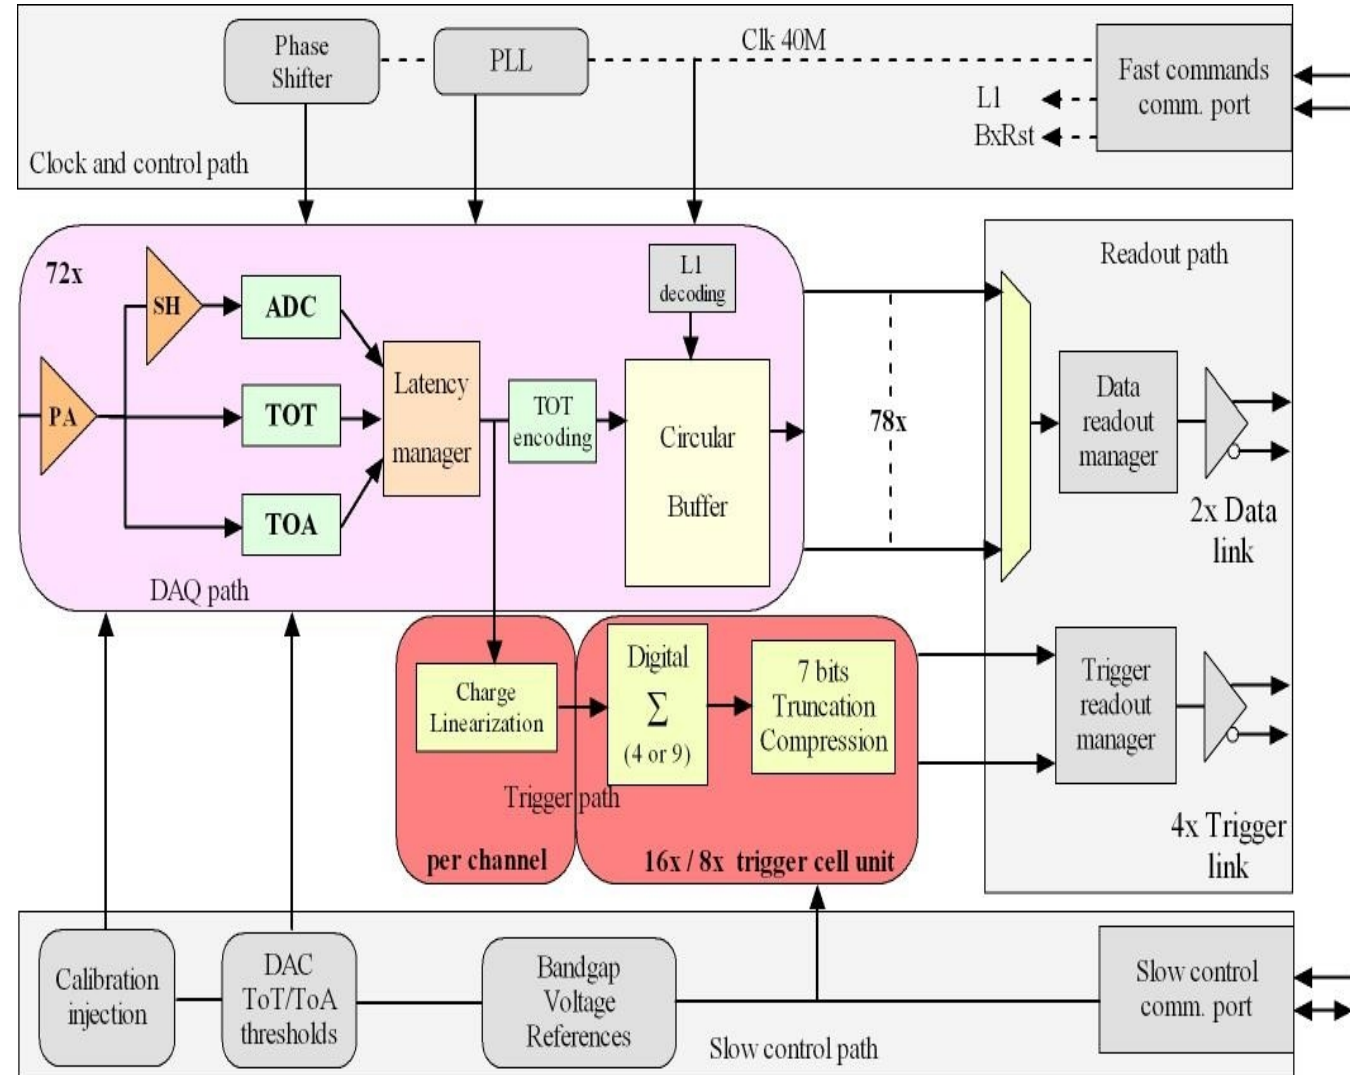

Tileboard at the DESY Test Beams 2020

The First Prototype of the CMS HGCAL Tileboard

- Tileboard (TB 1.2) was tested at the DESY test beam facility in 2020
- The lower half of tileboard is equipped with:
 - **SiPMs** used were Hamamatsu HDR-2 type photomultipliers custom made for the HGCAL upgrade
 - 12 x unirradiated 15 μm pitch, **2 mm²** area SiPMs
 - 12 x unirradiated 15 μm pitch, **4 mm²** area SiPMs
 - One of each SiPM above **irradiated** to expected end of life dose
 - **Scintillator tiles**
 - MEPHI produced injection-moulded tiles
 - IHEP cast tiles (BC-408)
 - CALICE reference tiles






Tileboard at the DESY Test Beams 2020

Beam Test Setup

- KCU105 module is used for data acquisition
 - Commercially available FPGA evaluation board


- Measurements:
 - For different over-voltages and conveyor gains
 - **SPS data using LED system** (7000 events per channel)
 - **Beam data with 3 GeV electrons** hitting each channel (10,000 events per channel)

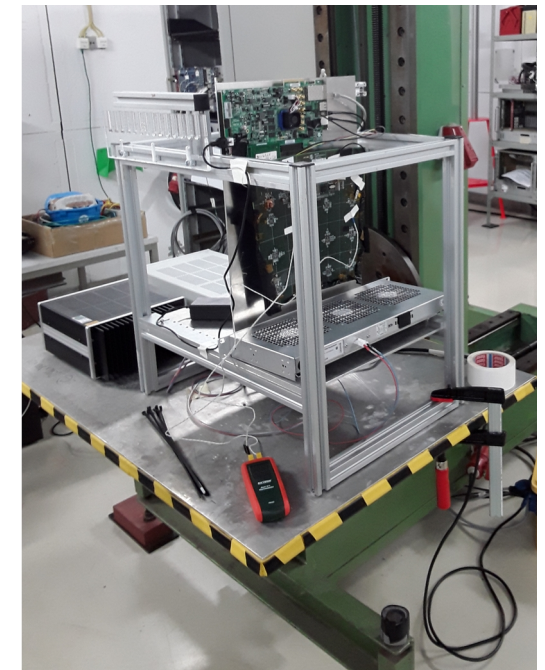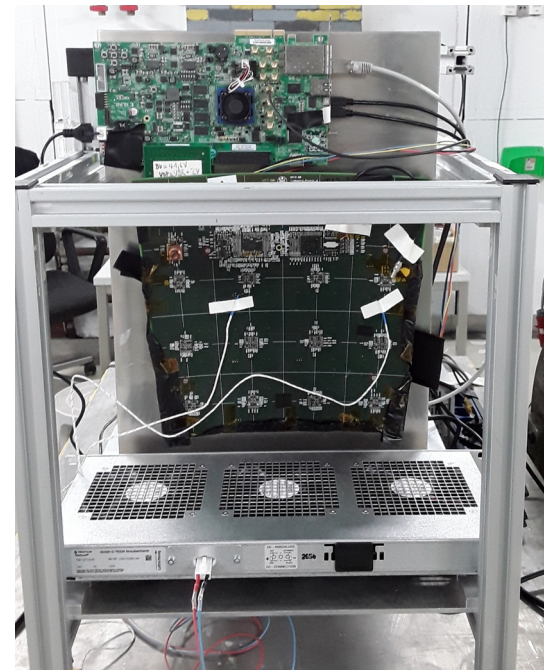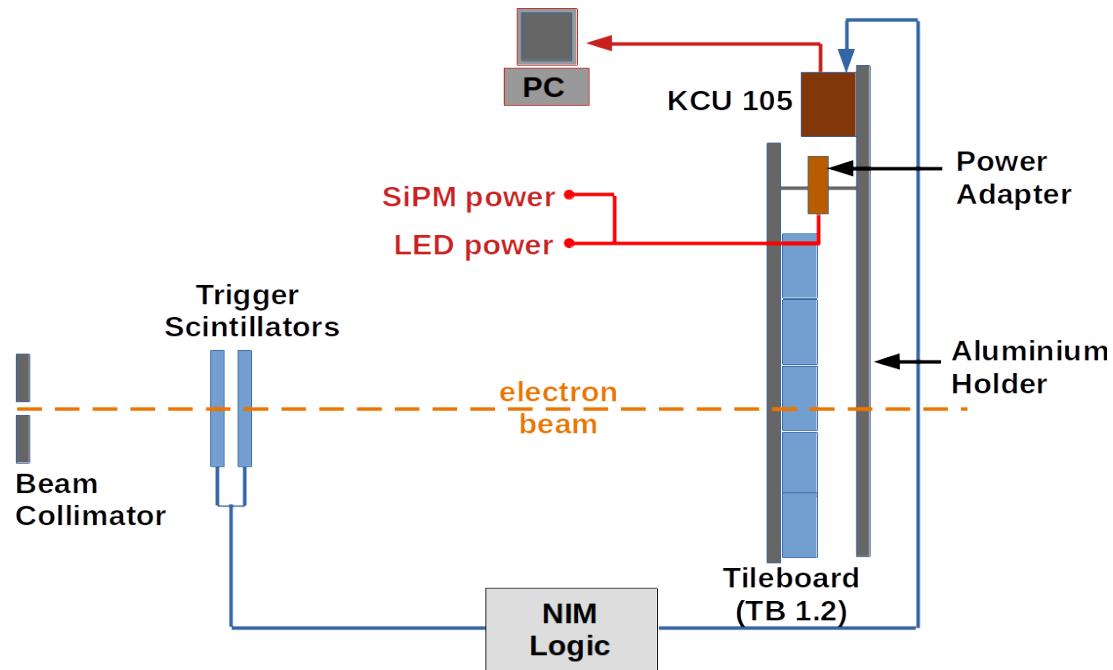

SiPM-on-Tile technology


Calculation of Light Yield

- MIP calibration from beam data:
 - Energy deposited in the scintillator tile follows a convoluted Landau-Gaussian function

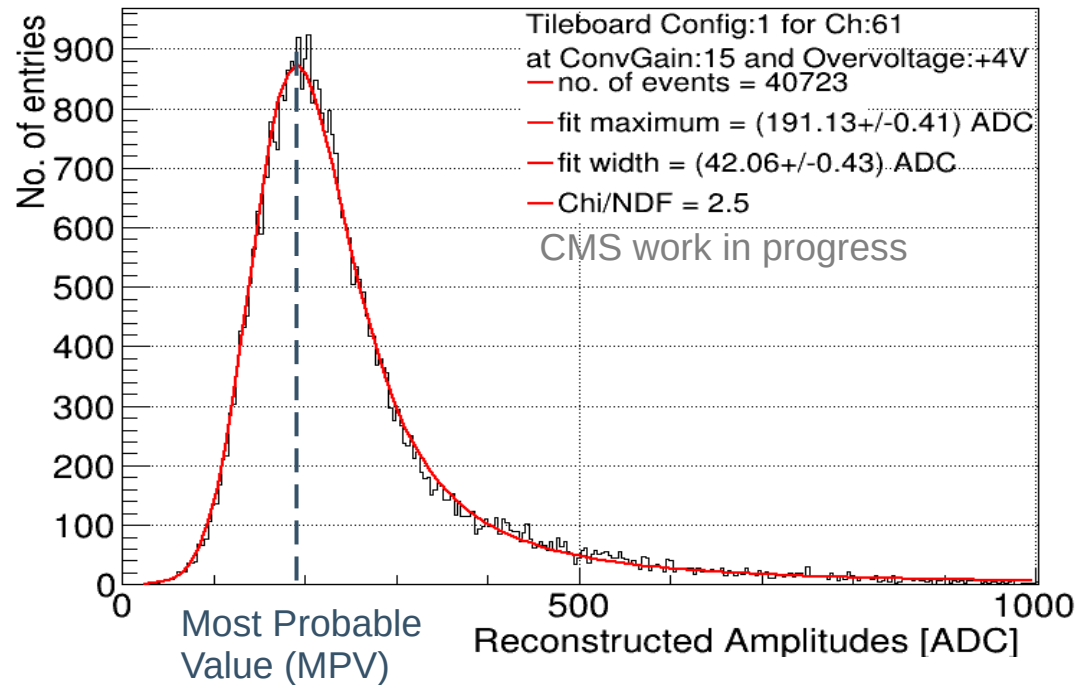

No. of photons captured (Light Yield) is given by dividing the MPV of the signal by its SPS gain in photon equivalent units (p.e.).


- Single photon counts:
 - Using the low intensity LED to fire few individual cells of the SiPM.
 - Results in a single photon spectrum (SPS)
 - Average separation between individual peaks → gain

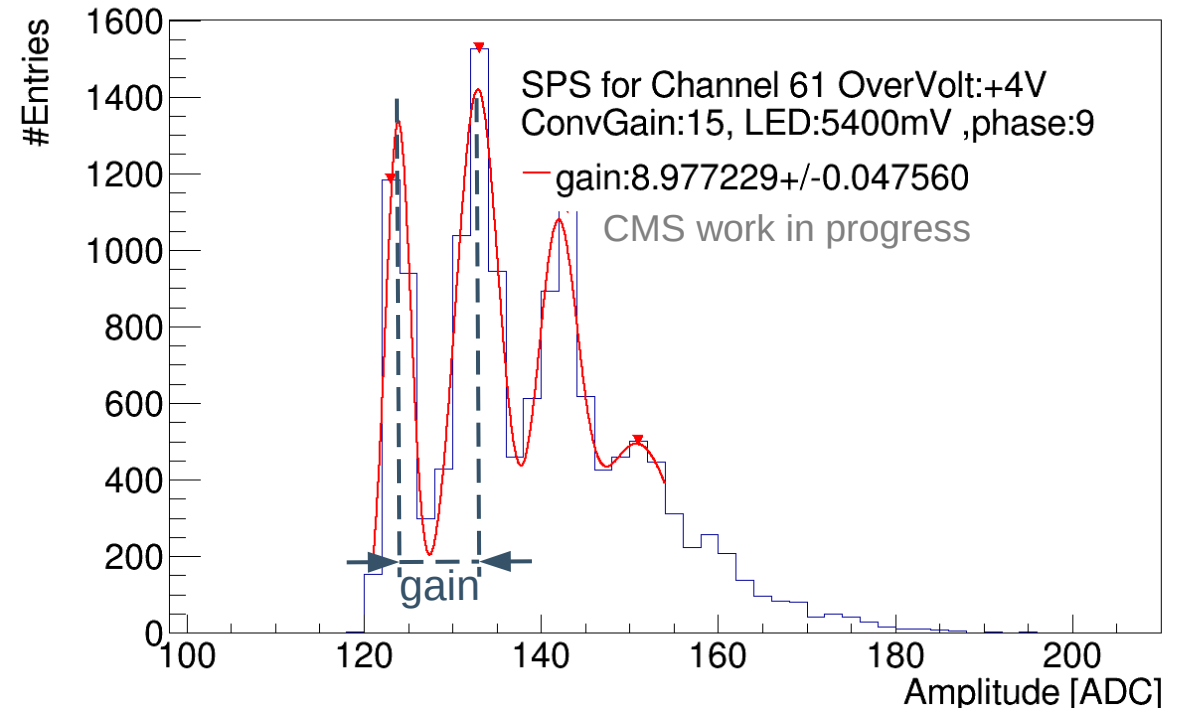

Calibration Data from the October Testbeam

Using LED system



- SPS is visible at **over-voltages +4V and above** in most channels for **conveyor gain = 15** (highest possible)
 - DNL presently prevents from calculating gains at lower over-voltages and conveyor gains
- Final version of the tileboard to be installed in HGICAL is expected to run at conveyor gain = 4 and over-voltage = 2V
 - Best S/N ratio at end of life expected at these values
 - **Requires further R&D to obtain estimates of SPS from lower conveyor gains at over-voltage 2V**

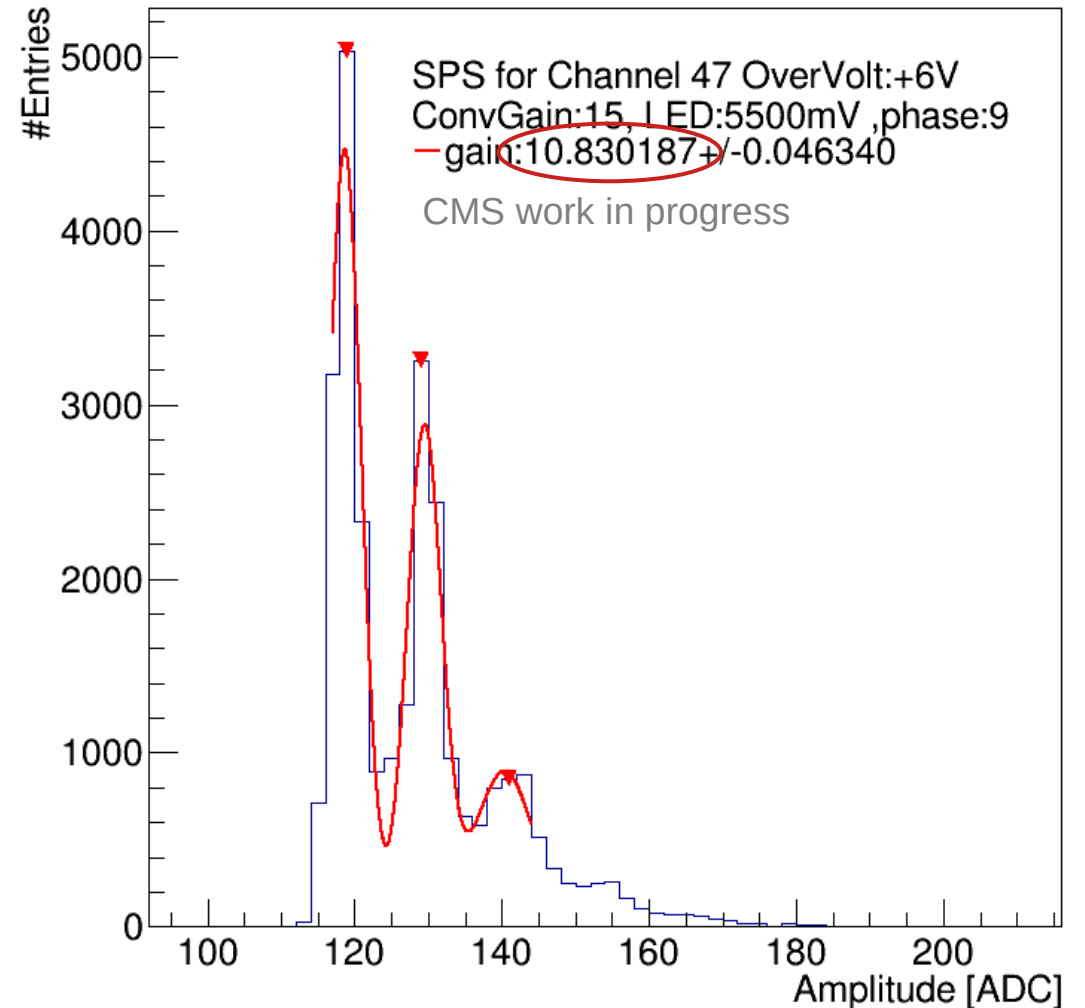

Pulse Fit Correction


Optimization of Fit Parameters

- HGCROC samples the signal at 40 MHz corresponding to the collision frequency
- DESY beam is **non-synchronous to the system**. Therefore pulse maxima needs to be extracted offline
- Pulse amplitude is reconstructed from the maxima of a multi-sample event-by-event template fit
 - 6 points sampled at 25 ns rate per event are fitted using a skewed-Gaussian fit with fixed std. dev. and skewness.
 - Fixed parameters based on pulses from sampling scan using the LED system
- **First ever beam particle signal observed using the HGCROC**

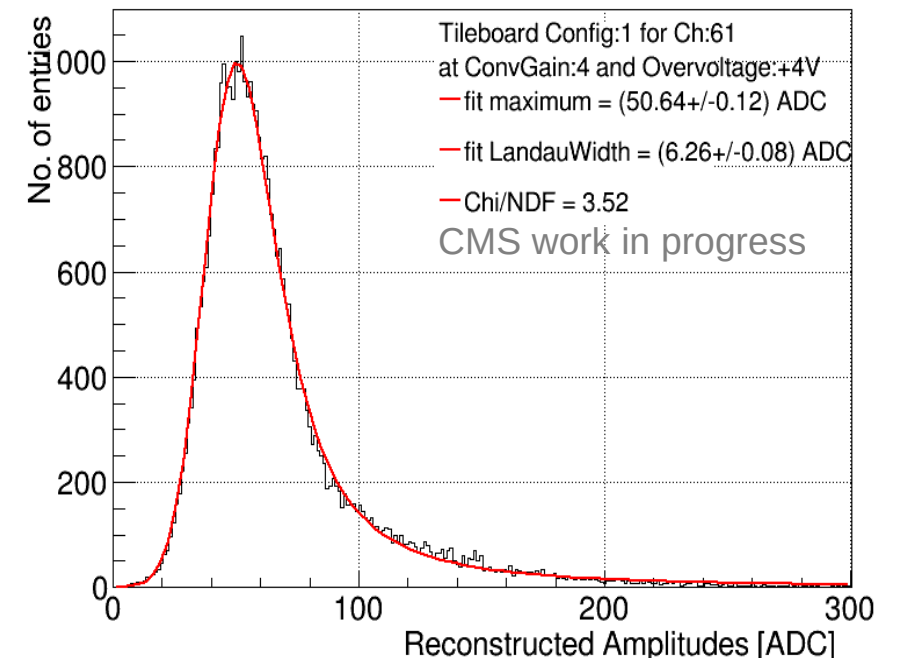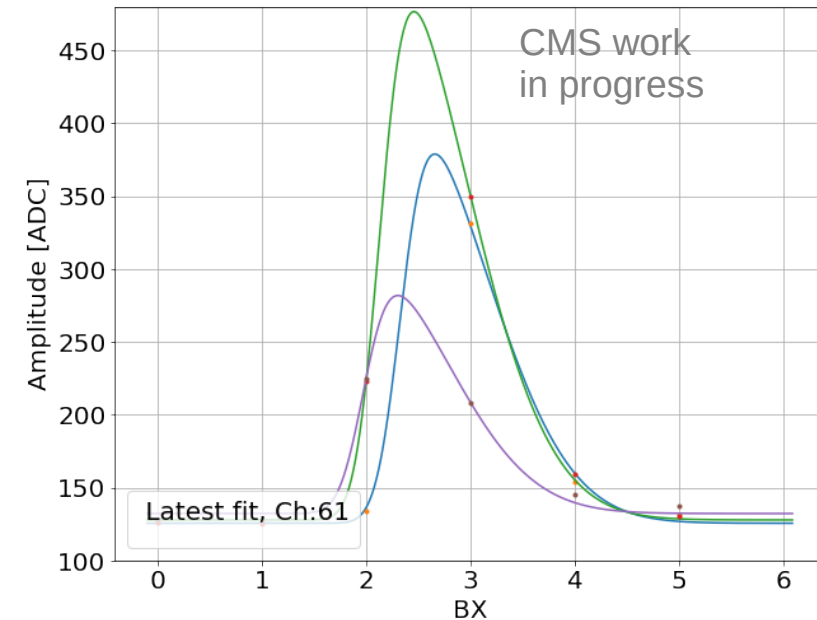

Dependence of MIP MPV with Current Conveyor Gain


From October Testbeam

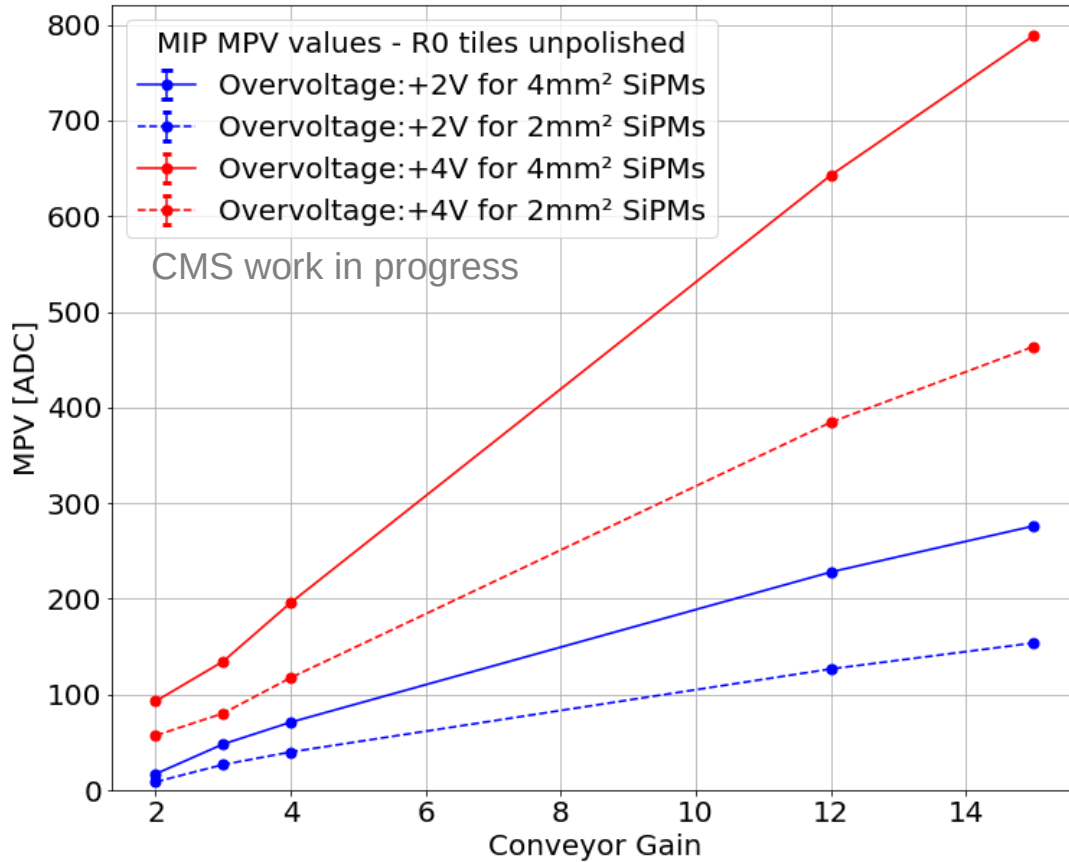

- MPV appears to increase linearly with conveyor gain for all channels.
- **Light yield analysis is not presently possible for conveyor gain < 15** as SPS is only observable for conveyor gain = 15 at over voltage = 4 V and above.

Light Yield Comparison

Envelope-type Foil Wraps – Molded, Cast and CALICE tiles

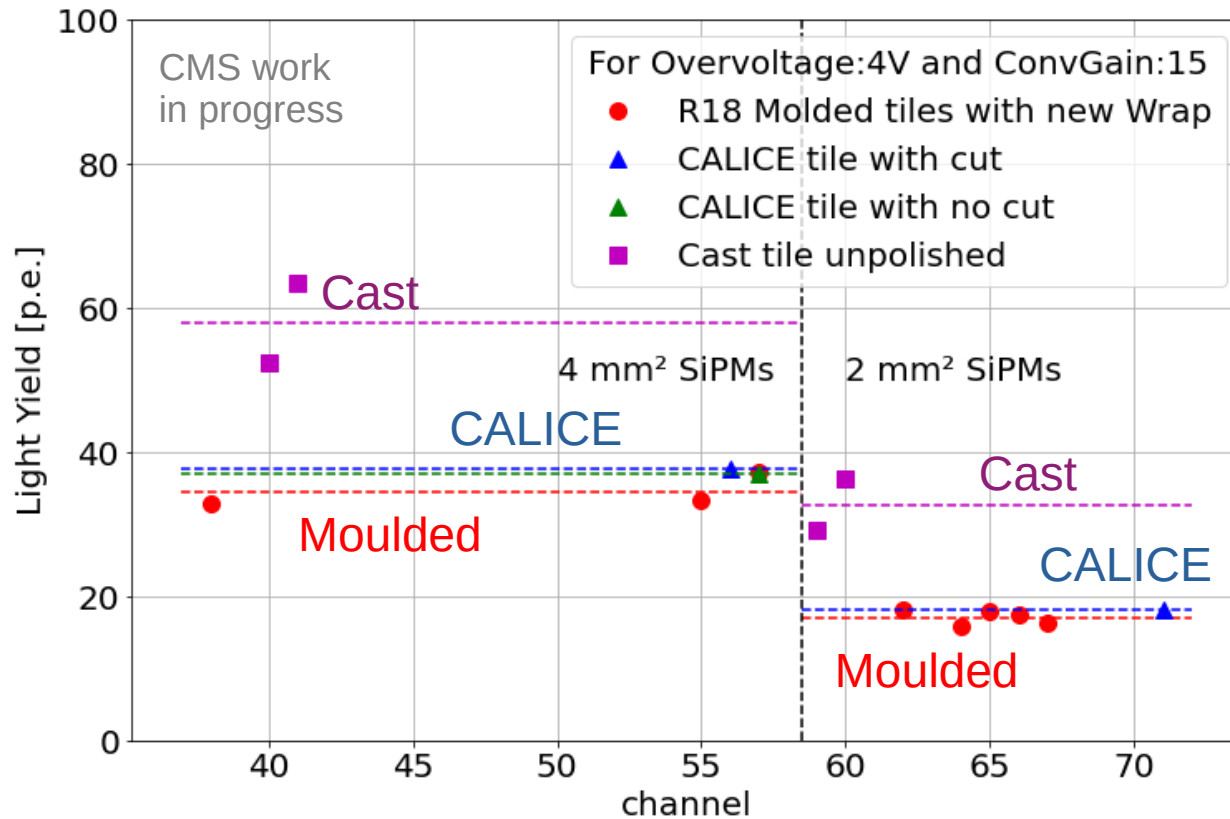


- Light yield comparison for different SiPMs **looks consistent with scaling by active area** for most tiles

$$\bullet \frac{LY_{4mm^2 SiPM}}{LY_{2mm^2 SiPM}} \simeq 2$$

- Cast tiles appear to have a **factor 2 higher light yield** than molded tiles as expected
- Small discrepancy for cast tiles on 4mm² SiPMs
 - Due to large scatter of measurements and small statistics

Light Yield Comparison

Cast Tiles – Different Sizes

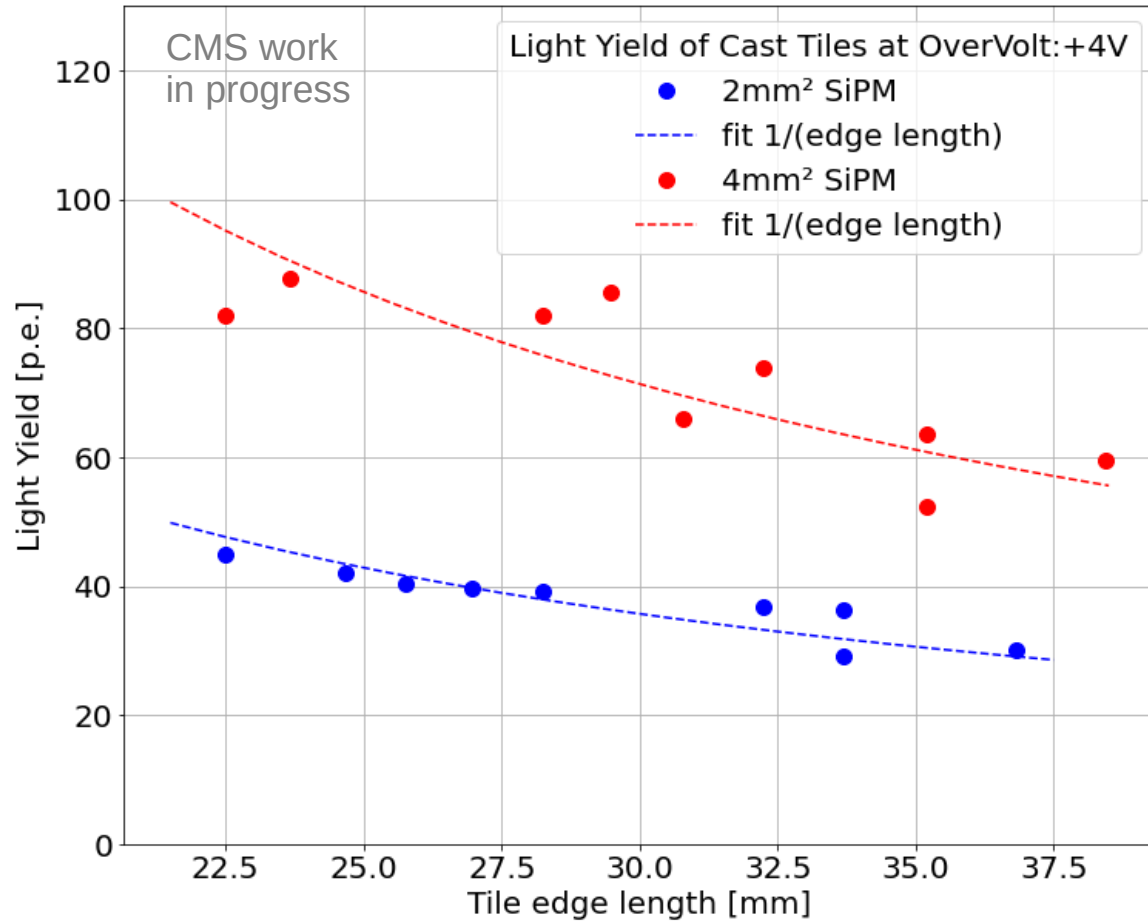


- Light yield (LY) decreases as a function of tile size (A) as:

$$LY \sim \frac{1}{\sqrt{A}} \sim \frac{1}{\text{tile edge length}}$$



- Consistent with results
- Fits using all available cast tiles show that the ratio between 4mm² and 2mm² tiles is ~2 as expected.

Irradiated SiPM pulses

Basic Pulses from both channels

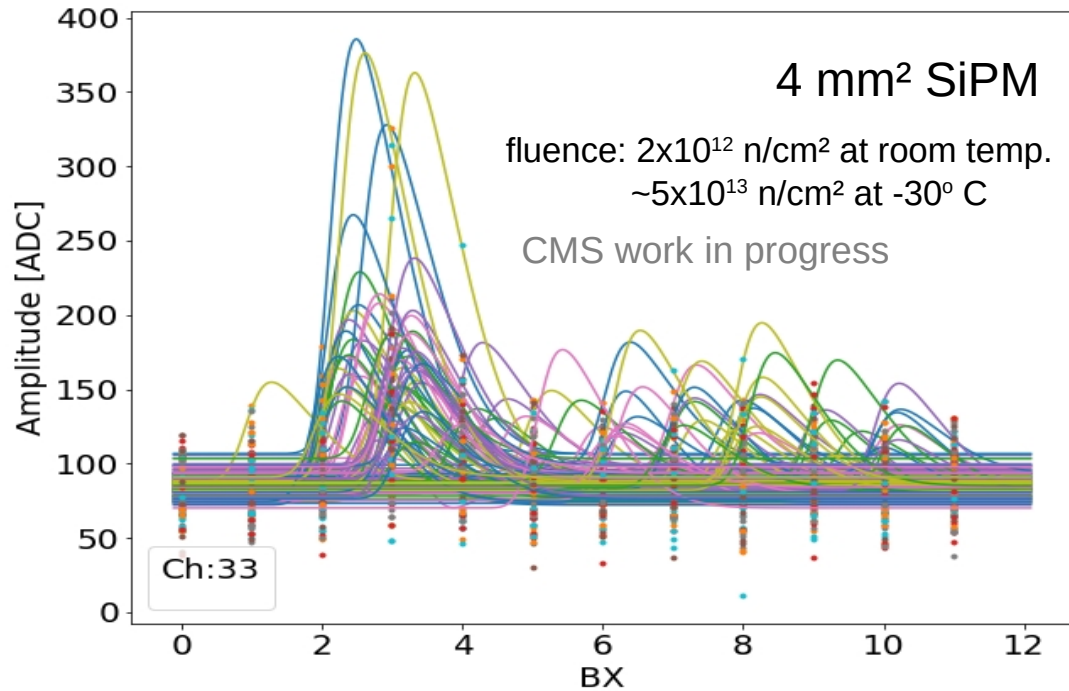

- 12 samples were taken for irradiated SiPMs
- Pulse max expected between Bx 2 and 4
 - Seen in results
 - Other Bx: Pedestal fluctuations
- **It is possible to extract a signal from irradiated SiPMs**

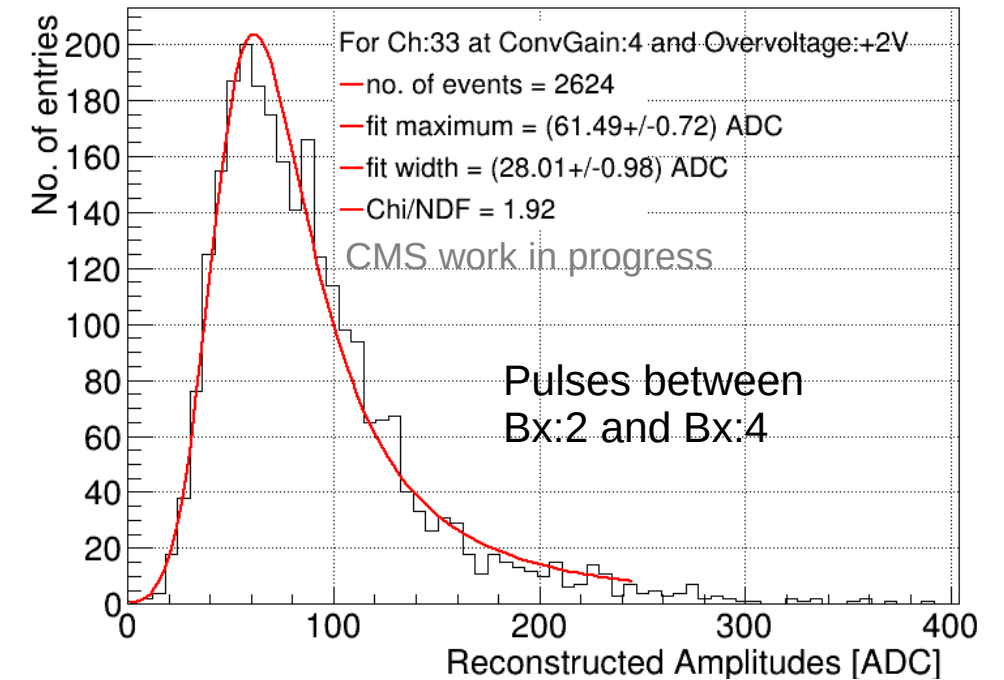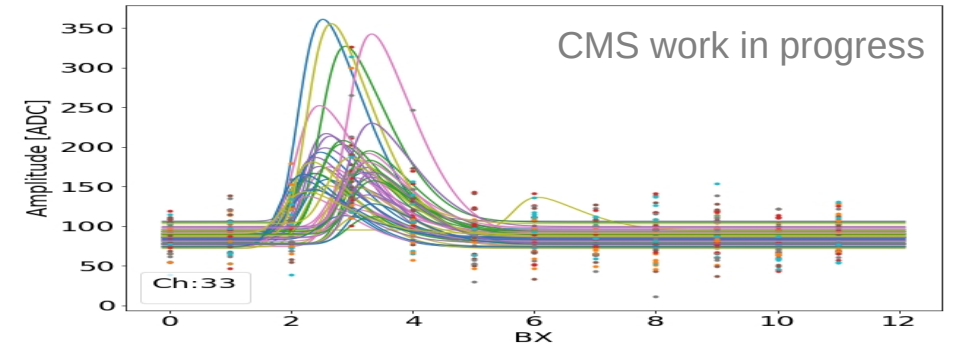

- Pulse width is roughly consistent with the width of the unirradiated signal and the noise after irradiation

March 2021 DESY Test Beam

Introduction

- The latest testbeam at DESY took place between 15th and 20th March 2021.
- Two tileboards (TB1.2.2 and TB1.3) were tested at the test beam
- SiPMs:
 - **TB1.2.2 (same board tested at previous test beams):**
 - Hamamatsu HDR-2 SiPMs of 2 mm² and 4 mm² active area with custom radiation hard packaging
 - 15µm pitch size
 - Non-irradiated (2x12) and irradiated (2x1)
 - **TB1.3 (untested at test beams):**
 - Hamamatsu HDR-2 SiPMs with custom radiation hard packaging
 - 15 µm pitch with active areas 2mm², and 4mm²
 - **10 µm pitch with active areas 4 mm² and 9 mm²**



Objectives

Test beam at DESY 2021

- TB1.2.2:
 - **Observe light yield dependence on SiPM size for IHEP injection-moulded tiles as was observed in cast tiles at previous beam tests**

$$LY \sim \frac{1}{\sqrt{A}} \sim \frac{1}{\text{tile edge length}}$$

- Measure MPV from irradiated SiPMs at overvoltage of 1.5V
 - Electromagnetic shower data analysis using TOT scale
- TB 1.3:
 - Measure and compare light yields with results from TB1.2.2
 - Ensure reproducibility of light yields for 15 μm pitch SiPMs
 - **Measure light yields from 10 μm pitch SiPMs**
- **Tileboards worked as expected. Analysis on the way!**

Summary and Outlook



CMS HGICAL Test Beams

- SiPM-on-Tile technology developed by the CALICE collaboration is being applied as part of the HGICAL upgrade
- The test beams at DESY gave the **first beam particle results from the front-end electronics to be used at the HGICAL**
- The template fit method used to extract the pulse amplitude can be applied to other asynchronous particle sources, like cosmic rays
- The test beam also compared many SiPMs, tiles of different sizes, wrappings and 2 irradiated SiPMs
- **Light Yield:**
 - Cast tiles produce about 2x more light than molded tiles
 - 4mm² SiPMs produce about 2x more light than 2mm² SiPMs
 - More data needed to confirm scaling factors
- **Irradiated SiPMs:** Preliminary results show that it is possible to extract a signal from irradiated SiPMs

Charge Measurement with HGCR0Cv2

Low and High Gain Modes

- Pulse amplitude before saturation: ADC measurement
- Pulse amplitude after saturation : TOT measurement

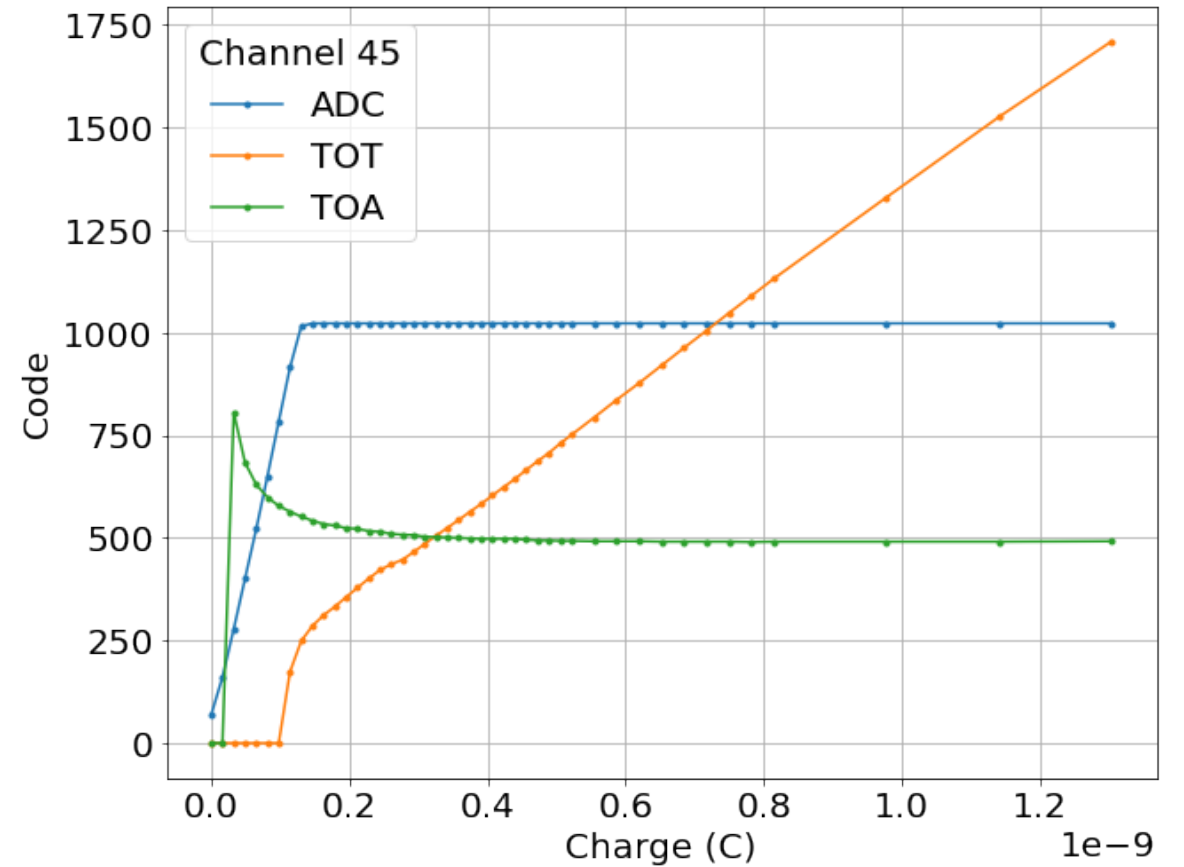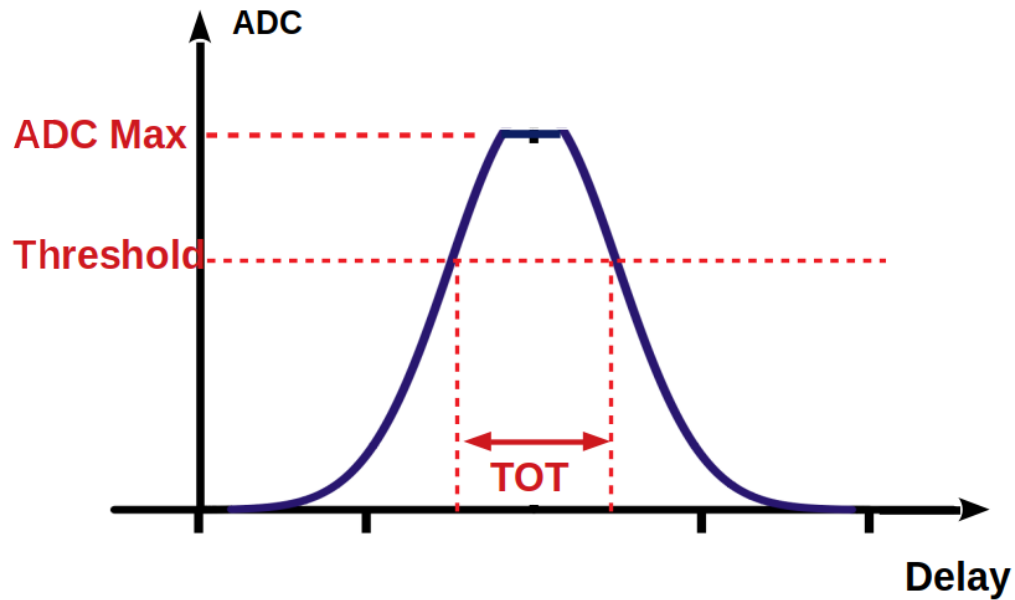


Measurement using external charge injection into the HGCR0C channel 45

Tileboard at the two test beams

SiPMs



- Bottom half of tileboard was equipped with Hamamatsu S14160 series SiPMs in both testbeams:
 - Custom made SiPMs for HGCal with improved radiation hardness
 - 12 cells with 15 μm , 2 mm^2 SiPMs
 - 12 cells with 15 μm , 4 mm^2 SiPMs
- SiPMs in 5 positions replaced in October testbeam with holder PCBs containing a SiPM (H1,H3,H4,H5,H7)
 - Irradiated SiPMs** (fluence: 2×10^{12} n/cm² at room temp: JSI Ljubliana)
 - 2 mm^2 and 4 mm^2 – one from each size
 - Un-irradiated SiPMs (for reference)
 - 2 mm^2 and 4 mm^2 – one from each size
 - One new 2 mm^2 SiPM with **WB** package

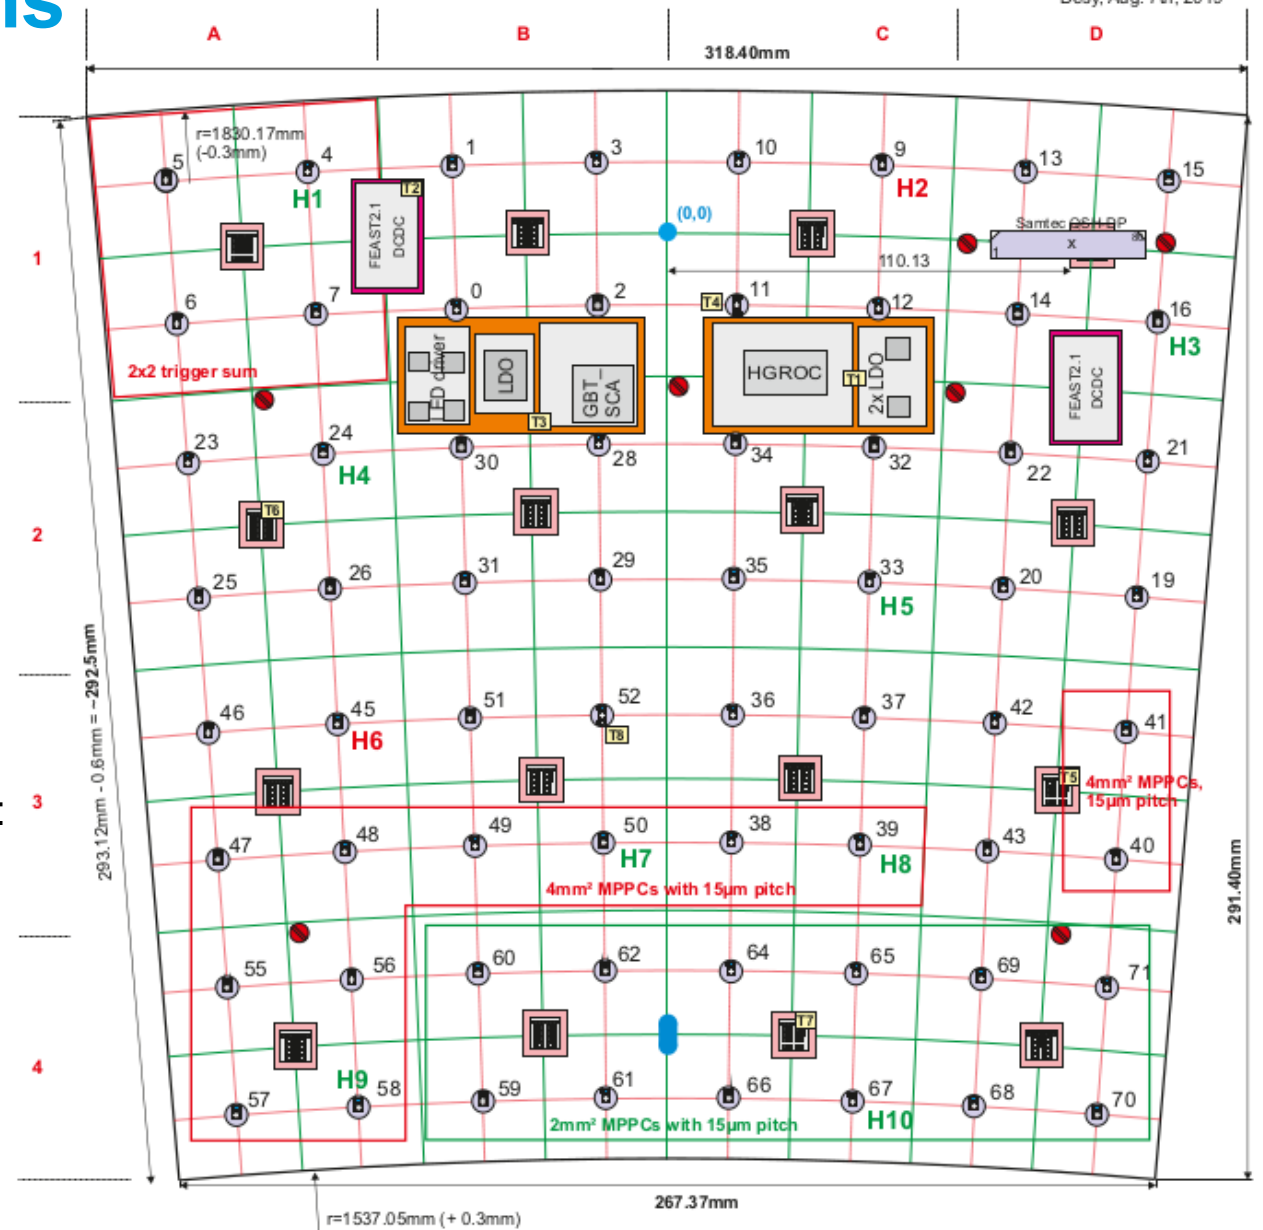

Tileboard at the October test beam

Scintillator Tiles in Configuration 1

- The lower half of tileboard is equipped with:
 - **MEPHI moulded tiles with envelope style wrapping**
 - R18, R20 Tiles
 - **MEPHI moulded tiles with long flap wrapping**
 - from previous beam test for reproducibility study
 - R18, R20 Tiles
 - **CALICE reference tiles**
 - With mechanical cut-out
 - Without mechanical cut-out
 - On SiPMs on holder PCBs
 - **IHEP cast tiles with envelope style wrapping**
 - Unpolished (Tiles marked UP)
 - R18, R20 Tiles

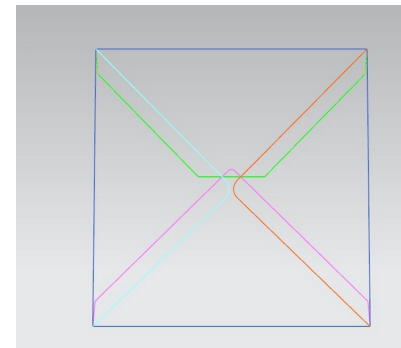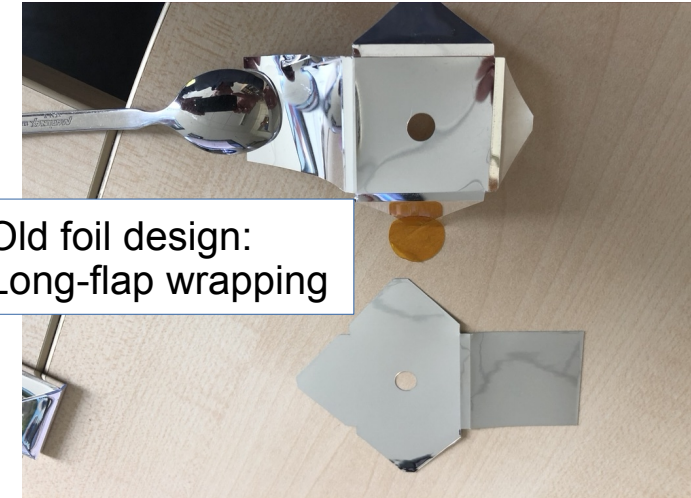

Foil Optimisation

Tests with small series (Felix Sefkow, Sept 2020)

Wrapping tests with long flap design

- Original idea: overlap limits light leakage

Long flap causes frequent problems at wrapping step

- does not occur in manual wrapping tests
- persists also with somewhat shorter or narrower flaps

Re-introduce creasing in foil preparation

- no noticeable difference
- wrapping tool produced sharp edges, too

Conclusion: need to withdraw our premature “green light” for long flap design



Flap bends up



... and blocks next one.





unwrapped foil without creasing



creased foil

MIP MPV Comparison of Two Testbeams

Reproducibility Test and Comparison of Old and New Wrappings

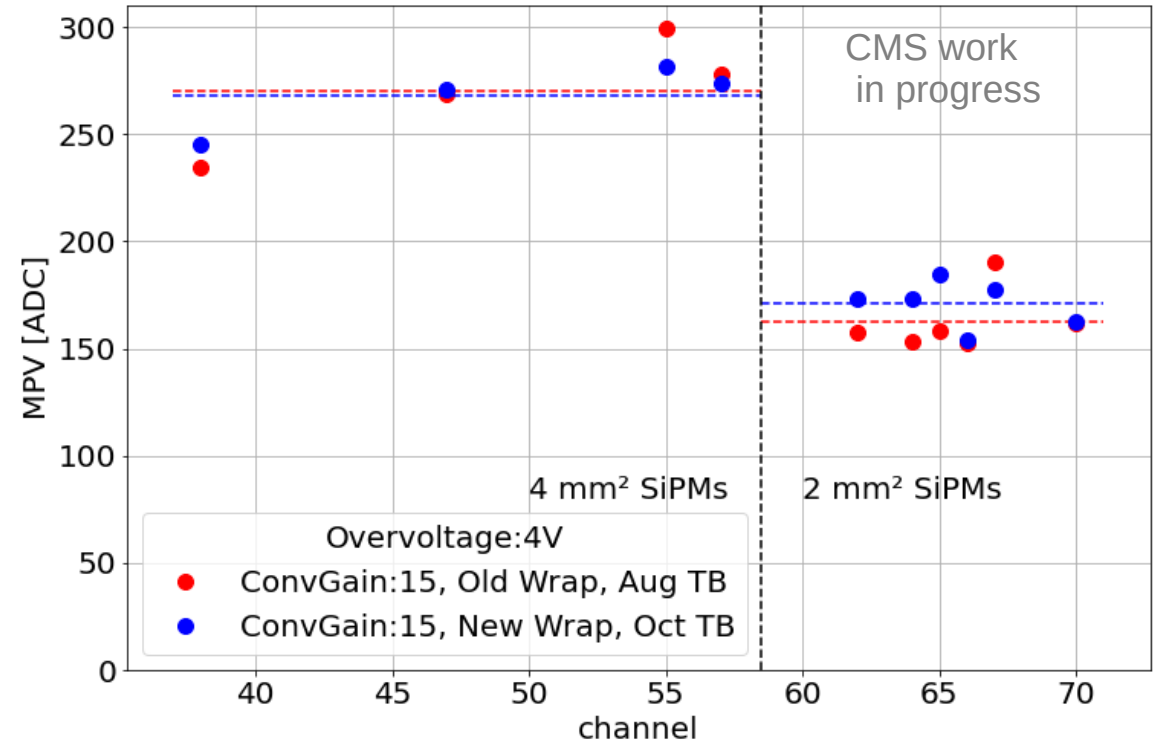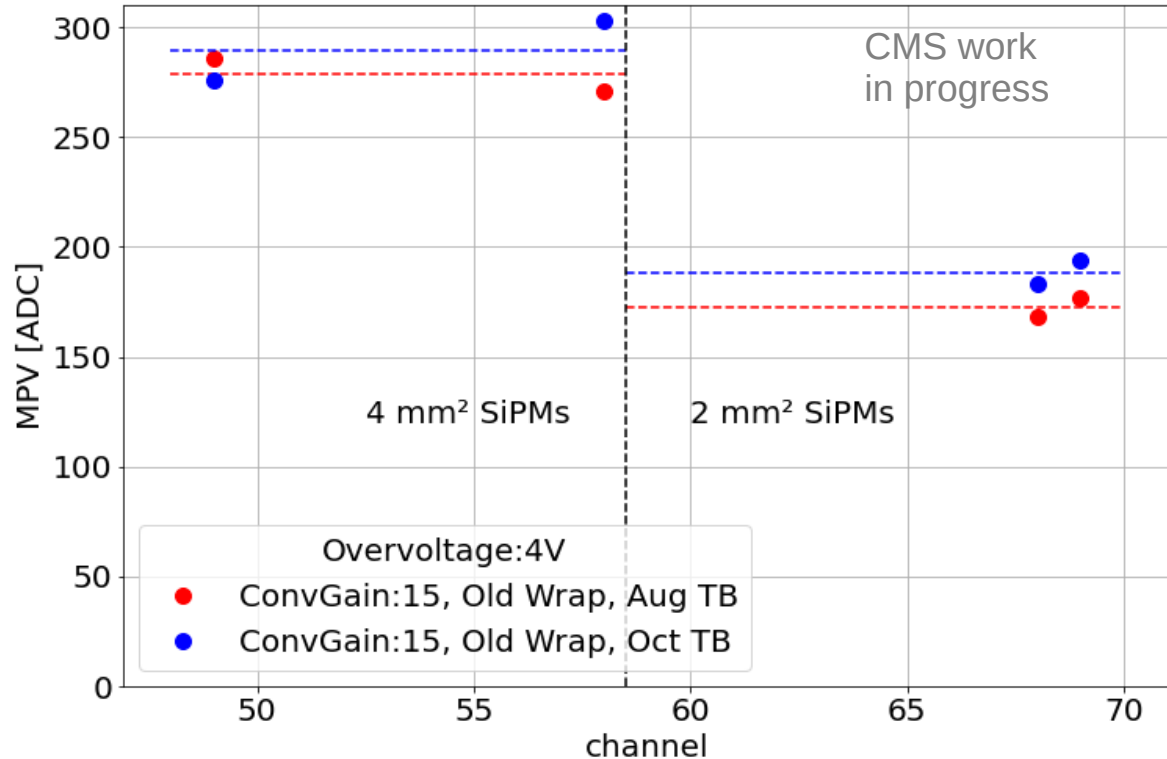

- Left plot:


- Direct comparison of long arm wrap (old wrap) between the two testbeams
- Results reproducible between two testbeams
 - 4-9 % difference in results

- Right plot:

- August testbeam: Consists of long arm wrap (old wrap)
- October testbeam: Same tileboard, envelope-type wrap
- Within uncertainties, no difference between two wrappings


Irradiated SiPM pulses

MIP MPV for Channel 33 for ConvGain:4 (4mm² SiPM)

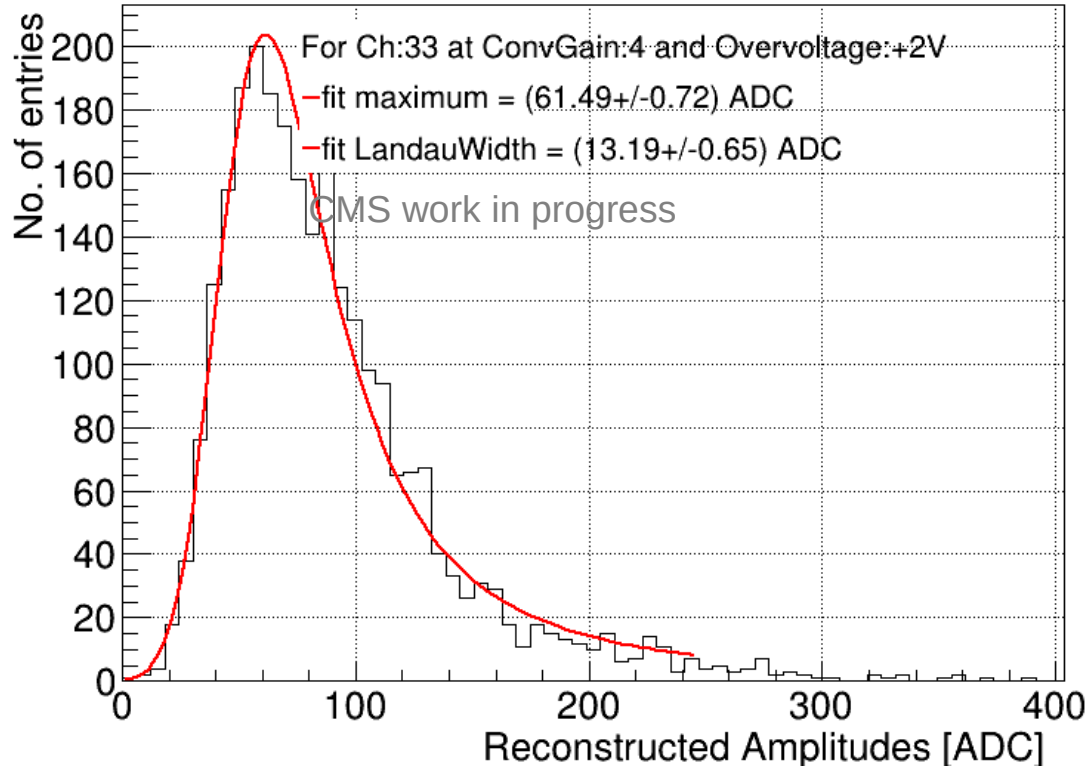

- Data plots with max between Bx:2 and Bx:4

Need More Data

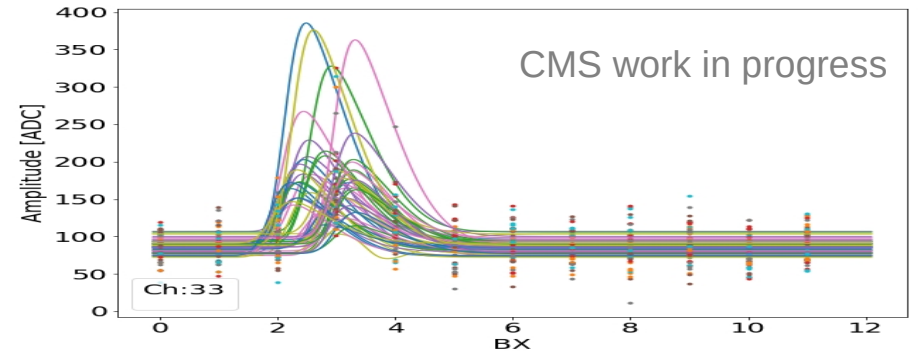

$$W_{irr} = \sqrt{W_{pedestal,irr}^2 + W_{signal}^2} \quad W_{noirr} = \sqrt{W_{pedestal,noirr}^2 + W_{signal}^2}$$

Where W_{signal} denotes the “genuine” width from the signal formation (Landau distribution and photo-electron statistics).

Since W_{signal} should be same for irradiated and non-irradiated SiPMs, and if we neglect $W_{pedestal,noirr}$:

$$W_{irr} = \sqrt{W_{pedestal,irr}^2 + W_{noirr}^2}$$

For irradiated Ch:33 SiPM (4 mm² SiPM):

$$\begin{aligned} W_{irr} &= 28.01 \text{ ADC} \\ \sqrt{W_{pedestal,irr}^2 + W_{noirr}^2} &= 26.33 \text{ ADC} \end{aligned}$$

For irradiated Ch:24 SiPM (2 mm² SiPM):

$$\begin{aligned} W_{irr} &= 20.64 \text{ ADC} \\ \sqrt{W_{pedestal,irr}^2 + W_{noirr}^2} &= 18.14 \text{ ADC} \end{aligned}$$